








M116 6 4-INPUT NOR GATES

GATES

M SERIES

Length: Standard
Height: Single
Width: Single

Price
\$20

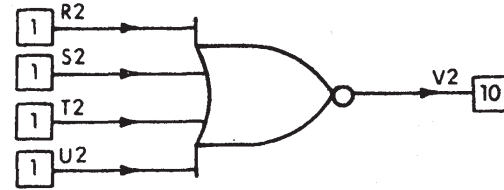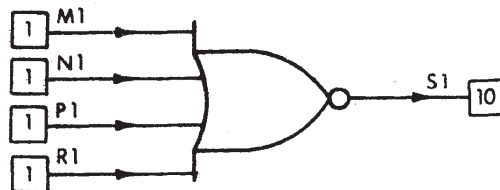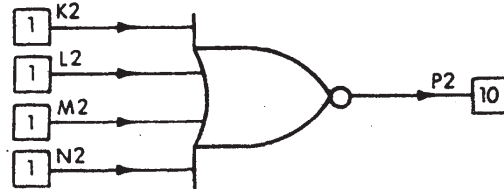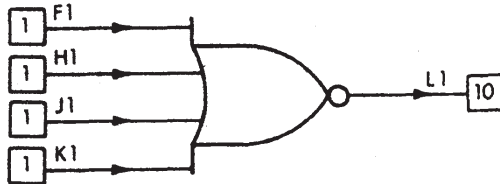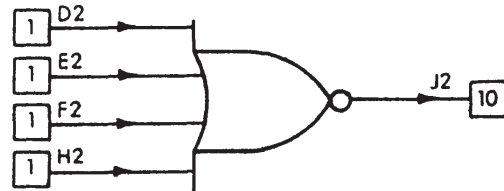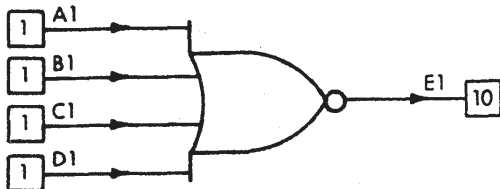

Volts	Power	Pins
+5	mA (max.)	A2
GND	30	C2, T1

The M116 module consists of six high-speed, 4-input, positive logic NOR gates. Pins U1 and V1 provide two separate logic HIGH sources (+3V), each capable of holding up to 50 unused M Series inputs HIGH.

APPLICATIONS

- Logic gating

SPECIFICATIONS

Maximum propagation delay to a logic HIGH or LOW is 10 ns.