


Universal One
Microprocessor Development Instrument
from Millennium

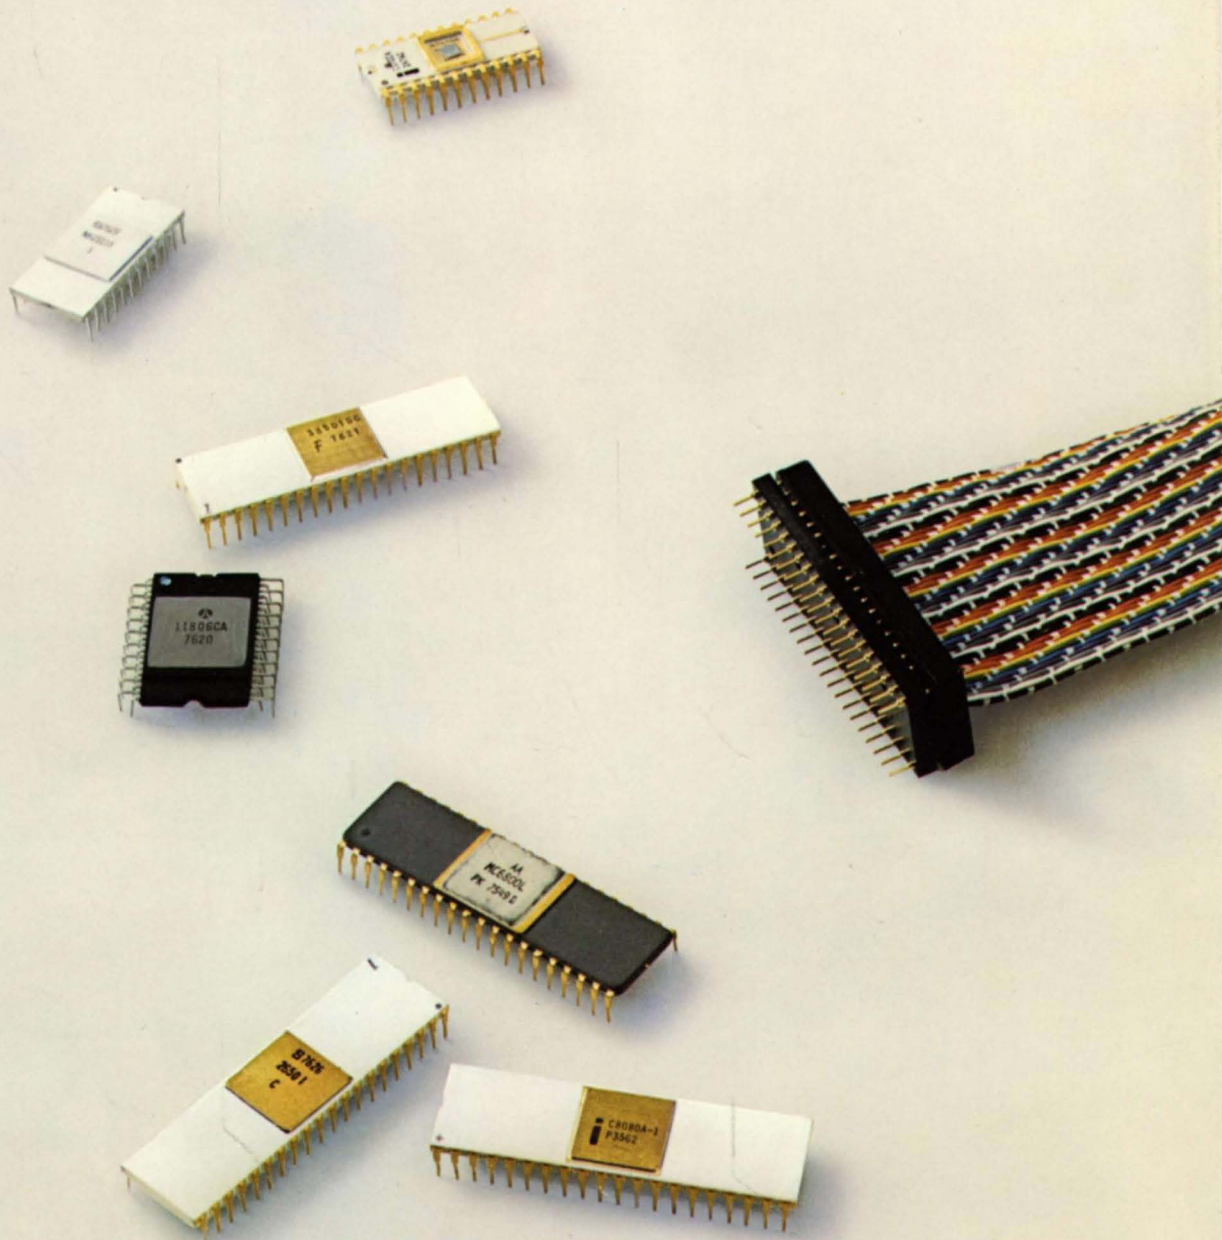

The universal development tool

It's a complete solution

Microprocessors are being hailed as the greatest invention since the transistor and as devices that will revolutionize our life styles. But before any of the advantages of microprocessors are realized, products must be designed, hardware tested, software written and the hardware and software integrated.


That's the problem. Until recently with the introduction of disk-based development instruments with in-circuit emulation, there has been no single solution for developing microprocessor hardware and software and integrating the two. The disk-based development instruments offered so far have had one major flaw. They work with only one microprocessor. If you can afford to purchase new capital equipment and train your personnel on a separate instrument for each new microprocessor, they provide a solution.

Millennium provides the complete solution to the development problem. With the introduction of the Universal One, Millennium offers the most cost effective instrument available today. The Universal One not only satisfies the microprocessor development needs of today, it provides for them TOMORROW.

For the most popular microprocessors now —and others in the future

Millennium's Universal One is a disk-based microprocessor development instrument that meets the needs of the hardware engineer, the programmer and the project leader. And, it provides easy-to-use techniques for implementing the most popular microprocessors; the 8080, 2650, and 6800. Universal One can be used with other microprocessors in the future by simply adding a printed circuit card for each new microprocessor.

The ability to interface with different microprocessors today and additional microprocessors in the future is the key benefit of the Universal One. It gives the system designer the freedom to choose the microprocessor best suited for an application without having to consider large capital expenditures for development instruments. System designers are already finding themselves "locked-in" to a particular microprocessor simply because of heavy investments already made in personnel training, software, and development aids. This could easily lead to design compromises which would

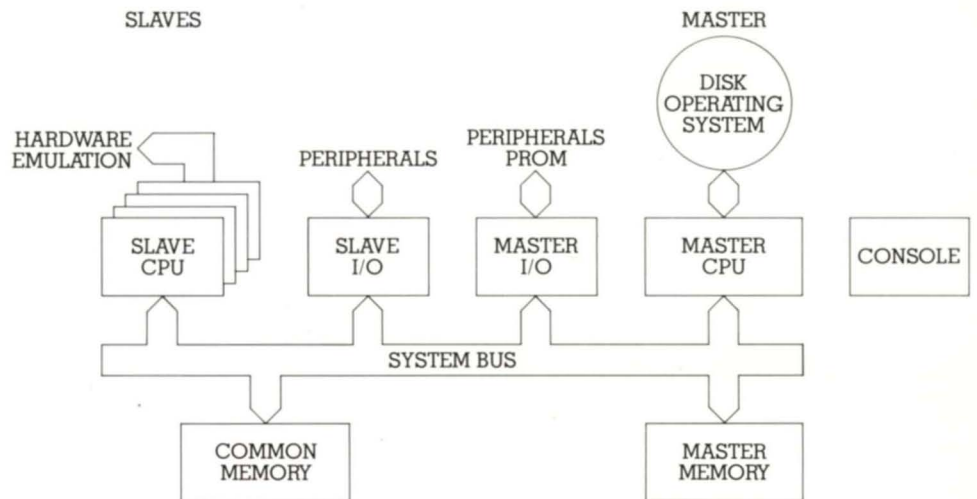

The Master/Slave architecture interfaces multiple processors through a universal system bus.

have an adverse effect on technical performance or the ability to produce the most cost effective product. The problem becomes even more pronounced as the semiconductor industry steadily introduces new microprocessors into the market.

Universal One will never be obsolete. The multiple CPU architecture allows all user application functions to be controlled by the Slave CPU in one section of the instrument and all of the system

application independent or system

related functions to be controlled by the Master CPU in the second section. Millennium will be providing additional Slave CPU boards as new microprocessors become available.

You can interact with Universal One through the front panel controls or via a standard terminal. English-like commands control all instrument functions.

Hardware and software debugging aids plus two stages of emulation help you move gradually from prototype design to full microprocessor system implementation.



Universal One has a complete integrated PROM capability. Front panel sockets accommodate the most commonly used PROMs; the 1702A MOS erasable, the 82S115 family of bipolar PROMs, and the 2708. Others will be added in the future. The front panel sockets permit PROM burning plus the ability to interchange data and programs between PROMs, disks, memory and other available peripherals. Tapes can also be made for automatic ROM masking.

The Master/Slave Architecture

The universal bus is the central element that ties the components together and permits the exchange of data and control signals. The bus was designed to easily accommodate the addition of many major components without change.

The dual (Master/Slave) CPU architecture is the key element of the design. It enables the hardware to support new microprocessors with the addition of a Slave CPU

printed circuit assembly. The Master/Slave design also guarantees that Universal One will stay abreast of new technology. Most existing or future 16-bit and 8-bit processors can be easily added.

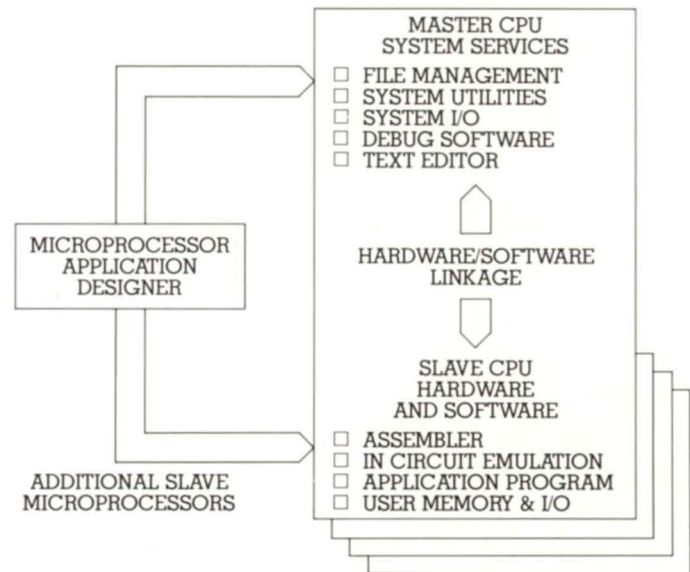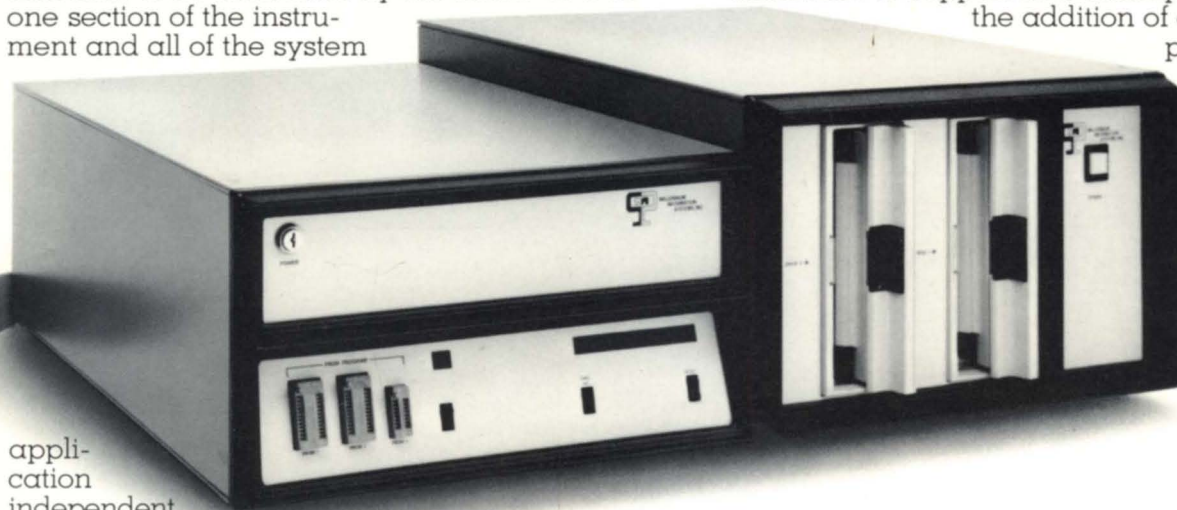

Separate Master/Slave functions. The Master serves the designer with a standard set of system services. Slaves perform hardware-dependent functions.

The universal development tool

With big system software capabilities

Universal Disk Operating System (UDOS) was developed specifically for and tailored to the multiple CPU architecture. The operating system is executed by the Master CPU in its own totally protected Master memory to prevent disruptions by application programs. The Master CPU controls multiple Slave CPUs that may have up to 65k bytes of slave memory. The operating system is universal and interfaces to any Slave supported by the system.

UDOS is disk file oriented, and is designed to fully use the capabilities of the flexible disk storage device. Many file management functions are performed automatically by UDOS. You need not be concerned with the structure or internal workings of the file management system. Merely direct that certain data be stored on or taken from a file.

UDOS was designed for use by engineers as well as programmers. The system provides the capability to develop and check out application software efficiently. You do not have to be concerned about mistakes. UDOS makes it difficult to make big errors and easy to recover from little ones.

The operating system allows development of microcomputer programs with a high level language (μ BASIC), a symbolic assembler, or with a combination of both.

You can prepare a program with a powerful Text Editor, correct and modify it quickly and easily, then assemble it, load the resulting object code into Common memory (or into your application memory), and run it under debug control.


During execution, the program steps can be traced, breakpoints can be set, and memory can be inspected and altered as required. Subsequently, the program can be corrected or modified at the source level, using the Text Editor, then re-assembled, loaded, and run again for the next round of debugging.

You need not create a file or otherwise establish the file before writing data on it. When you issue a UDOS command with a file name as an output device, and the file does not already exist, it will be created automatically and the given file name will be placed in the diskette directory.

You need not allocate space for a file before using it. Diskette space is dynamically allocated by UDOS as it is needed. When the file is CLOSED, the space which was allocated for the file is recorded in the directory. When the file is DELETED, the space allocated for the file is opened for other files.

Files can be concatenated (joined) into one file with a single UDOS command. This feature allows development of source programs in small, manageable pieces. Subsequently, all of the pieces can be combined and placed on a single file which can be assembled. If an error shows up in the assembly, only that "piece" of the source program which contains the error need be edited. All of the pieces can then be combined again and the assembly repeated.

All of the peripheral devices attached to Universal One are interrupt driven. This allows maximum use of Universal One's resources and greater throughput.

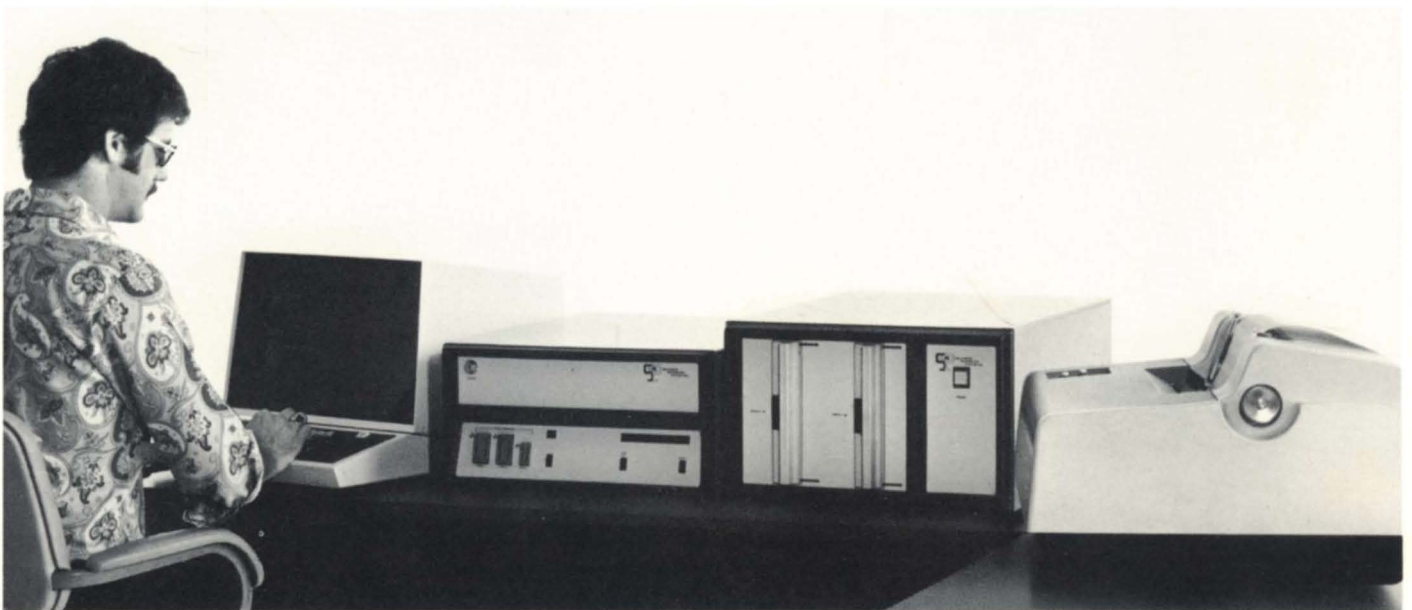

All input/output operations are performed through logical channels. You can assign any physical device attached to Universal One to any one of eight logical channels. You need not concern yourself with the characteristics of the physical device assigned to the channel. This feature allows preparation of programs whose input and output sources can be determined at run time. Channels can be assigned for a program externally through the console, or internally by the program itself. The logical channel capability also allows you to attach your own device to Universal One and easily add a new I/O driver to UDOS.

A sequence of UDOS commands can be executed one at a time for a "COMMAND" or procedure file. This feature provides the capability to invoke any number of UDOS commands simply by issuing the name of the command file. The individual UDOS commands in the file can be "filled" with parameters which are given at the time the file is invoked. This feature allows you to set up frequently used command sequences as a procedure which can be invoked simply. Command files can be chained. i.e., the last UDOS command in a command file can be the name of another command file. This allows a series of jobs to be initiated for unattended processing.

Text Editing

For program editing and debugging tasks, Universal One provides a file oriented line pointer editor. For advanced editing, macro and iteration capabilities permit combining multiple commands into one complex command that can be executed repeatedly. You can even use UDOS commands to initiate system functions during a text editing session.

Debugging

The instrument contains hardware assists to permit a complete and comprehensive debug package. The combination of debug hardware and software provides powerful capabilities. There are two memory address breakpoint registers. These may be set to give a break on memory fetch only, memory write only, or on memory read/write access. Another capability is dynamic trace. This means that on an instruction by instruction basis, you can trace the activity of the program being executed, display the location of the instruction, the mnemonic of that instruction, the register contents, and the state of the machine.

There are two dynamic trace options available. You may trace every instruction or only the jump instructions. The jump instruction trace reduces printout time and executes through the program faster. If, however, you have isolated a problem area, you may then go back to a full trace mode and examine every instruction. There are commands that permit you to display and alter memory. You may inspect and change the contents of the registers. You may interact with your program and change variables—change register contents and change the data elements being used in the debug process. The table lists the Debug module commands.

| DEBUG COMMANDS | NORMAL (NON-EMULATION) | SLAVE MEMORY EMULATION MODE | PROTOTYPE MEMORY EMULATION MODE |
|---------------------------|------------------------|-----------------------------|---|
| DEBUG | Yes | Yes | Yes |
| TRACE | All capability | All capability | No Mnemonics or hex instruction printed |
| SET (Processor Registers) | Yes | Yes | Yes |
| RESET (Slave Processor) | Yes | Yes | Yes |
| BKPT (Set Breakpoints) | Yes | Yes | Yes |
| CLBP (Clear Breakpoints) | Yes | Yes | Yes |
| PATCH | Yes | Yes | No |
| DUMP | Yes | Yes | No |
| EXAM | Yes | Yes | No |

With multiple-mode emulation

A primary value of Universal One to the hardware designer occurs when the software is integrated with the hardware. During integration, a cable is inserted into the microprocessor socket of the prototype (or breadboard) system. Universal One then provides multiple modes of real-time, in-circuit emulation.

In one mode, Universal One emulates the prototype's microprocessor and its memory while input/output functions are controlled by your hardware. All of the debug commands (see table) are available to aid you in this mode. Once the prototype has been debugged in this mode, the prototype uses its own memory and input/output capabilities. When the prototype is fully tested in this mode, the cable is removed and the microprocessor reinstalled.

When operating with the prototype memory, most of the debug features are still available. You can use the address breakpoint and perform a full trace. If this mode requires the use of PROM memory, the assembled program can be directly programmed into the PROM chips by Universal One. If the object program resides on paper tape, it can be loaded into Universal One and transferred to the PROMs.

With real-time trace

Universal One's real-time trace capability provides a continuous record of 64 real-time processor transactions relative to a designated event. The events can be any combination of address, control, data or auxiliary data conditions.

Memory Mapping

You can map prototype or systems Slave memory into the Slave microprocessor's address space in 256 byte blocks. This allows selective execution of programs in any combination of Universal One or prototype memory.

The universal development tool

Universal Emulator

If you have a means for assembling and debugging programs but need hardware emulation and PROM programming capabilities, the Universal Emulator is the solution. The Universal Emulator Instrument contains all the hardware emulation and PROM programming features of Universal One.

With the Universal Emulator you can easily debug prototype hardware and integrate the software without having to build special test fixtures. Interaction with the prototype product is through the Universal Emulator's expanded front panel.

If you decide you need the additional software capabilities of Universal One, you can upgrade in the field at any time by adding memory and the floppy disk subsystem.



Universal Emulator

For fast, efficient programming

μ BASIC is a proprietary software language developed by Millennium especially for microprocessor prototype development. It contains many of the same statements found in BASIC plus other statements that are particularly useful during integration.

μ BASIC is a code-emitting, high-level language compiler designed specifically for the microprocessor application engineer or designer. μ BASIC was designed for logic designers, engineers and programmers. It offers all of the advantages of a high-level language, including greater programming productivity, easier program maintenance, and application portability from one microprocessor to another. The compiler produces Assembly language statements that are subsequently processed through the assembler to produce object code for the microprocessor application.


The advantages of μ BASIC in a development effort are:

Speeds programming time

Coding is much easier and faster with μ BASIC. μ BASIC programs require only a fraction of the number of statements that Assembly language programs require. μ BASIC is also a simple language to learn. Most engineers can learn it themselves in a few days. Coding is not much more involved than writing down the series of steps needed to input, manipulate and output data.

Permits code optimization

When code must be reduced to fit memory, or when optimum execution speeds are needed, μ BASIC statements can be intermixed with Assembly language statements in the same program.

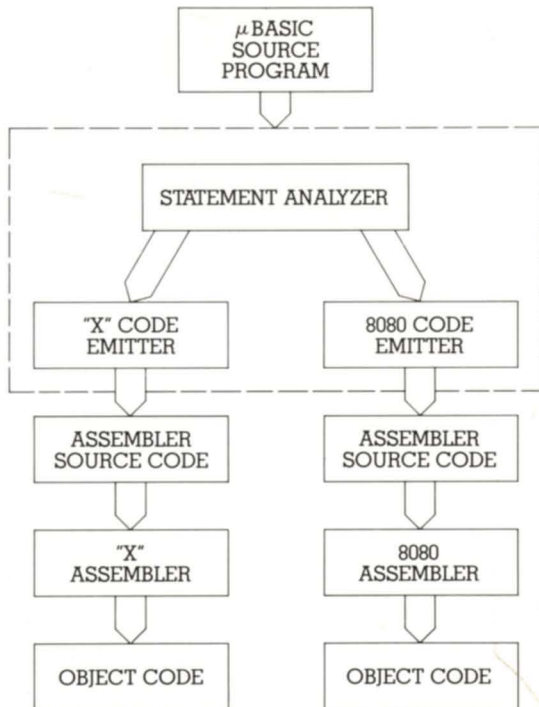

Complete customer support

Millennium provides the before and after sales support to assure you of a solution that will meet all your needs.

Documentation—Millennium provides all software and hardware manuals in addition to complete service manuals.

Warranty and service

The Universal One and the Universal Emulator are fully warranted for 90 days. Return any defective unit to Millennium and it will be quickly repaired or replaced without charge. Millennium supports on-site, user maintenance with:

- Service Training
- A diagnostics and spare parts kit
- Fixed price board repairs

Other arrangements are available based upon customer needs.

For today's and tomorrow's development needs

Universal One and Universal Emulator are the answers to today's and tomorrow's microprocessor development needs. Both are specifically designed to operate with newer microprocessors as they become available. Neither instrument will become obsolete.

The powerful universal disk operating system (UDOS) makes Universal One a useful tool in the hands of experienced and inexperienced programmers alike. μ BASIC is a valuable time and money saver because of the ease with which programs can be developed and debugged.

Universal One's and Universal Emulator's hardware emulation capabilities vastly ease the development effort from design to implementation.

Join the productive generation with a Universal One or Universal Emulator Development Instrument. Both are available for delivery.

UNIVERSAL ONE COMMAND SET

SYSTEM CONTROL COMMANDS

| | |
|-----------|---|
| ESC | Returns control to operator |
| SPACE BAR | Stops and continues console output |
| SUSPEND | Suspends execution of active programs |
| CONT | Continues execution of a suspended program |
| ABORT | Aborts active UDOS or User programs |
| ASSIGN | Connects Slave I/O Channel to system device |
| CLOSE | Disconnects and closes the channel |

SYSTEM OPTIONS

| | |
|--------|--|
| SEARCH | Controls the Automatic File search capability |
| SYSTEM | Designates the system Disk Drive |
| DEVICE | Informs UDOS of the peripheral device availability |
| CLOCK | Enables or disables Real Time Clock |

SYSTEM UTILITIES

| | |
|--------|--|
| FORMAT | Formats the diskette for use by system |
| VERIFY | Determines if bad blocks exist and catalogs them |
| RENAME | Changes the name of a Disk file or Disk identification |
| DUP | Duplicates Diskettes |
| LDIR | Lists the directory of a specified Diskette |
| DELETE | Removes files from a Diskette |
| COPY | Copies data from a file or device to another file or device |
| PRINT | Copies specified data from a file or device to another file or device with or without line numbers |

OBJECT PROGRAM UTILITIES

| | |
|--------|---|
| MODULE | Writes a Binary Load Module from Slave Memory to a file or device |
| RHEX | Reads a Hexadecimal object file into Slave Memory |
| WHEX | Writes a Hexadecimal object file from Slave Memory |
| CSMS | Translates an SMS file and then compares the file with Slave Memory |
| WSMS | Writes a block of Slave Memory in SMS format |

SLAVE MEMORY AND CPU COMMANDS

| | |
|--------|--|
| GO | Starts user programs |
| LOAD | Reads Binary Load files into the Slave Memory |
| XEQ | Combines LOAD and GO |
| DUMP | Displays the contents of Slave Memory on a specified device |
| EXAM | Allows you to examine or alter Slave Memory |
| PATCH | Allows you to alter Slave Memory with a string of Hexadecimal characters |
| STATUS | Displays the status of the Slave CPU and the job being executed by it |
| SLAVE | Sets the Emulation mode of the Slave CPU |

SLAVE DEBUG COMMANDS

| | |
|-------|--|
| BKPT | Sets breakpoints |
| CLBP | Clears breakpoints |
| RESET | Generates a RESET pulse to the Slave CPU |
| SET | Allows you to set Slave CPU registers |
| DSTAT | Displays Debug Status |
| TRACE | Allows you to trace Slave CPU execution |

μ BASIC COMMAND SET

μ BASIC is a simple, easily used, efficient compiler. The compiler produces an easy-to-read assembly listing after each statement which shows the machine instructions that are used to execute the logic of the statement. Data types and one dimensional arrays can be either one or two bytes. The DIM statement is used to specify the array size and optionally the origin of the array. Statement types include assignment, FOR, NEXT loop control, IF, GOTO, GOSUB, RETURN, INPUT, PRINT, and computed GOTO as well as computed GOSUB.

The language does not support complex expressions. All expressions are in the form:

A = B(operation)C

Any or all of the variables can be subscripted:

A(I) = B(J) (operation) C (K)

The simpler expression forms can also be used. For example: A = 5.

Operations permitted are add (+), subtract (-), multiply (×), divide (/), AND, OR, XOR, NOT, shift right, shift left, shift right circular, shift left circular. The usual set of relational operations (<, >, =, <=, >=, < >) are supported in the IF statement.

TEXT EDITOR COMMAND SET

INVOKING THE EDITOR

| | |
|--------------------------------|--|
| EDIT INFILENAME OUTFILENAME | Designates the primary Input File and the primary Output File |
| EDIT FILENAME | If Filename exists then Filename will be edited to itself. If Filename is a new file it will be the primary Output file |
| EDIT | No primary Input or Output Files have been defined To Input or Output data, file name must be designated in the PUT & GET Commands |

TEXT INSERTION

| | |
|---------------|--|
| INSERT STRING | Inserts the String before the current line in the Buffer |
| INPUT | Places the editor in the Input Mode |

DELETION

| | |
|--------|------------------------------|
| KILL N | Delete N Lines in the Buffer |
|--------|------------------------------|

ALTERATION

| | |
|---------------------------------------|---|
| SUBSTITUTE \$STRING 1 \$STRING 2\$ | Substitutes Text String 1 with the Text in String 2 |
| REPLACE STRING | Replaces the current line with the text String |

SEARCH

| | |
|-----------------|--|
| FIND \$STRING\$ | Searches the Buffer, starting at the current line, for the first line that contains the text String. |
|-----------------|--|

INPUT/OUTPUT

| | |
|------------------------------|---|
| GET N (FILENAME) * | Reads N Lines of data into the Buffer above the current line pointer |
| PUT N (FILENAME) * | Writes N Lines of data from the Buffer starting at the current line pointer |
| LIST N | Lists N Lines of data on the line printer |
| COPY N INFILE (OUTFILE) * | Copies N Lines from Infile to Outfile * If the Filename is not specified, the primary Input or primary Output file is used as appropriate. |

LINE POINTER COMMANDS

| | |
|--------|--|
| BEGIN | Positions the line pointer to the first line of the Buffer |
| END | Positions the line pointer to the last line plus one of the Buffer |
| DOWN N | Moves the line pointer down N lines |
| UP N | Moves the line pointer up N lines |
| N | Displays the line number of the current line pointer |

UTILITIES

| | |
|--------------------|---|
| AGAIN | Performs the previous "repeatable" command |
| FILE | Transfers all the data and the remaining primary Input file to the primary Output file. Terminates the edit session |
| TYPE N | Displays N lines |
| QUIT | Terminates the edit session |
| TAB CHAR | Defines the single CHAR as the tab character |
| TABS C1 C2 C3..... | Sets the tab position to the given columns C1, C2, C3..... |
| m<COMMANDS> | Causes the command inside the angle bracket to be repeated "m" times |
| ? | Displays the Editor I/O Status |
| / | Finds the error in MACRO String |
| BRIEF | Inhibits or initiates typing after certain commands are executed by the editor |

MACROS

| | |
|--------------------------|---|
| MACRO M = COMMANDLINE | MACRO definition command, M is an integer which identifies the MACRO number |
| MACRO M | Command executes the MACRO M |

Millennium
420 Mathew St.
Santa Clara, CA 95050
(408) 243-6652

REPRINTED FROM

A MCGRAW-HILL PUBLICATION

Electronics[®]

Reprinted from *Electronics*, September 16, 1976 Copyright © 1976 by McGraw-Hill Inc. 1221 Avenue of the Americas, New York, N.Y. 10020

MASTER-SLAVE PROCESSORS LIBERATE DESIGNERS



Technical articles



Adaptability to various microprocessors comes from separating prototype- and system-related tasks; in-circuit emulation and new high-level language are bonuses



'Universal' development system is aim of master-slave processors

by Robert D. Catterton and Gerald S. Casilli, *Millennium Information Systems Inc., Santa Clara, Calif.*

□ In the ever-changing world of the microprocessor, one element is fixed: heavy investments in personnel training, software, and development aids can lock designers into a particular processor for their systems. Each recently introduced hardware and software development system, for example, is based on a particular family of devices and isn't easily adaptable to other families. What is needed to free the designer from design compromises that reduce performance or cost effectiveness is a "universal" development system that can accommodate many different microprocessors.

A new system, called the Universal-One, achieves universality by a division into two functional areas. Those tasks that are related to the development system are assigned to a master central processing unit, and those that are prototype-related are assigned to a second,

or slave, CPU. As many as four different slaves may be installed simultaneously and individually used through operator commands. This multiple architecture enables the hardware to support new microprocessors with the addition of a pc card containing the new slave CPU.

Since the master processor need not be changed to accommodate new slave units, all of the operating system software remains the same. Presently, the system supports the 8080A and the 2650 central processors as slaves, with in-circuit emulation capability. It's easy to add other 8-bit processors to the system, and 16-bit devices may be added with only relatively little reconfiguration.

Although universality is the basic objective, there are four other major requirements that today's development systems should satisfy. Use of a disk-based storage

system will achieve high throughput for maximum software-development productivity. A disk-based operating system should be specifically tailored for microprocessor development. The user's interface with the system should be simple and remain unchanged regardless of the processor under development. The test and debug capabilities should support development of hardware and software and their integration into an operating prototype system.

Functions

The master CPU is responsible for all of those system services that are not prototype-dependent, such as:

- File management—the storage and retrieval of data and programs.
- Text editor—maintains text files contained on the disk.
- System input/output—the normal I/O activities between the standard system peripherals, such as flexible disk, printer, and terminal.
- System utilities, including programming of read-only memories for the final version of the prototype.
- Debug functions—the master executes the debug software and controls the slave through a separate debugging hardware module.

The slave CPU's functions include:

- Program assembly—each slave may be used as a resident assembler of prototype programs.
- Prototype-program execution—the prototype program is loaded into the slave memory and executed by the slave.
- Prototype I/O—any special input/output required in the prototype is performed by the slave.

- In-circuit emulation—a cable extends from the slave to the CPU socket in the prototype.


The system architecture (Fig. 1) includes a bus structure to tie the components together and to permit the exchange of data and control signals. The basic bus design was governed primarily by the dual-memory and the multiple-CPU architectures. Other design considerations for the bus were that the memory portion had to be able to handle 8- and 16-bit data words, and that the overall structure had to accommodate future higher-speed microprocessors.

The system services the peripheral I/O devices and debug logic with interrupts rather than with polling. With an interrupt-driven system, the peripherals can get service when they need it, without waiting for their turn in the polling sequence. It also allows an efficient software structure that is relieved of the overhead inherent to polling. In this way, maximum throughput is achieved.

Memory structure

The random-access memory of the system is organized as 65,536 bytes of common memory and a 16,384-byte master memory. The logic on the master CPU module allows appending any one of four 16-kilobyte segments of common memory (Fig. 2) to the master memory space. This allows master-slave communication for transfer of data during I/O service requests and gives the master access to program-trace information developed by the debug logic discussed later.

Master-memory protection is accomplished by a special bus-control signal, which is sensed on the memory cards. Only the master CPU contains the

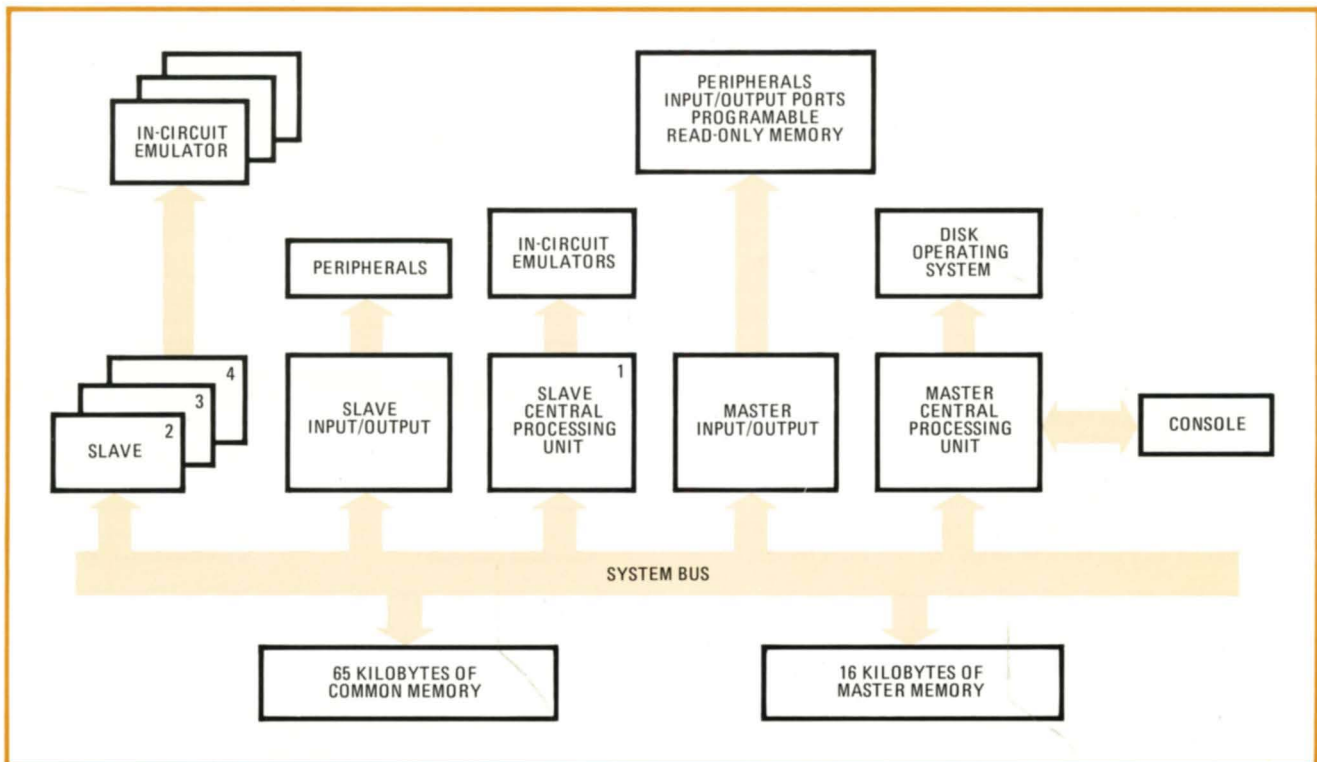

1. Two CPUs. The Universal-One system uses two central processing units—master and slave. In-circuit emulation is performed through the slave CPU, which duplicates the type of microprocessor used in the prototype. The master CPU handles system-related functions.

A new compiler

To go along with the development system, Millennium has developed μ Basic, a high-level language compiler designed for microprocessor applications. Although it was tailored to meet the needs of engineers, it also provides a useful tool for the professional programmer.

The new compiler offers the advantages of a high-level language—greater programming productivity, easier program maintenance, and portability from one microprocessor to another. In the Millennium development system, it also provides a "universal" programming capability, since the same μ Basic statements can produce object programs for the different microprocessors.

As shown in the figure, μ Basic statements are first brought into the "statement-analyzer" software package, where they are converted for input to the code emitter. Then, depending on the microprocessor and resident assembler being used, the code emitter generates the assembly-language statements, which are subsequently passed through the assembler to produce object code for the selected microprocessor. This two-step compilation process gives the programmer more flexibility when working out the program for the prototype.

A major criticism of high-level languages in microprocessor applications is that more memory is used than with assembly languages, and execution is slower. However, μ Basic allows the programmer to intermix assembly language. In situations where a programmer thinks it necessary, this intermixed assembly language may use the same labels and variables as does the μ Basic program.

A debug-optimize report produced by the compiler helps avoid software error conditions that the two-step compilation process might cause. The report shows the μ Basic statement followed by the assembly-language listing that was generated to perform the original statement.

Typically, a programmer would first code and debug the program without regard to memory or performance constraints. Then, when the program is functioning correctly, the debug-optimization report can be used to show those areas that may require assembly coding to optimize memory usage. Since memory comes in fixed increments, the most important optimization is usually done when the program size exceeds that specified increment. If the program generated by μ Basic does not exceed the memory increment available, then assembly-language optimization may not be needed.

Performance optimization also can be in assembly language. Usually, some small portion of the code is used most of the time—for example, 10 to 15% of the code might be used 80 to 90% of the time. Consequently, a concentration on those heavily used portions will produce the greatest increase in performance.

In its data and statement types, μ Basic is generally equivalent to PL/M. The length of the data element may


be either 8 or 16 bits, and both 8 and 16-bit elements are supported at the same time.

Examples of statement types are:

- LET—the assignment statement.
- FOR . . . NEXT—used for loop construction.
- IF—the test statement.
- GOTO, GOSUB, RETURN—control transfer statement.
- ON—for a computed GOTO or GOSUB.

The μ Basic compiler features an ability to specify memory locations for arrays. This is quite important in connecting a peripheral device to the system. Many peripheral devices operate out of a dedicated-space memory. To conveniently interface a program written in a higher-level language to that device, the programmer must be able to position the array in the same location in memory that the device is using. This is also very important in microprocessor systems where there is a RAM/ROM trade-off. The programmer can control the origin of the portions of the program to be put in ROM and RAM.

In comparing μ Basic with PL/M (the most widely used high-level language), it can be seen that the latter is a "richer" language. A professional programmer is comfortable using PL/M and can take advantage of its greater complexity. However, the logic designer or other nonprofessional programmer probably will have to expend some effort to learn enough about PL/M to be able to write programs using it. In contrast, μ Basic is easy to learn and use, while being quite effective.

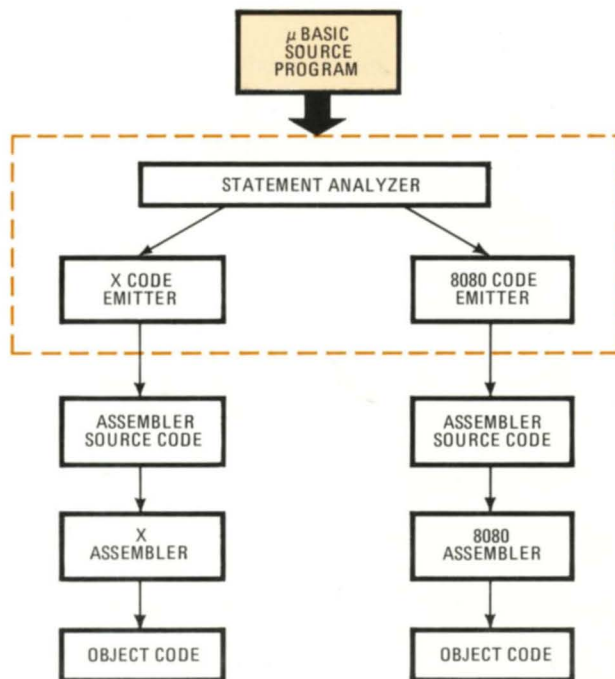

circuitry to activate this control line. Thus, the slave processor cannot gain access to the master memory and destroy its contents or (through damage to the file manager or part of its data structure) the files themselves, out on the disk.

The slave can address the common memory as a 65-kilobyte or as a 32,768-word, 16-bit memory. This allows

the 8-bit master to address a 16-bit slave memory as sequential bytes.

There are also commands that permit the operator to display and alter common memory. He may inspect and change the contents of the memory, and he may display and alter the contents of the registers. He may interact with his program and change variables—change register

Using the software

The Millennium development system has many software features related to its use of a floppy disk for mass storage and the UDOS operating system for the disks. The system can have up to four floppy-disk drives all in use at the same time. A file name in use on one disk can be the same as one on another. The user can specify the file he wants by appending the floppy-disk drive number to the file name; i.e., TESTPROG/1 or TESTPROG/2.

Through use of the VERIFY command, a user can check the floppy disks to determine if any of the tracks are bad. The bad tracks are recorded in the disk's directory and thereafter are not allocated to a file.

The user need not create a file or otherwise establish it before writing data on it. When he issues a UDOS command with a file name as an output device, the file will automatically be created, and the name will be placed in the directory for the floppy disk.

The user need not allocate space for a file before using it, for disk space is dynamically allocated by UDOS as it is needed. When the file is closed, the space allocated is recorded in the directory. When the file is deleted, the space allocated is freed up and made available for allocation to other files.

A file name may contain as many as eight alphanumeric characters and special characters. This allows the user to use names that are more indicative of the file content; i.e., PROGLIST rather than PRGLST, or, worse yet, PGLS. A disk file may contain anywhere from 1 to 311,296 data bytes. The user need not concern himself with extraneous data or otherwise keep track of the number of "real" data bytes in his file.

The entire contents of a disk can be duplicated in another. This feature allows back-up of important disks and allows the user to recover if a file is inadvertently deleted, written over, or otherwise destroyed.

Disks can be identified with a string of up to 44 ASCII characters. Users can thus briefly describe the contents of the disk and the date it was created, and need not rely totally on the label, which could become marred or destroyed.

The user can string together a group of files into one with a single UDOS command. This feature allows development of the source program in small, manageable pieces. Subsequently, all of the pieces can be combined

and placed on a single file, which can be assembled. If an error shows up in the assembly, only that piece of the source program which contains the error need be edited. All of the pieces can then be combined again and the assembly repeated.

All I/O operations can be assigned to channels by software. The user can assign any device attached to the system to any one of up to eight I/O channels and need not concern himself with the characteristics of the device. This feature allows the user to prepare programs whose input and output sources can be determined at run time. Channels can be assigned for a program externally through the console or internally by the program itself.

A sequence of UDOS commands can be executed one at a time from a command file. The user can thus invoke any number of commands simply by issuing the name of the command file. The individual command can be filled with parameters that are given at the time the command file is invoked. Thus frequently used command sequences can be invoked simply. Command files can also be chained—the last UDOS command in a file can be the name of another file, allowing a series of jobs to be run in a batch mode, perhaps overnight, unattended.

The text editor is line-oriented and has a command repertoire similar to those available on large time-sharing systems. The user can create a file of assembly-language statements or a data file by entering lines of text through the system console. Subsequently, he can insert lines anywhere in the file, delete lines, replace them, or modify part of the text on a line.

During a text-editing session, the user can get lines of text from any file and merge them into the file being edited or put lines of text from the file being edited to any other file. This feature provides the capability of manipulating lines of text from several files and merging them into one file quickly and easily. With the text editor, the user can combine several text-editing commands into one complex command and then cause it to be executed several times.

The user can set tabs dynamically and designate any console key as the tab character at any time during a text editing session. He can also issue UDOS commands and cause other system functions to be initiated during a text-editing session.

contents or change the data elements being used in the debug process.

The disk operating system

A universal disk operating system called UDOS was developed for the multiple-CPU architecture. This software is executed by the master in its own totally protected master memory. The UDOS feature is floppy-disk-oriented, taking into account the characteristics and peculiarities of such disks. Many file-management functions usually performed by the user are performed automatically. The user need only direct that certain data be stored on a file or taken from a file.

The operating system allows the user to develop microcomputer programs with a high-level language (see "A new compiler"), a symbolic assembler, or both. The user can prepare a program with a text editor, correct

and modify it quickly and easily, assemble it, load the resulting object code into common memory (or into the prototype memory), and cause it to be executed under debug control.

During execution, the program steps can be traced, breakpoints can be set, and memory can be inspected and altered as required. Subsequently, the program can be corrected or modified at the source level, using the text editor, then reassembled, loaded, and executed again for the next round of debugging. (see "Using the software").

In-circuit emulation

Each slave contains circuitry to support in-circuit emulation. When the prototype becomes ready for test, all of the development-system resources become available to it once the emulator cable is plugged into the

microprocessor socket of the prototype. The operator can then use the system's debugging software to debug the prototype hardware and software and then to integrate them.

The system supports two operating modes for emulation. In one, the user can substitute the memory of the development system for that of the prototype. In the other mode, when the prototype's memory becomes available and its I/O functions have been thoroughly tested, the operator can execute programs from the prototype memory while maintaining full control through the development system.

When operating with the prototype memory, most of the system debugging features are still available. The user can use the address breakpoint and do a full trace. If this mode requires the programmable ROM of the final prototype, the master can directly program the assembled instruction into the PROM chips. If the object resides on paper tape, it can be loaded into the system and transferred to the PROMS.

The user can switch emulation modes at any time by a console command, with no hardware changes. The cable may be left attached to the slave even when the emulation feature is not in use.

The development system's memory is comparable to the memory speed of most prototype systems, and thus it nearly simulates real-time operation when programs are executed from the system. When programs are executed from the prototype memory, the slave can operate at the the prototype's clock and memory speeds. Timing differences resulting from the use of the umbilical cord are minimal.


Master-slave interaction

When input/output from a master-controlled peripheral is required by a slave program, the slave CPU executes a service-request instruction, which causes the slave to pause temporarily while the master obtains the necessary data for the slave program. When the I/O requirements are completed, the master releases the slave so that it may continue the process of program execution.

The debug logic is on a separate module and includes breakpoint registers, address-computation circuitry, two program-counter registers, and single-step and interrupt logic. The functions controlled by this logic are independent of the slave microprocessor and thus support the universal aspects of the system design for application to a variety of target processors.

Part of the master-slave interaction includes control of breakpoint and trace operations. The master loads the breakpoint addresses under command from the user. When the memory address and operation from the slave match the breakpoint value, the program running under the slave pauses, and control is passed to the master. The debug module stores the slave's instruction-fetch address to enable the software to examine the prototype program and to interpret operating codes for the trace printout. Synchronization signals are provided to aid the user in triggering events necessary to debugging of prototype hardware.

The two memory-address breakpoint registers may be

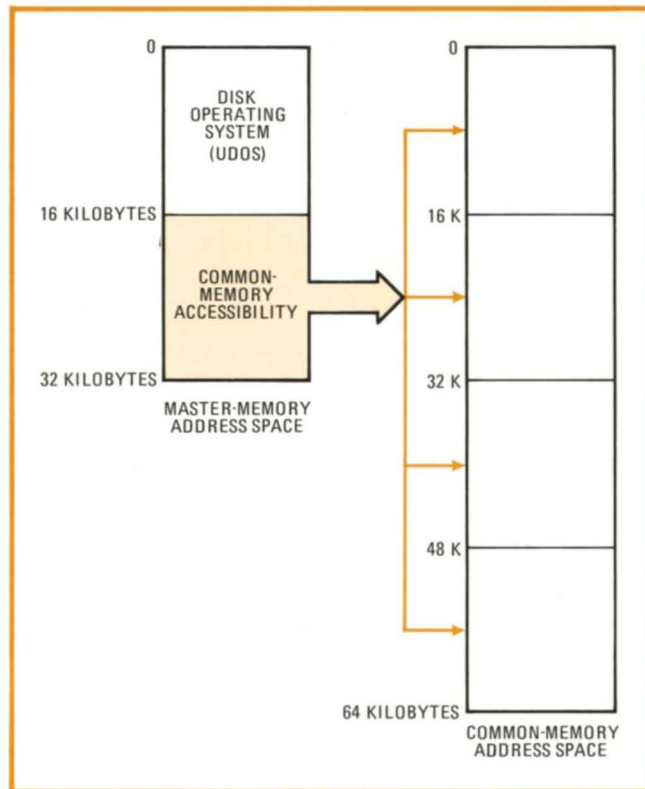

2. Memory addressing. The master CPU can address 32 kilobytes of memory. Of this total, 16 kilobytes are used by the disk-operating system, UDOS, while the other half can consist of any of four 16-kilobyte blocks in the common-memory addressing space.


set to break on any of a variety of memory-access conditions. Another capability is a dynamic trace of the user program. On an instruction-by-instruction basis, the user can trace the activity of the program being executed, with a display of the location of the instruction, its mnemonic, the register contents, and the state of the machine (such as the condition of the carry flip-flop).

Dynamic trace may be performed on every instruction, on instructions between two memory limits, or on only the jump instructions. The jump-instruction trace reduces print-out time and runs through the program faster. If the user isolates a problem area, he may go back to the full-trace mode and examine every one of the instructions.

I/O and interrupts

The functions associated with the master and slave CPUs dictate the need for separate master/slave input/output and interrupt structures. The master has a 256-port I/O address space and a 32-level interrupt structure. Sixteen interrupts are devoted to debug functions and service requests. The other 16 are related to the system I/O.

The master card contains the I/O ports to support such standard peripheral devices as the dual-drive floppy disk, a line printer, and a cathode-ray tube or teletypewriter console. With the addition of a standard general-purpose I/O card, the system-related functions are easily expanded to support other peripherals, such as high-

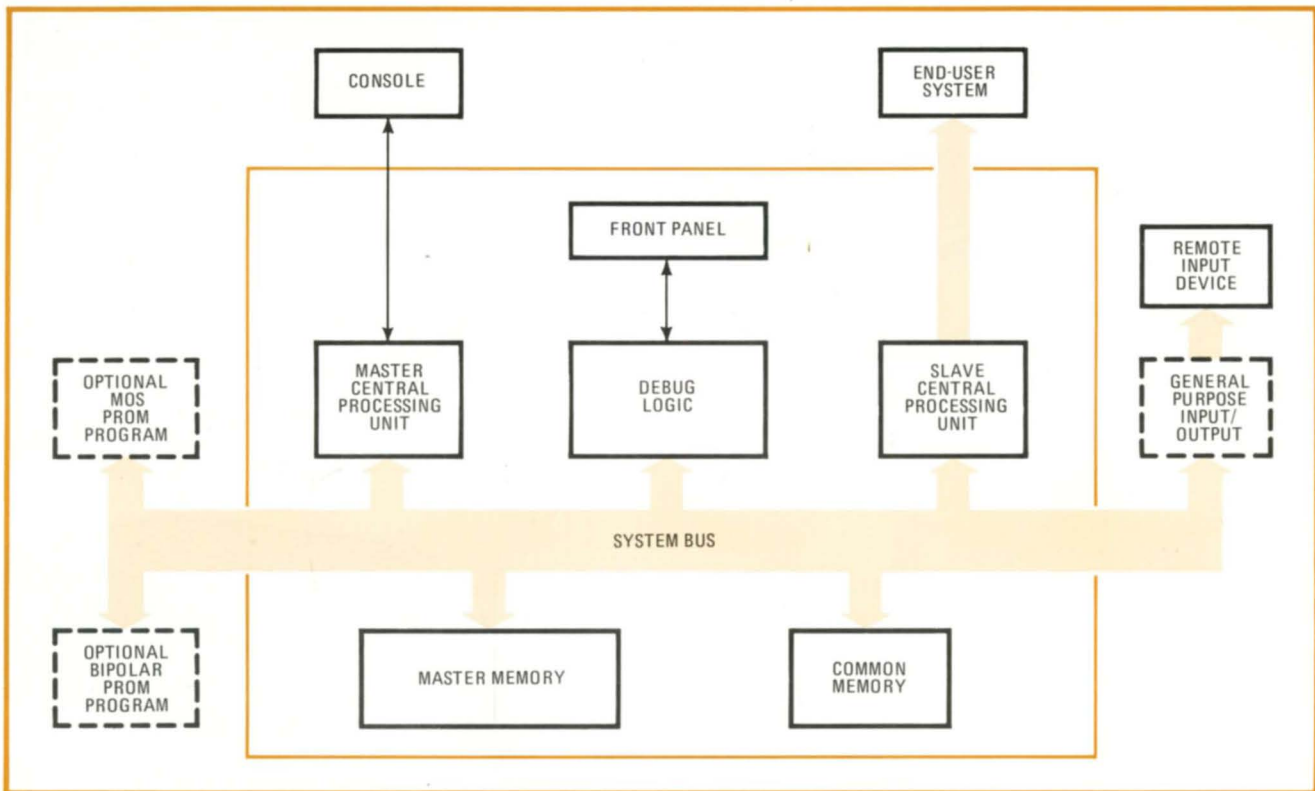

3. Smaller system. For applications in which users have already invested in software development aids, the Universal-One can be pared down to provide only emulation and PROM programming. Memory is much smaller, while the blocks shown in dashed lines are optional.

speed paper-tape or card readers.

The slave has a 256-port I/O address space and an eight-level priority-interrupt structure. It cannot directly address the system I/O. However, through the use of service requests to the master, it has full access to the system peripherals.

The user also has the option of using a general-purpose I/O card as interface between the slave and its special devices, such as the prototype's keyboard or printer. In such a case, the slave will perform its own I/O functions on those devices. The general-purpose card provides a full EIA-RS-232-compatible port and four 8-bit input/output ports.

Expandable PROM programming

Capability for programing erasable metal-oxide-semiconductor and bipolar-fusible PROMs for the final version of the prototype is integral to the development system. Two card slots in the motherboard and three front-panel sockets are provided with the standard system. Personality cards are available for programing the 1702A MOS PROM and the 82S115 4- and 8-bit bipolar family. New programing cards are easily substituted for other families of PROMs.

As well as eliminating the need for a separate PROM programmer, this feature is more cost-effective, since dual I/O circuitry is unnecessary and operation is controlled by the master CPU rather than by a separate processor. The programing cards are interrupt-driven, freeing the master for other tasks during the programing of each byte.

Even though a PROM verifies correctly, it may lose


charge or "grow back" a fusible link if not programed properly. Therefore, the cards have many protection and error-checking features such as over-voltage protection, current limiting to prevent overstressing, and power-failure protection against partial programing of the devices.

The universal emulator

Many companies already have some method of accomplishing the pure software-development function of assembling and editing programs, but they lack means of performing emulation or PROM programming for use in the prototype system. Other companies have a complete microprocessor development system, but they are involved in multi-project situations with one particular project fully occupying their development system. In either situation, companies may find a second version of the Millennium development system useful. With an expanded front panel and a paring-down of the system memory to 12 kilobytes, it becomes a universal emulator and PROM programmer (Fig. 3).



All of the software debug functions for both emulation modes previously discussed will be retained. The basic functions, such as patch, dump, examine, breakpoint, and others will be resident in the PROM. Only the trace program, which will change for each target slave, will be loaded into master memory from the console device. User programs may be entered into common memory either from the console device or remotely from a host computer via an EIA-RS-232 serial interface. Also, PROMs may be used to hold user programs that will be executed in the prototype. □

PRODUCT LINE

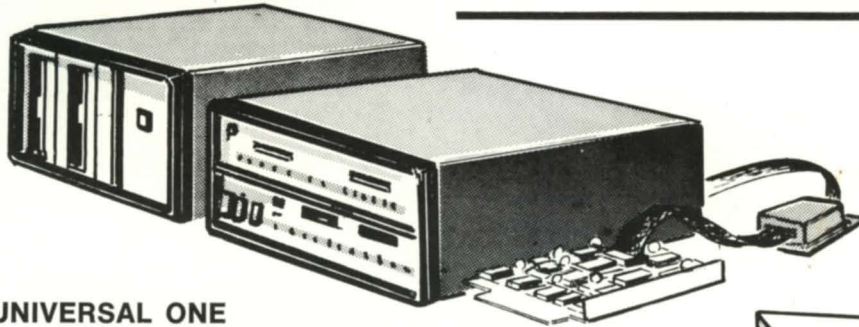


**UNIVERSAL ONE
DEVELOPMENT SYSTEM**



WITH MULTIPLE μ PROCESSOR SLAVES

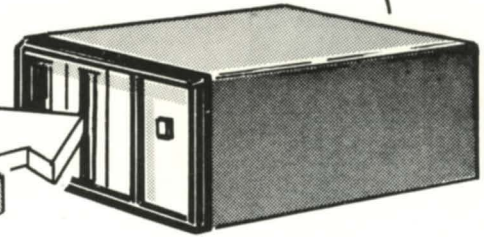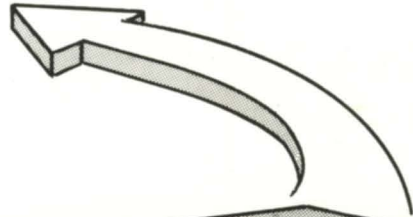


**DUAL
FLEXIBLE DISC**



MEMORY



**SYSTEM
SOFTWARE**

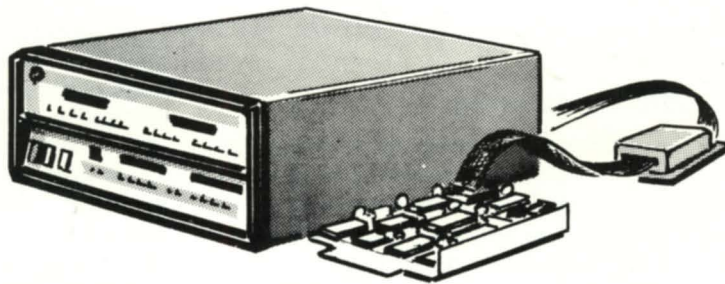

UNIVERSAL EMULATOR

*USE AS STAND ALONE OR ON-LINE
TO UNIVERSAL DEVELOPMENT SYSTEM.*



MILLENNIUM INFORMATION SYSTEMS, INC.

420 MATHEW STREET • SANTA CLARA, CA 95050 • 408 - 243-6652