


CABLE CONNECTORS FOR LEVELS AND PULSES

TYPES W021, W022, W028

W
SERIES

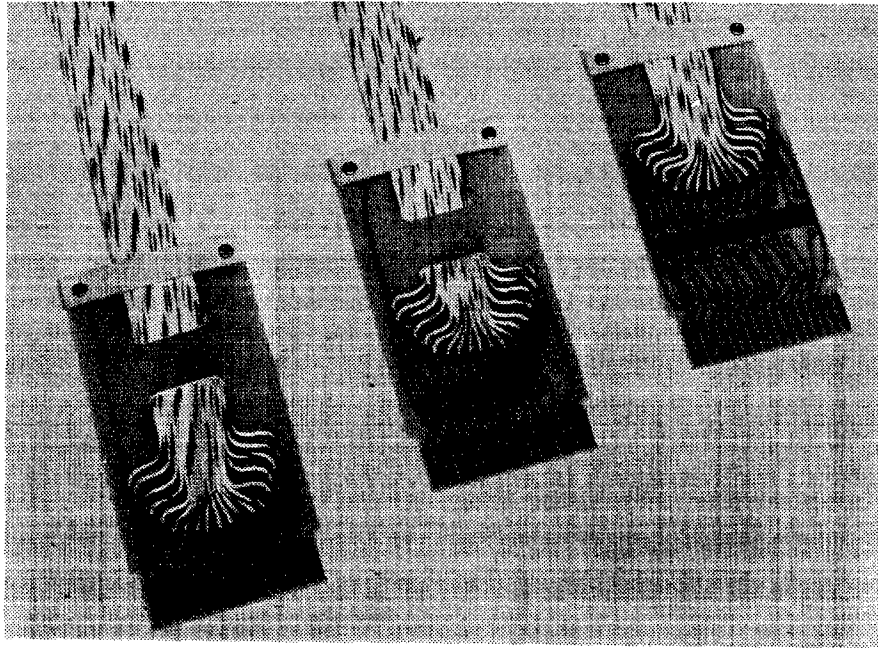


The W021, W022, and W028 provide cable connections to the FLIP CHIP mounting panel. The cable is a 19-conductor ribbon with nine signal leads and ten shields. The signal leads are connected to pins D, E, H, K, M, P, S, T and V. The shields are internally connected together and to pins C, F, J, L, N, R, and U.

In the W021, the signal leads are connected directly to the signal pins. In the W028, jumpers are available for series or shunt terminators. The Type W022 has a 100-ohm shunt terminator from each signal wire to the shield.

Connectors may be ordered in like or unlike pairs. They may also be ordered separately, in which case the other end of the cable is left free. Cable length may be specified in increments of 1 in.

ORDERING INFORMATION: To insure clear communication, use the format below.

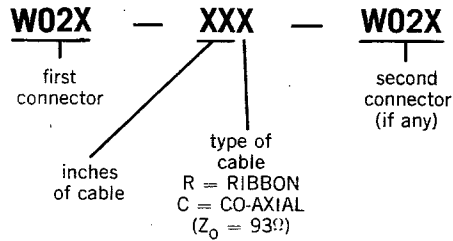

EXAMPLE: W028-24C two feet of co-axial cable attached, no second connector

Ribbon Cable Connectors				Coaxial Cable Connectors†			
Type	Cable Attached	Type	No Cable	Type	Cable Attached	Type	No Cable
W021R	\$13.00*	W021RU	\$4.00	W021C	\$31.00**	W021CU	\$ 4.50
W022R	\$13.50*	W022RU	\$4.50	W022C	\$33.00**	W022CU	\$6.50
W028R	\$13.00*	W028RU	\$4.00	W028C	\$31.00**	W028CU	\$4.50
*Ribbon Cable: Add \$.60/ foot.				**Coaxial Cable: Add \$1.50/foot.			