


LOGIC 1 SOURCE
M002

M
SERIES

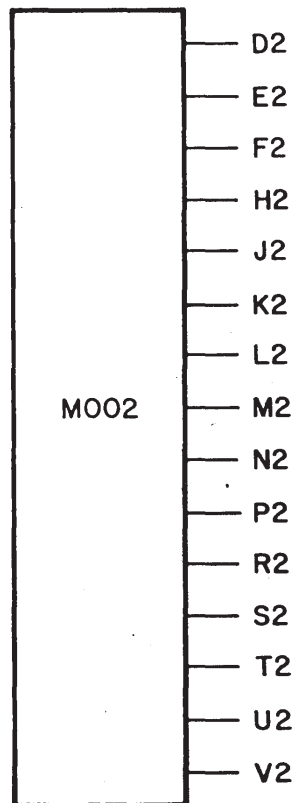

POWER

← A2 — +5V

← C2 — GRD

To hold unused M-Series TTL gate inputs high, the M002 provides 15 outputs at +3 volts (Logic 1), on pins D2 through V2. Up to 10 unused M-Series gate inputs may be connected to any one output. If a M002 circuit is driven by a gate, it appears as two TTL unit loads or 3.2 ma. at ground.

Power: +5 v at 16 ma. (max.)

M002 — \$10