THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY
COPYRIGHT 1970 BY DIGITAL EQUIPMENT CORPORATION

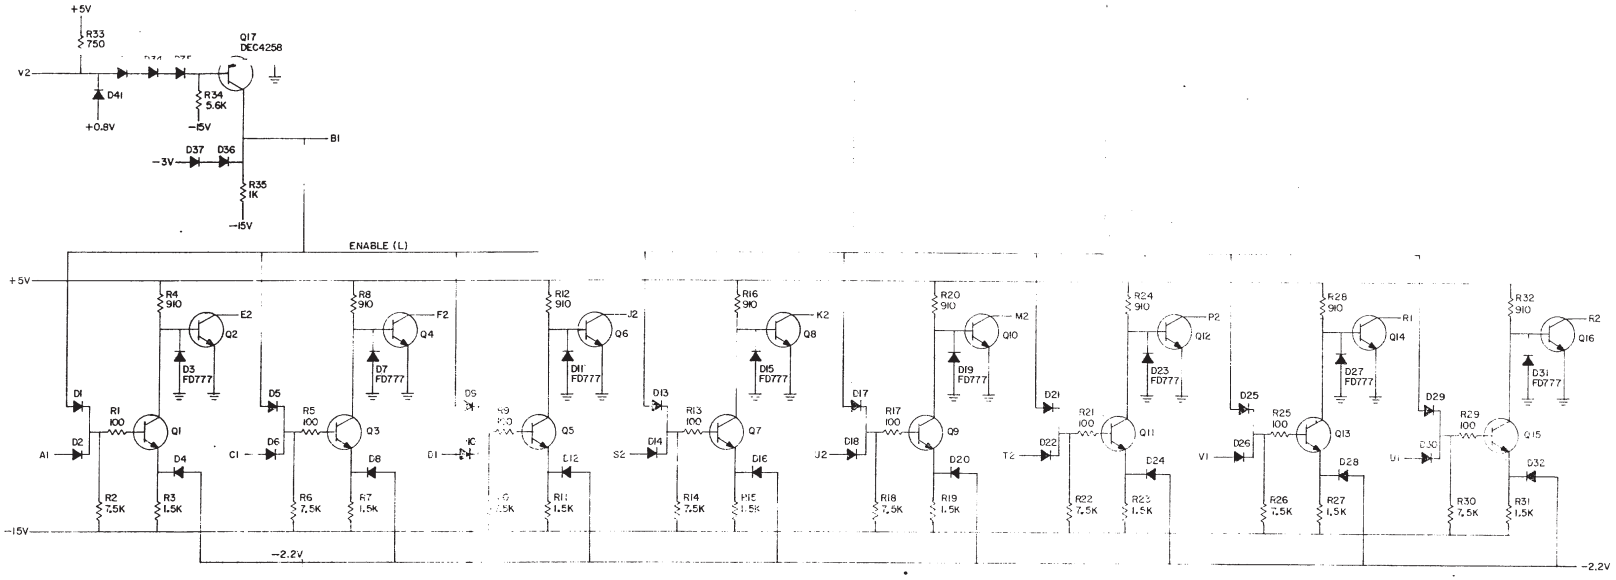

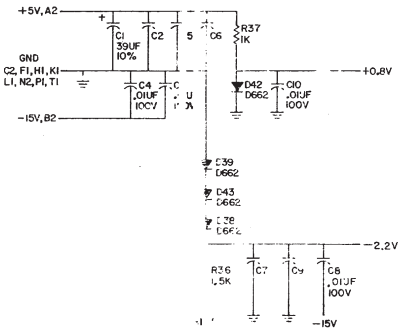

UNLESS OTHERWISE INDICATED:

CAPACITORS = .047UF, 16V, +15-20%
DIODES = D664
RESISTORS = 1/4W, 5%
TRANSISTORS = DEC4274

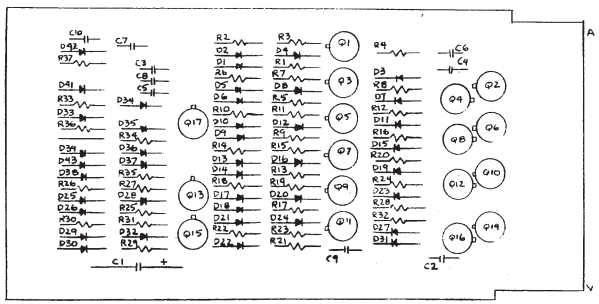

21	1305374	RES. 910 ¼W 5%	8	
20	1301874	RES. 5.6K ¼W 5%	1	
19	9008337-06	HANDLE, FLIP CHIP - MAGENTA	1	
18	9006732	EYELET # GS 4-7	2	
17	1505321	TRANSISTOR DEC 4258	1	
16	1505302	TRANSISTOR DEC 4274	16	
15	1301422	RES. 7.5K, ¼W, 5%	8	
14	1301401	RES. 750, ¼W, 5%	1	
13	1300391	RES. 1.5K, ¼W, 5%	9	
12	1300365	RES. 1K, ¼W, 5%	2	
11	1300229	RES. 100, ¼W, 5%		
10	1103041	DIODE FD777		
9	1100114	DIODE D664	30	
8	1100113	DIODE D662	4	
7	1009678	CAP. .047UF, 16V, 15-20%	5	
6	1001610	CAP. .01UF, 100V, 20% DISC	4	
5	1000076	CAP. 39UF, 10V, 10% S. TANT	1	
4	5009324	ETCHED CIRCUIT BOARD	1	
3	B-MK-M565-0-6	MODULE ECO HISTORY		
2	C-AK-M565-0-5	ASSY/DRILLING HOLE LAYOUT		
1	C-XC-M565-0-4	X-Y COORDINATE HOLE LOCATION		
ITEM NO.	PART NO.	DESCRIPTION	QTY.	
		PARTS LIST		

REVISIONS

CHG	CHG NO	REV
		C
Add 10002		D
Add 10003	6-4-70	D
P. SULLIVAN		

DRN	NANCY MOORE	DATE 2/9/70
CHK'D		DATE
ENG		DATE
PROD		DATE

TRANSISTOR & DIODE CONVERSION CHART

DEC	EIA	DEC	EIA
DEC4274	2N4274	D664	1N3605
D662	1N645	DEC4258	2N4258
FD777	SAME		

digital EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS

TITLE: MEMORY BUS RECEIVER M565

SIZE	CODE	NUMBER	REV
D	CS	M565	D

PRINTED CIRCUIT REV C

DEC FORM NO. 960 116