



NOTES:  
 1. DRAWING DEPICTS MC81-B  
 2. FOR MC81-A REMOVE  
 G228 IN LOCATION A37  
 3. SIGNAL NAMES INDICATE  
 ASSERTED STATES FOR HIGH (H)  
 LEVELS PER DEC STD 054

D-BS-MC81-0-2 Inhibit Drivers

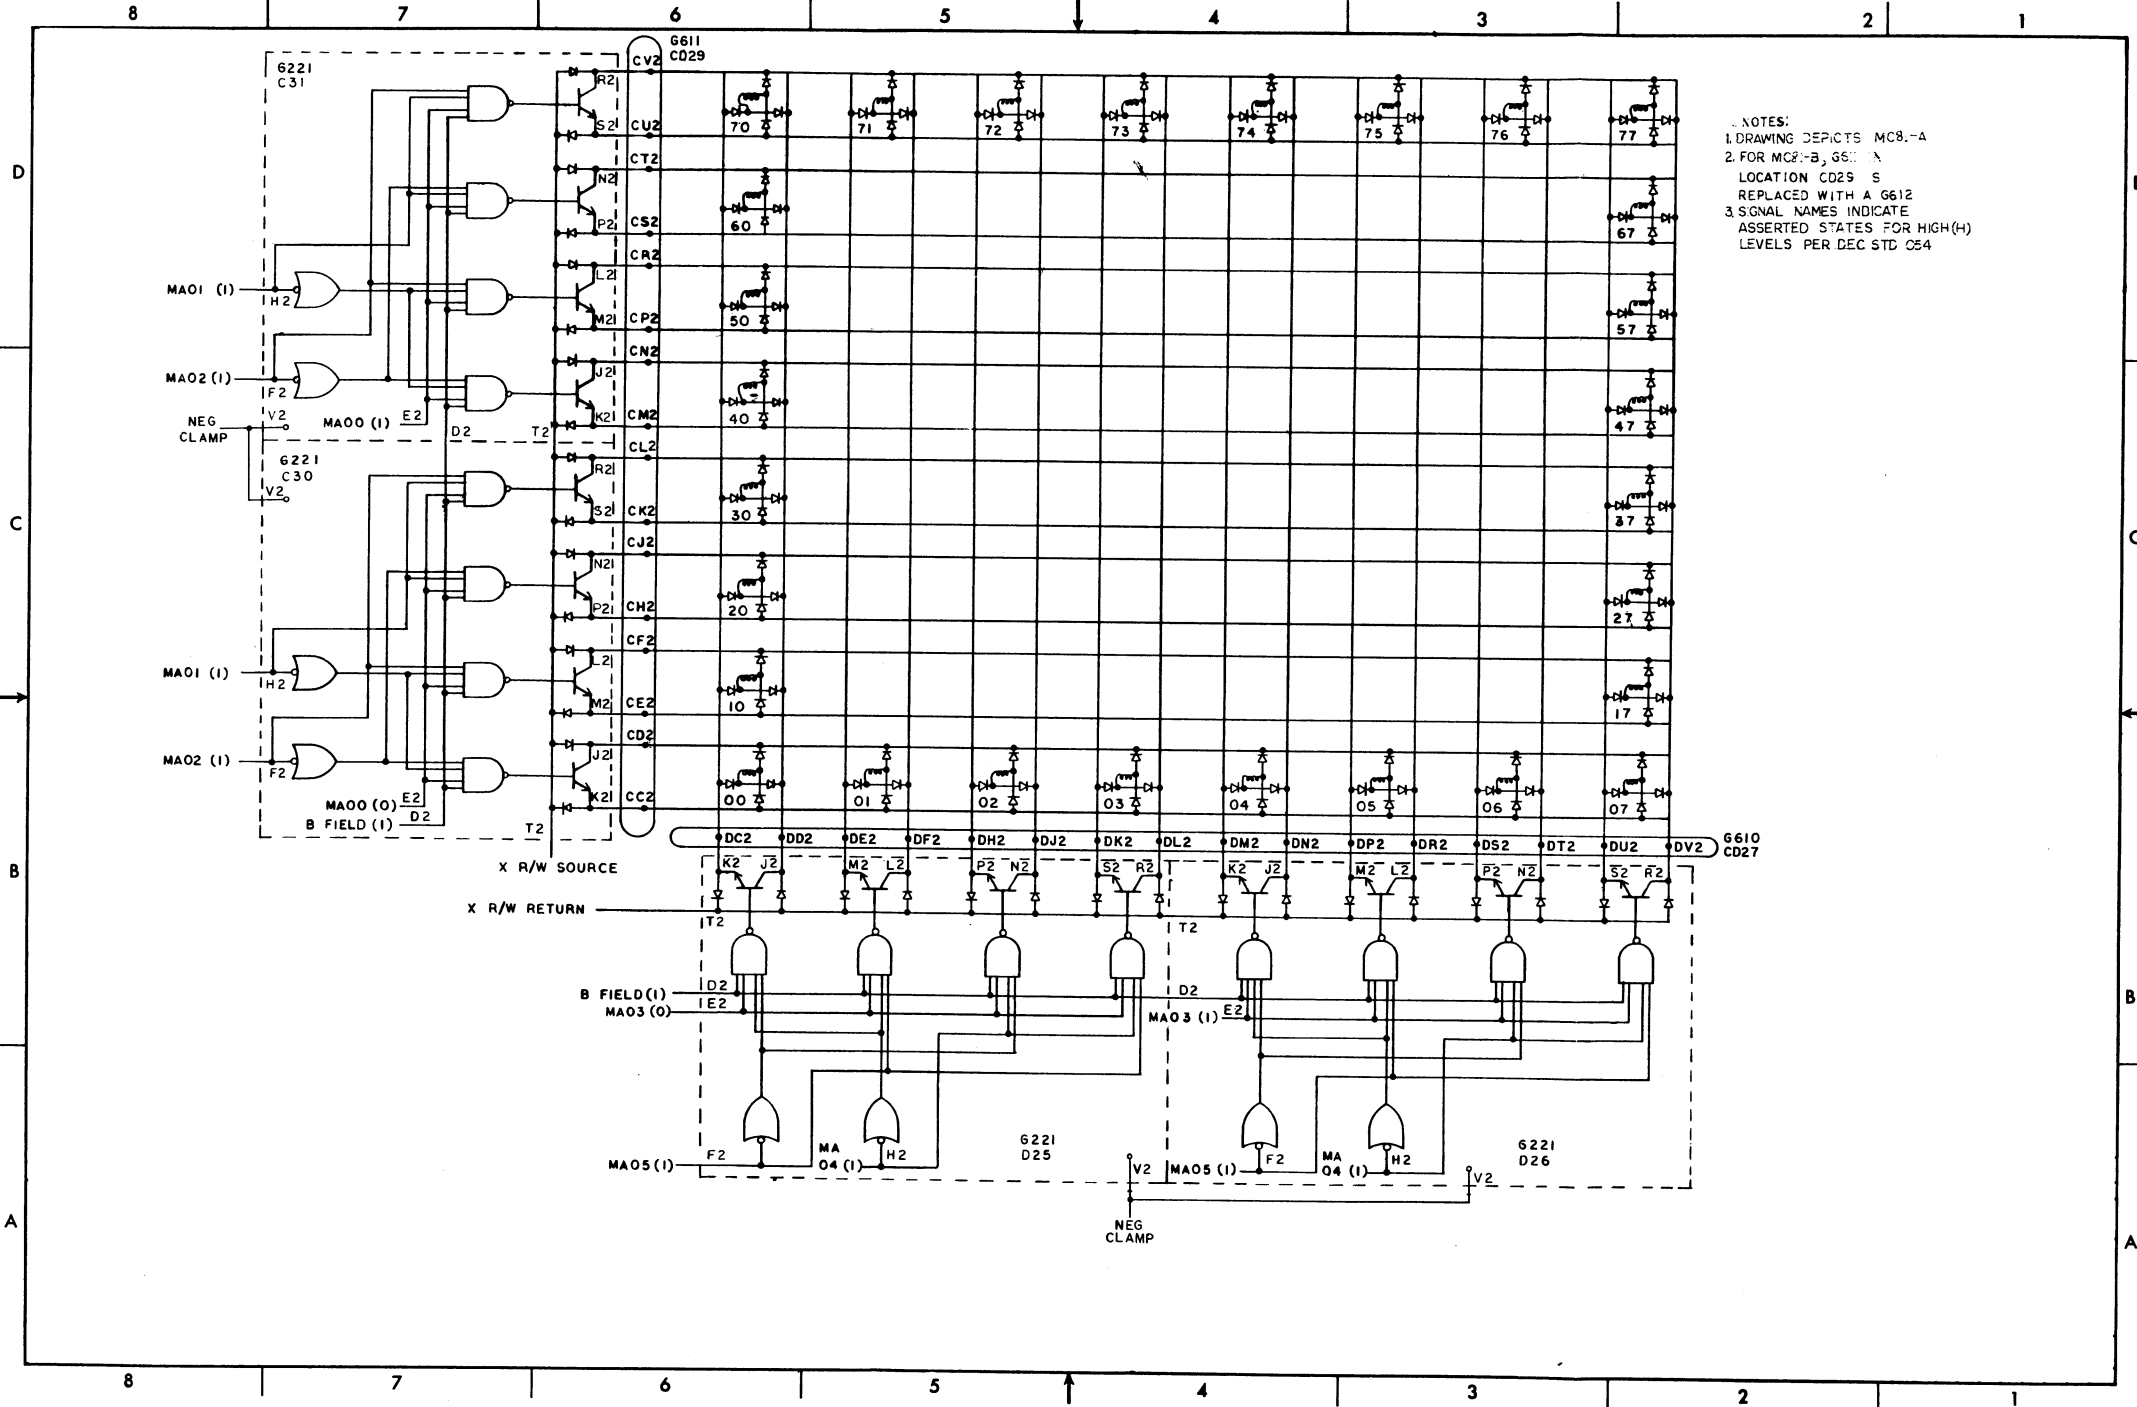

- NOTES:  
 1. DRAWING DEPICTS MC8-A  
 2. FOR MC8-B, G611 A  
 LOCATION CD29 S  
 REPLACED WITH A G612  
 3. SIGNAL NAMES INDICATE  
 ASSERTED STATES FOR HIGH(H)  
 LEVELS PER DEC STD 054

D-BS-MC8I-0-3 X Axis Selection

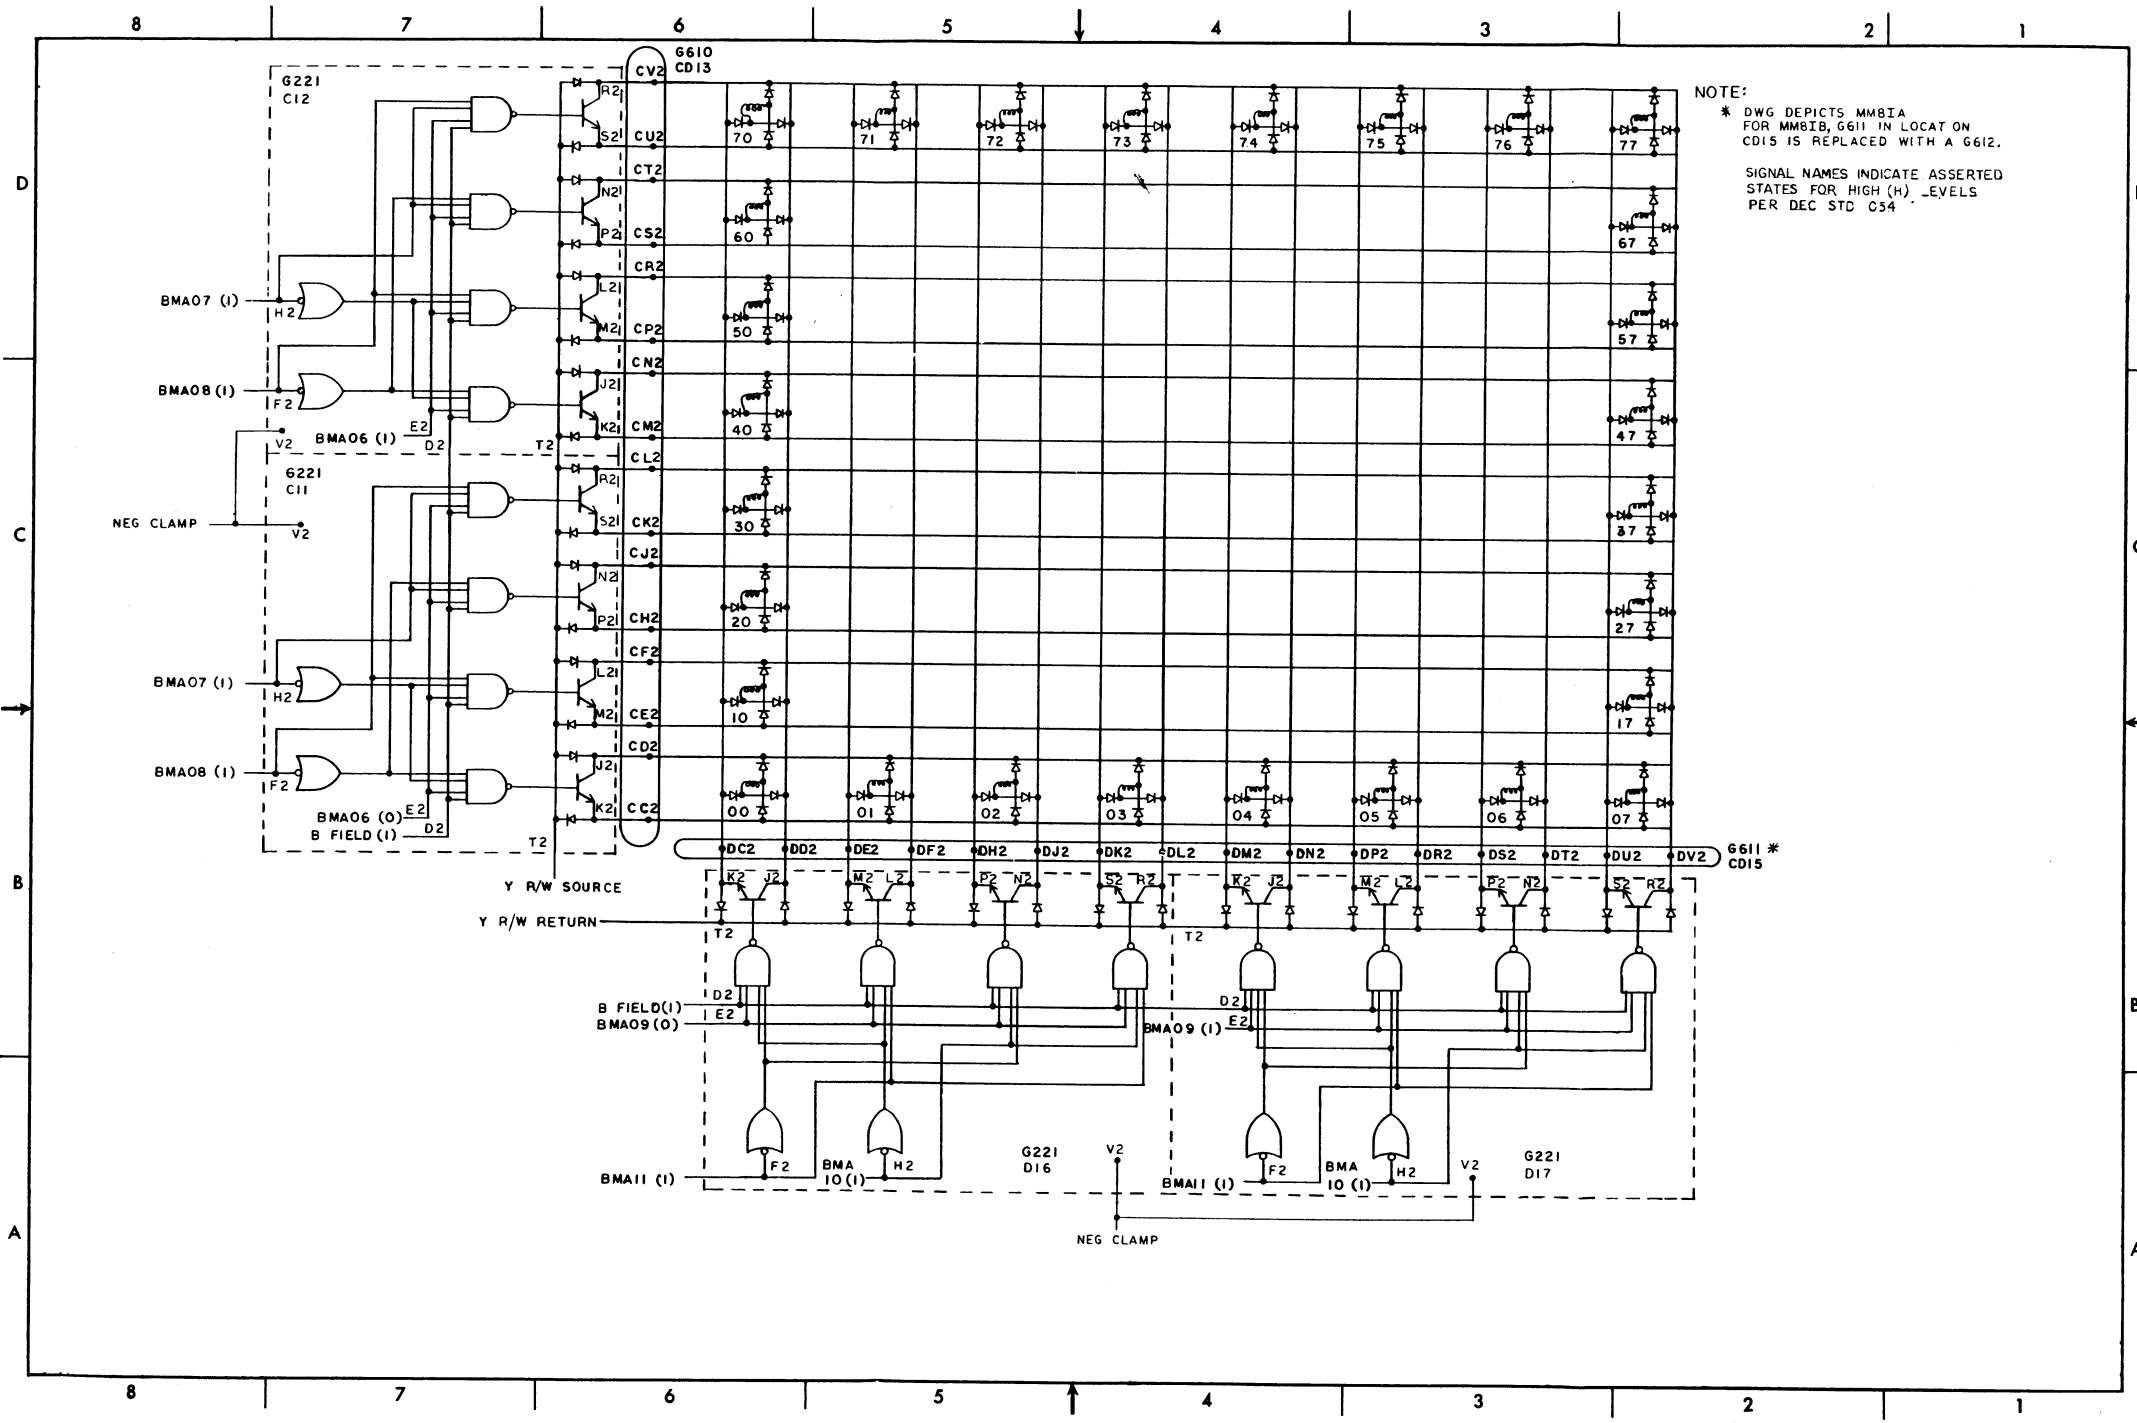

NOTE:  
 \* DWG DEPICTS MM81A FOR MM81B, G611 IN LOCAT ON CD15 IS REPLACED WITH A G612.  
 SIGNAL NAMES INDICATE ASSERTED STATES FOR HIGH (H), \_LEVELS PER DEC STD 034