


DIMENSIONS: mm (In)

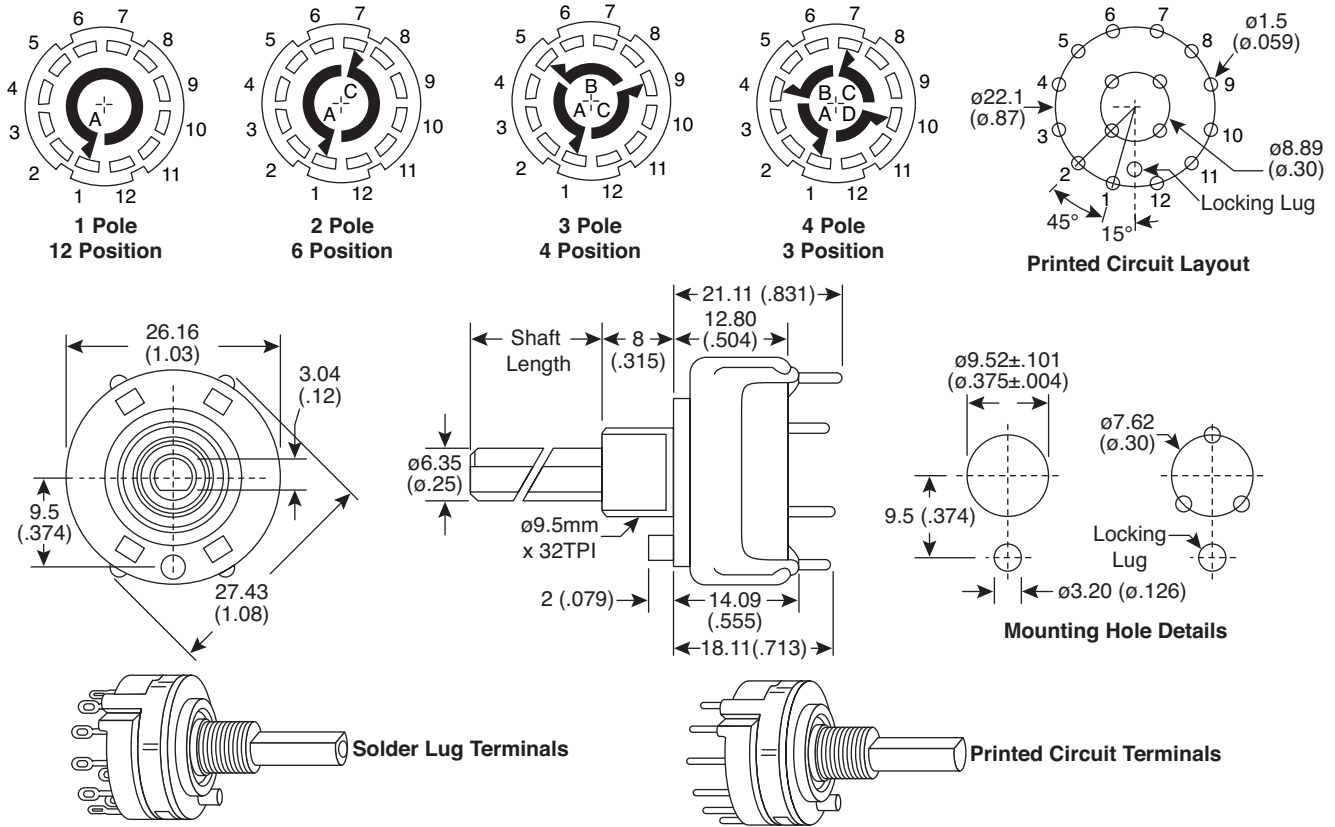

Electrical Specifications:

- Working voltage: 250VAC or 250VDC max.
- Dielectric strength: 1,000VAC @ 25°C
- Current capacity: 5A continuous
- Contact rating: 150mA/250VAC/DC DC
- Contact resistance: 50mΩ max.

Mechanical Specifications:

- Index angle: 30°
- Contact life: over 10,000 operations
- Operating torque: 7.6Ncm min., 9.6Ncm max.
- End stop torque: 1.13Nm max.
- Use tang washer provided to adjust number of positions

Materials:

- Molding: glass filled nylon
- Contacts: .0001" silver plating, fully enclosed
- Shaft: 66 36/33% glass filled nylon, can be cut to any length

Lorlin Part No.				Poles	Maximum Positions	Shaft Length in Inches
Solder Terminals		P.C. Terminals				
Shorting	Non-shorting	Shorting	Non-shorting			
CK1034	CK1024	CK1054	CK1044	1	12	1 3/16
CK1035	CK1025	CK1055	CK1045	2	6	1 3/16
...	CK1026	CK1056	CK1046	3	4	1 3/16
...	CK1027	CK1057	CK1047	4	3	1 3/16
CK1454	CK1450	...	CK2376	1	12	1/2
CK1455	CK1451	...	CK2377	2	6	1/2
CK1456	CK1452	...	CK2378	3	4	1/2
CK1457	CK1453	...	CK2379	4	3	1/2
CK2393	CK2425	...	CK2372	1	12	3/8
CK2441	CK2394	...	CK2373	2	6	3/8
CK2818	CK2395	...	CK2374	3	4	3/8
...	CK2396	...	CK2375	4	3	3/8

Rotary Switches

CK - Series