



pdp8/e

pdp8/f & pdp8/m

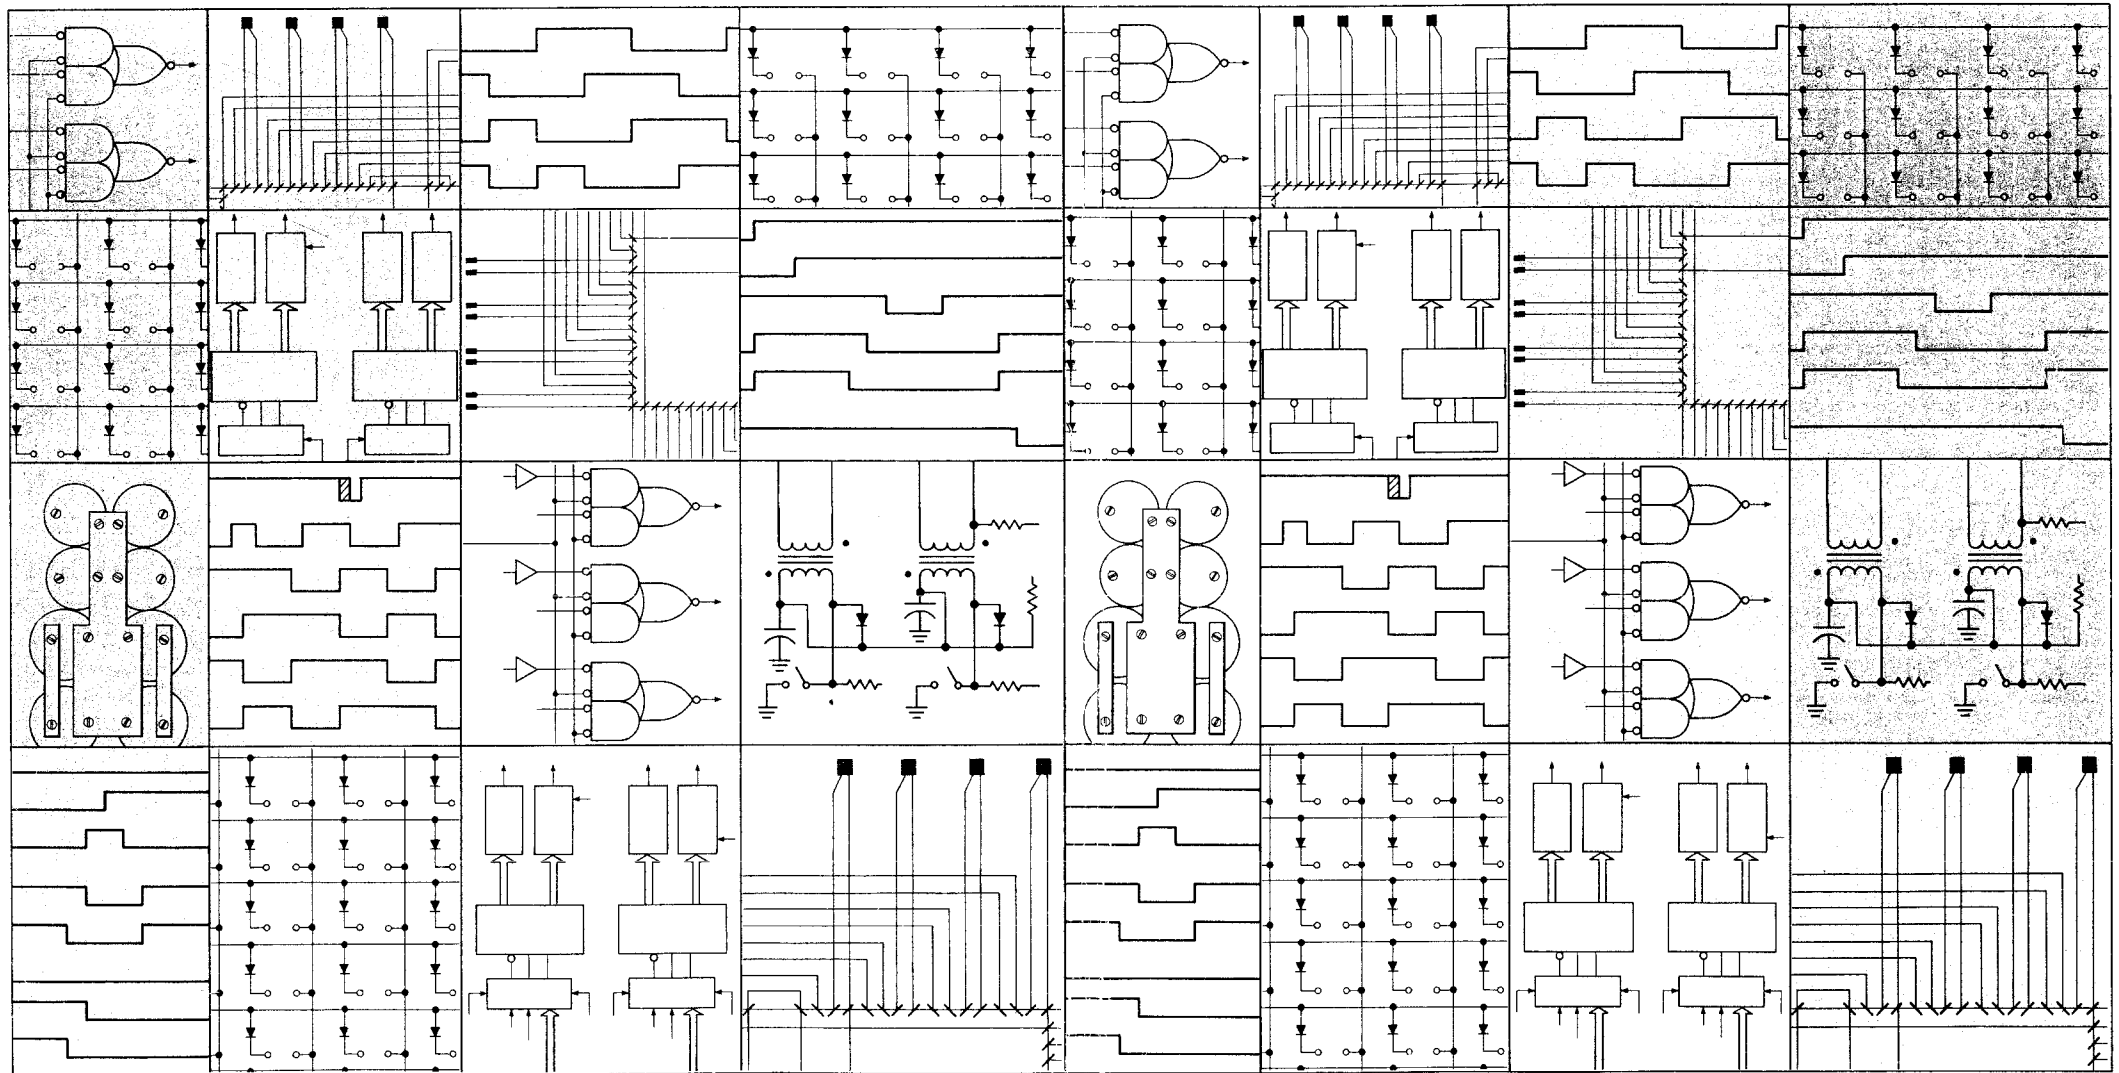

**RK8-E disk
cartridge control
engineering drawings**

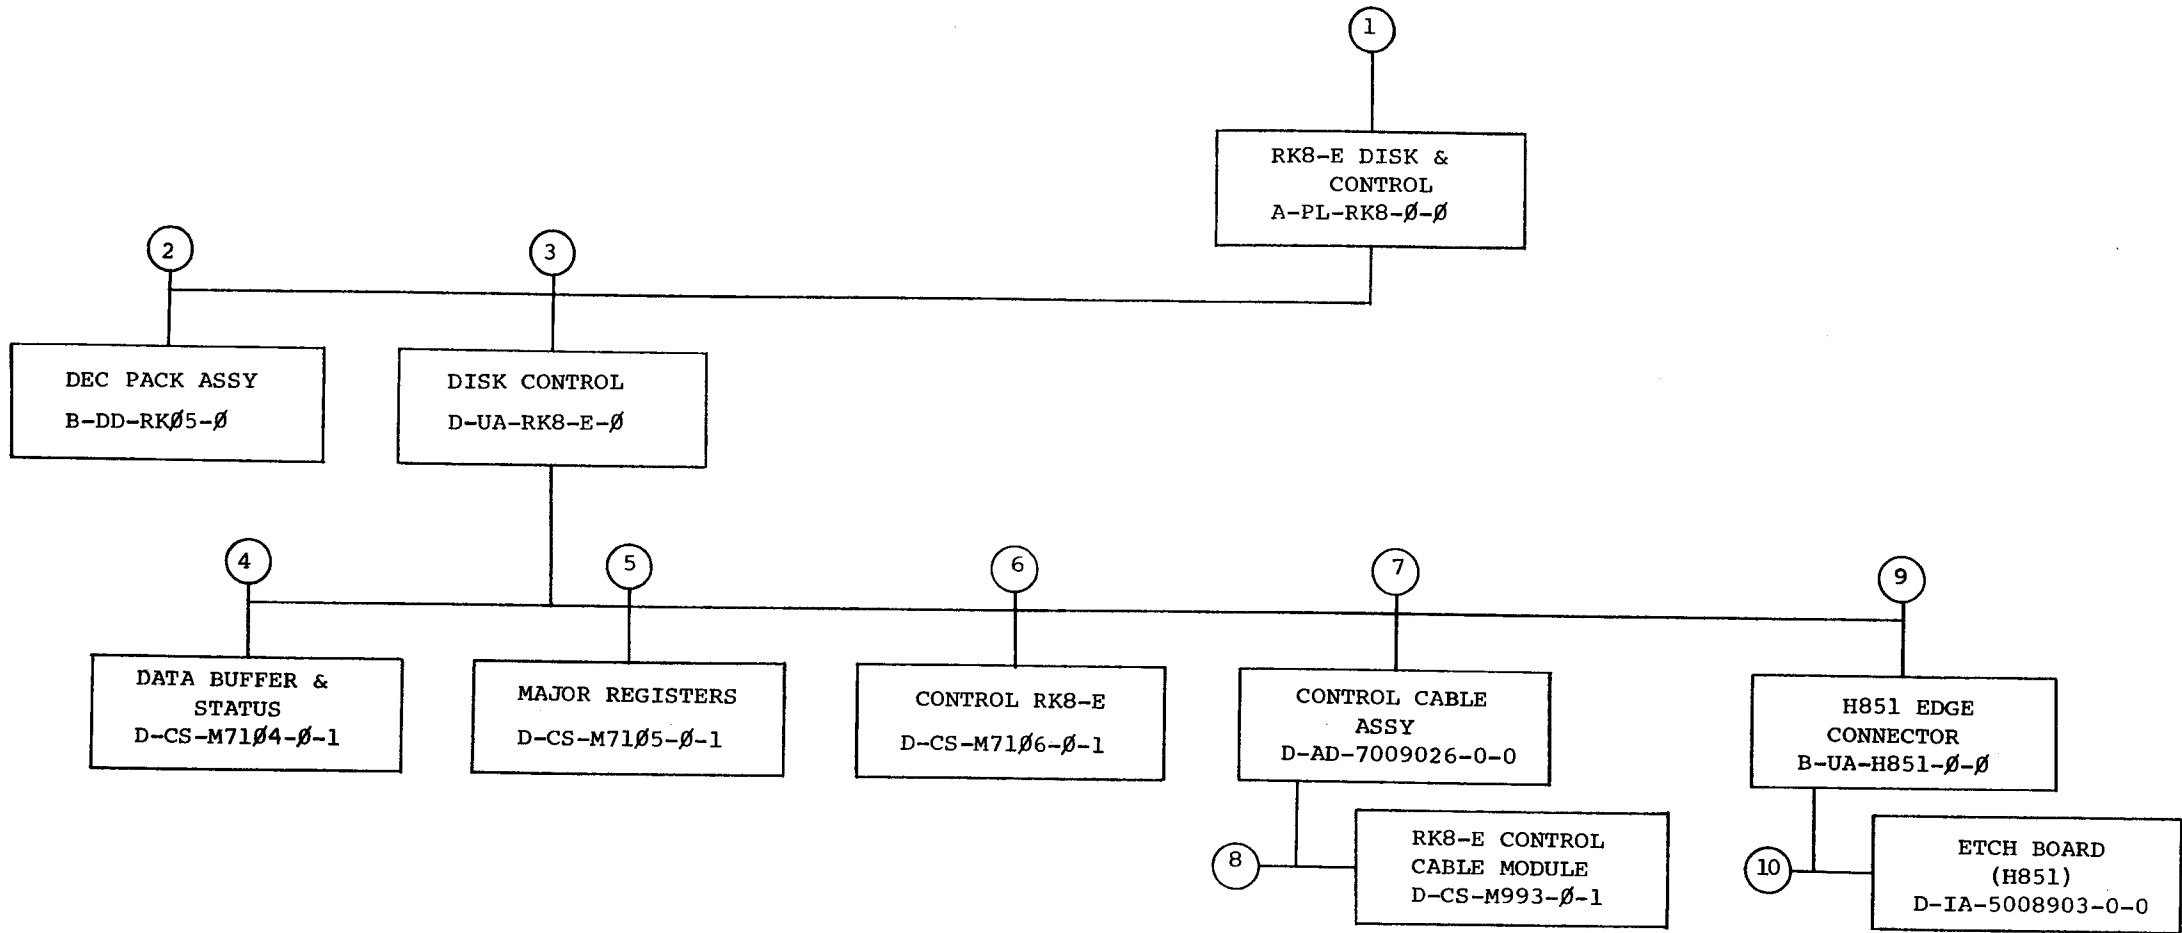

TITLE	SHEET	SIZE	CODE	NUMBER	REV
RK8-E DISK & CONTROL	2 OF 3	B	DD	RK8-Ø	

CUSTOMER PRINT SET		MECHANICAL/ELECTRICAL					CUSTOMER PRINT SET		MECHANICAL/ELECTRICAL						
	MFG. SET	FIND NO.	DRAWING NO.	REV	NO OF SHT	DESCRIPTION	OPTION NO./FILE DATE		MFG. SET	FIND NO.	DRAWING NO.	REV	NO OF SHT	DESCRIPTION	OPTION NO./FILE DATE
x		1	A-PL-RK8- β - β		1	RK8-E DISK & CONTROL		x		7	D-AD-7009026-0-0		2	CONTROL CABLE ASSY,	
X		2	B-DD-RK \emptyset 5- β	B	5	DEC PACK ASSY		x		8	D-CS-M993- β -1	*	2	RK8-E CONTROL CABLE MODULE	
											K-CO-M993- β -4		1	X-Y COORDINATE HOLE LOCATION	
											D-AH-M993- β -5		1	ASSY/DRILLING HOLE LAYOUT	
											B-MH-M993- β -6		1	MODULE ECO HISTORY	
x		3	D-UA-RK8-E- β		1	DISK CONTROL		x		9	B-UA-H851- β - β	A	1	H851 EDGE CONNECTOR	
x			D-FD-RK8-E-1		4	FLOW DIAGRAM RK8-E					A-PL-H851- β - β	A	1	H851 EDGE CONNECTOR	
x			D-TD-RK8-E-2		1	MAJOR STATES & TIMING FLOW					B-CS-H851- β -1	A		EDGE CONNECTOR H851	
x			A-AL-RK8-E-3		1	ACCESSORY SHIPPING LIST					C-AH-H851- β -5	A	1	ASSY/DRILLING HOLE LAYOUT	
			A-SP-RK8-E-4		3	MODULE TEST & ACCEPTANCE FOR RK8-E					B-MH-H851- β -6		1	MODULE ECO HISTORY	
			A-SP-RK8-E-5		39	RK8E DISK CONTROL									
x			A-SP-RK8-E-6		5	FIELD INSTALL & ACCEPT. PROC.									
			A-SP-RK8-E-7		5	IN-HOUSE ACCEPT. PROC.									
x		4	D-CS-M71 \emptyset 4- β -1	A	7	DATA BUFFER & STATUS				10	D-IA-5008903-0-0	A	1	ETCH BOARD (H851)	
			K-CO-M71 \emptyset 4- β -4		1	X-Y COORDINATE HOLE LOCATION					C-AH-5008903-0-5		1	ASSY/DRILLING HOLE LOCATION	
			D-AH-M71 \emptyset 4- β -5		1	ASSY/DRILLING HOLE LAYOUT									
			B-MH-M71 \emptyset 4- β -6		1	MODULE ECO HISTORY									
x		5	D-CS-M71 \emptyset 5- β -1	A	5	MAJOR REGISTERS									
			K-CO-M71 \emptyset 5- β -4		1	X-Y COORDINATE HOLE LOCATION									
			D-AH-M71 \emptyset 5- β -5		1	ASSY DRILLING HOLE LAYOUT									
			B-MH-M71 \emptyset 5- β -6		1	MODULE ECO HISTORY									
x		6	D-CS-M71 \emptyset 6- β -1	A	6	CONTROL RK8-E									
			K-CO-M71 \emptyset 6- β -4		1	X-Y COORDINATE HOLE LOCATION									
			D-AH-M71 \emptyset 6- β -5		1	ASSY/DRILLING HOLE LAYOUT									
			B-MH-M71 \emptyset 6- β -6		1	MODULE ECO HISTORY									

CUSTOMER PRINT SET CODES
X = PRINT OF DOCUMENT INCLUDED IN PRINT SET
C = INCLUDES ALL PRINTS INDICATED ON DOCUMENT
S = CONFIDENTIAL AUTHORIZED SIGNATURE REQUIRED

TITLE
RK8-E DISK & CONTROL
SHEET 3 OF 3
SIZE CODE B DD
NUMBER RK8- \emptyset
REV

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

DIGITAL EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

DATE 10-12-72

TITLE RK8E FIELD INSTALLATION AND ACCEPTANCE PROCEDURE

REVISIONS

REV	DESCRIPTION	CHG NO	ORIG	DATE	APPD BY	DATE

ENG	<i>[Signature]</i>	10-12-72	APPD	<i>[Signature]</i>	SIZE	CODE	NUMBER	REV
					A	SP	RK8-E-6	

DEC FORM NO. DRA 107A

SHEET 1 OF 5

ENGINEERING SPECIFICATION

079001

CONTINUATION SHEET

TITLE RK8E FIELD INSTALLATION AND ACCEPTANCE PROCEDURE

- 1.0 SHIPPING HARDWARE
 - 1.1 RK8E Control
 - 1.1.1 M7104
 - 1.1.2 M7105
 - 1.1.3 M7106
 - 1.2 RK05 Disk Drive (Maximum of 4 drives per control)
 - 1.2.1 95 to 130VAC @ 60 ± 0.5 Hz - RK05-AA
 - 1.2.2 190 to 260VAC @ 60 ± 0.5 Hz - RK05-AB
 - 1.2.3 95 to 130 VAC @ 50 ± 0.5 Hz - RK05-BA
 - 1.2.4 190 to 260 VAC @ 50 ± 0.5 Hz - RK05-BB
 - 1.3 Interface Cables and Terminator
 - 1.3.1 Interface cable between RK8E control and RK05 - 7009026
 - 1.3.2 Interface cable from one RK05 to another. BC11A
 - 1.3.3 Terminator Module (last RK05)
 - 1.4 (1) Disk Cartridge, ^{M930} HD16 Sector, 30-10350-02.
- 2.0 SHIPPING SOFTWARE
 - 2.1 RK8E Diskless Control Test
 - Maindec-08-DHRKA-A-PB
 - Maindec-08-DHRKA-A-D
 - 2.2 RK8E Drive Control Test
 - Maindec-08-DHRKB-A-PB
 - Maindec-08-DHRKB-A-D
 - 2.3 RK8E Formatter Program
 - Maindec-08-DHRKD-A-PB
 - Maindec-08-DHRKD-A-D
 - 2.4 RK8E Data Reliability Program
 - Maindec-08-DHRKC-A-PB
 - Maindec-08-DHRKC-A-D

DEC FORM NO 16-1022 DRA 108

SIZE	CODE	NUMBER	REV
A	SP	RK8-E-6	

SHEET 2 OF 5

TITLE RK8E FIELD INSTALLATION AND ACCEPTANCE PROCEDURE

3.0 UNPACKING AND INSTALLATION

- 3.1 Unpack and inspect RK05 using the procedure in the RK05 Disk Drive Maintenance Manual, Chapter 2.
- 3.2 Using the Shipping Hardware and Software lists, verify that all items are present.
- 3.3 Insure power on the PDP-8E, 8M, 8F is turned off.
- 3.4 Check the M7104 to insure that the device code jumpers are in the correct configuration (normally 674X), refer to Table 1.

NOTE: The diagnostic programs normally recongnizes Program Device Code 674X. If it desired to operate with a different code, refer to the Diagnostic Document's Section headed "Change Program Device Codes".

TABLE 1

<u>Octal Code</u>	<u>Jumpers Installed</u>
674X	W2 W4 W6
675X	W2 W3 W4
676X	W1 W2 W6
677X	W1 W2 W3

- 3.5 Check M7105 module to insure that the priority jumpers are in the correct configuration, refer to Table 2.

SIZE	CODE	NUMBER	REV
A	SP	RK8-E-6	

SHEET 3 OF 5

TITLE RK8E FIELD INSTALLATION AND ACCEPTANCE PROCEDURE

3.0 UNPACKING AND INSTALLATION (continued)

TABLE 2

<u>Break Priority</u>	<u>Jumpers Installed</u>
∅	W1 W4
1*	W2 W3 W5

*Normally shipped with priority 1 jumpers installed.

- 3.6 Connect the 7009026 cable to the Berg connector on the M7106 module.
- 3.7 Insert the RK8E modules into the Omnibus (refer to UA-RK8-E-∅). Refer to Table 2-3 in Volume I of the PDP-8E Maintenance Manual for installation priorities.
- 3.8 Install H851 top connectors between the modules (refer to UA-RK8-E-∅).
- 3.9 Following the procedure in the RK05 Maintenance Manual, Chapter 2, install the RK05.

4.0 ACCEPTANCE

- 4.1 Requirements for Acceptance
- ASR33 teletype, or equivalent.
 - Programmers console.
 - At least 4K of Read/Write Memory.
- 4.2 Run, in order, the programs listed in the "Shipping Software", using the loading and operating procedures in each program's document. If any errors occur, refer to the errors section of the document to evaluate the printout, and Chapter 5 of the RK8E Maintenance Manual for aids in determining the problem.

SIZE	CODE	NUMBER	REV
A	SP	RK8-E-6	

SHEET 4 OF 5



TITLE RK8E FIELD INSTALLATION AND ACCEPTANCE PROCEDURE

- 4.0 ACCEPTANCE (continued)
- 4.3 Each program should be run the following amount of passes.
- A. Diskless Control Test - Two Passes
 - B. Drive Control Test - Two Passes
 - C. Formatter Program - One Pass
 - D. Data Reliability Program - One Pass
- 4.4 Acceptable Errors
- A. One read error during the Acceptance Procedure

SIZE	CODE	NUMBER	REV
A	SP	RK8-E-6	

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

43V 1-1-EX-100 2

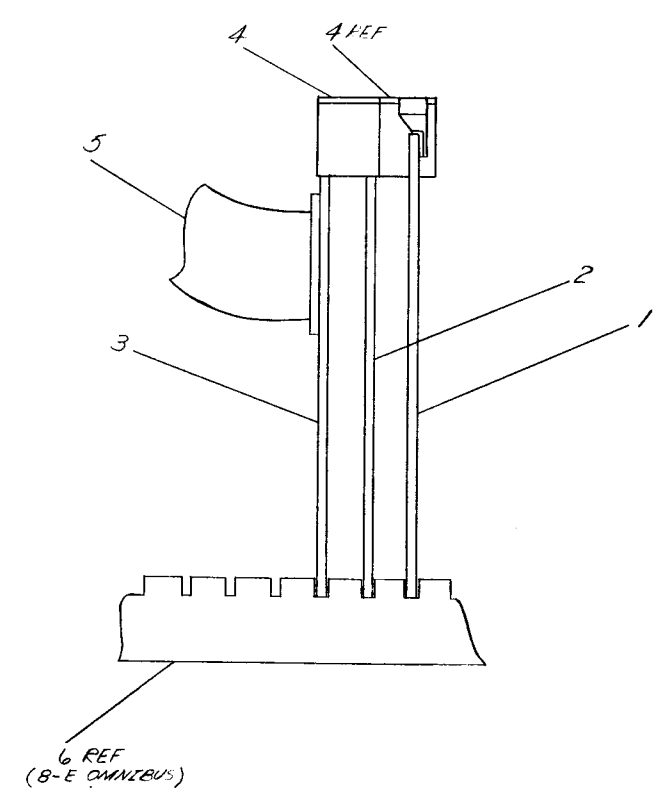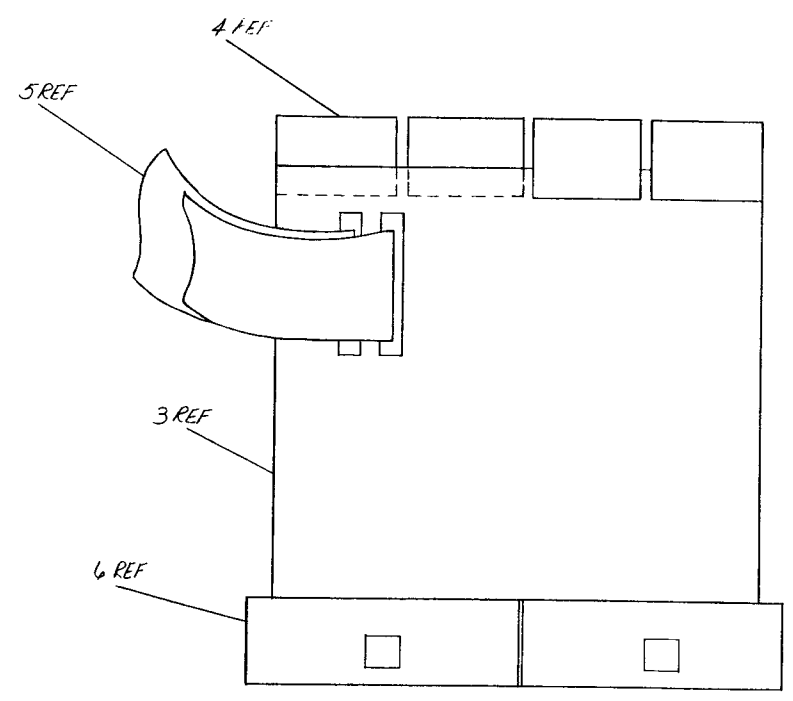

QTY.	DESCRIPTION	PART NO.	ITEM NO.
1	W993 TO BERG	D-AD-707926-000	5
4	EDGE CONNECTOR	B-UP-H151-B-0	4
1	CONTROL, RKB-E	D-CS-M7106-01	3
1	MARK REGISTERS	D-CS-M7105-0-1	2
1	DATA BUFFER STATUS	D-CS-M7104-01	1



FIRST USED ON OPTION/MODEL		QTY.		DESCRIPTION		PART NO.		ITEM NO.	
RKB-E									
PARTS LIST									
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES		DRN	DATE	 digital EQUIPMENT CORPORATION <small>MAINTON MASSACHUSETTS</small>					
TOLERANCES		CHK'D.	DATE						
DECIMALS	ANGLES	ENG.	DATE						
XXX + .005	±0° 30'	PROJ. ENG.	DATE						
XX + .02		PROD.	DATE	DISK CONTROL					
X + .1									
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓									
MATERIAL		NEXT HIGHER ASSY.							
FINISH		B-DI-RKS-0		SIZE CODE	NUMBER	REV			
		SCALE		DUA RKB-E-0					
		SHEET		1 OF					

REVISIONS
 CHANGE NO. REV.
 CHK.

REV. NUMBER
 DUA RKB-E-0

DEC FORM NO. DRG 100-A

This drawing and specifications herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

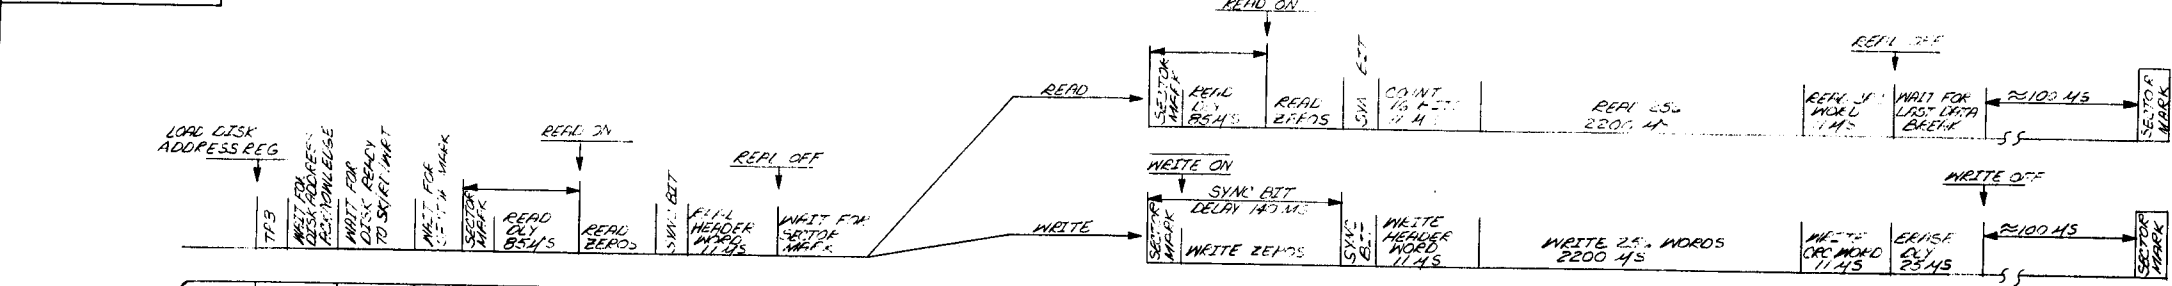

IF "SEEK ONLY" GO TO IDLE AND SET DONE FLAG.
IF NOT A HEADER CHECK, GO TO SECTOR SEEK STATE.

MAJOR STATE	FUNCTION	SEEK	SK/CHK/RO	SK/CHK/WRT	SK/RO	SK/WRT
IDLE	CONTROL IS NOT BUSY. WHEN THE GO COMMAND (DAS) IS ISSUED THE C (AC) IS LOADED INTO THE CRC* AND SECTOR-SURFACE REGISTERS (DISK ADDRESS)	✓	✓	✓	✓	✓
STROBE	STROBE THE CYLINDER ADDRESS FROM THE C REGISTER TO THE DRIVE AND WAIT FOR THE DRIVE'S "ADDRESS ACKNOWLEDGE" SIGNAL.	✓	✓	✓	✓	✓
DRIVE SEEKING	WAIT FOR THE "DISK READY TO SEEK/READ/WRITE" LEVEL FROM THE DRIVE TO SIGNIFY THAT THE HEADS ARE POSITIONED OVER THE CYLINDER ADDRESS.		✓	✓	✓	✓
HEADER A	WAIT FOR THE FIRST SECTOR MARK, THEN START THE READ DELAY.		✓	✓		
HEADER B	AT THE END OF THE READ DELAY TURN THE READ FLOP ON. ZEROS WILL BE READ UNTIL THE SYNC BIT WHICH SIGNIFYS THE BEGINNING OF A SECTOR'S DATA.		✓	✓		
HEADER C	READ THE 16 BIT HEADER WORD AND COMPARE IT WITH THE CYLINDER ADDRESS IN THE CRC REGISTER.		✓	✓		
SECTOR SEEK	IF THE HEADER WORD DOES NOT EQUAL THE CYLINDER ADDRESS SET THE "CYLINDER ADDRESS ERROR" AND GO TO THE IDLE STATE. AT EACH SECTOR MARK COMPARE THE SECTOR ADDRESS WITH THE DISK SECTOR ADDRESS LINES, IF EQUAL GO TO THE NEXT STATE.		✓	✓	✓	✓
HEADER D	AT THE BEGINNING OF THE SECTOR START THE "READ DELAY". AT THE END OF THE "READ DELAY" SET "READ." ZEROS WILL BE READ UNTIL THE SYNC BIT.		✓		✓	

MAJOR STATE	FUNCTION	SEEK	SK/CHK/RO	SK/CHK/WRT	SK/RO	SK/WRT
HEADER E	COUNT AND IGNORE THE FIRST 16 BITS. WRITE THE HEADER WORD SPECIFIED BY THE CRC REGISTER.		✓		✓	✓
DATA STATE	READ 25L-12 BIT WORDS FROM THE DISK INTO THE DATA BUFFER AND COMPUTE THE CRC. TRANSFER 12 BIT WORD FROM DATA BUFFER TO THE PROCESSOR. THE CONTROL WILL TRY TO KEEP DATA BUFFER EMPTY VIA DATA BREAKS. WRITE ON THE DISK 25L-12 BIT WORDS TRANSFERED FROM THE PROCESSOR TO THE DATA BUFFER, TRYING TO KEEP DATA BUFFER FULL VIA DATA BREAKS. COMPUTE CRC.		✓		✓	✓
CRC STATE	READ AND COMPARE THE CRC WORD WITH THE COMPUTED CRC. WRITE THE COMPUTED CRC ON THE DISK.		✓		✓	✓
END STATE	IF THE CRC FROM THE DISK DOES NOT EQUAL THE COMPUTED CRC, SET THE "CRC ERROR" CLEAR READ. WHEN THE DATA BUFFERS ARE EMPTIED INTO THE PROCESSOR SET THE DONE FLAG AND GO TO THE IDLE STATE. START THE ERASE DELAY AND WRITE ZEROS. AT THE END OF THE ERASE DELAY CLEAR WRITE, SET THE DONE FLAG AND GO TO THE IDLE STATE.		✓		✓	✓


$$CRC = \frac{3702 \text{ bits}}{x^{16} + x^{15} + 1}$$

16 Bit Header Word 5 ϕ 's, 8 bit Cyl. Add, 3 ϕ 's
16 bits

REVISIONS
CHANGE NO.
REV.

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES				
DECIMALS	ANGLES	PARTS LIST		
xxx + .005	1.0° 30'	DRN	DATE	
xx + .01		CHK'D	DATE	
x + .1		ENG	DATE	
		PROJ. ENG.	DATE	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		PROD.	DATE	TITLE
MATERIAL	NEXT HIGHER ASSY.	MAJOR STATES TIMING & FLOW		
FINISH	E-11-RK8-0	SIZE CODE	NUMBER	REV.
	SCALE	D T D RK8-E-2		
	SHEET	1 OF 1	DIST.	

This drawing and specifications, herein are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.


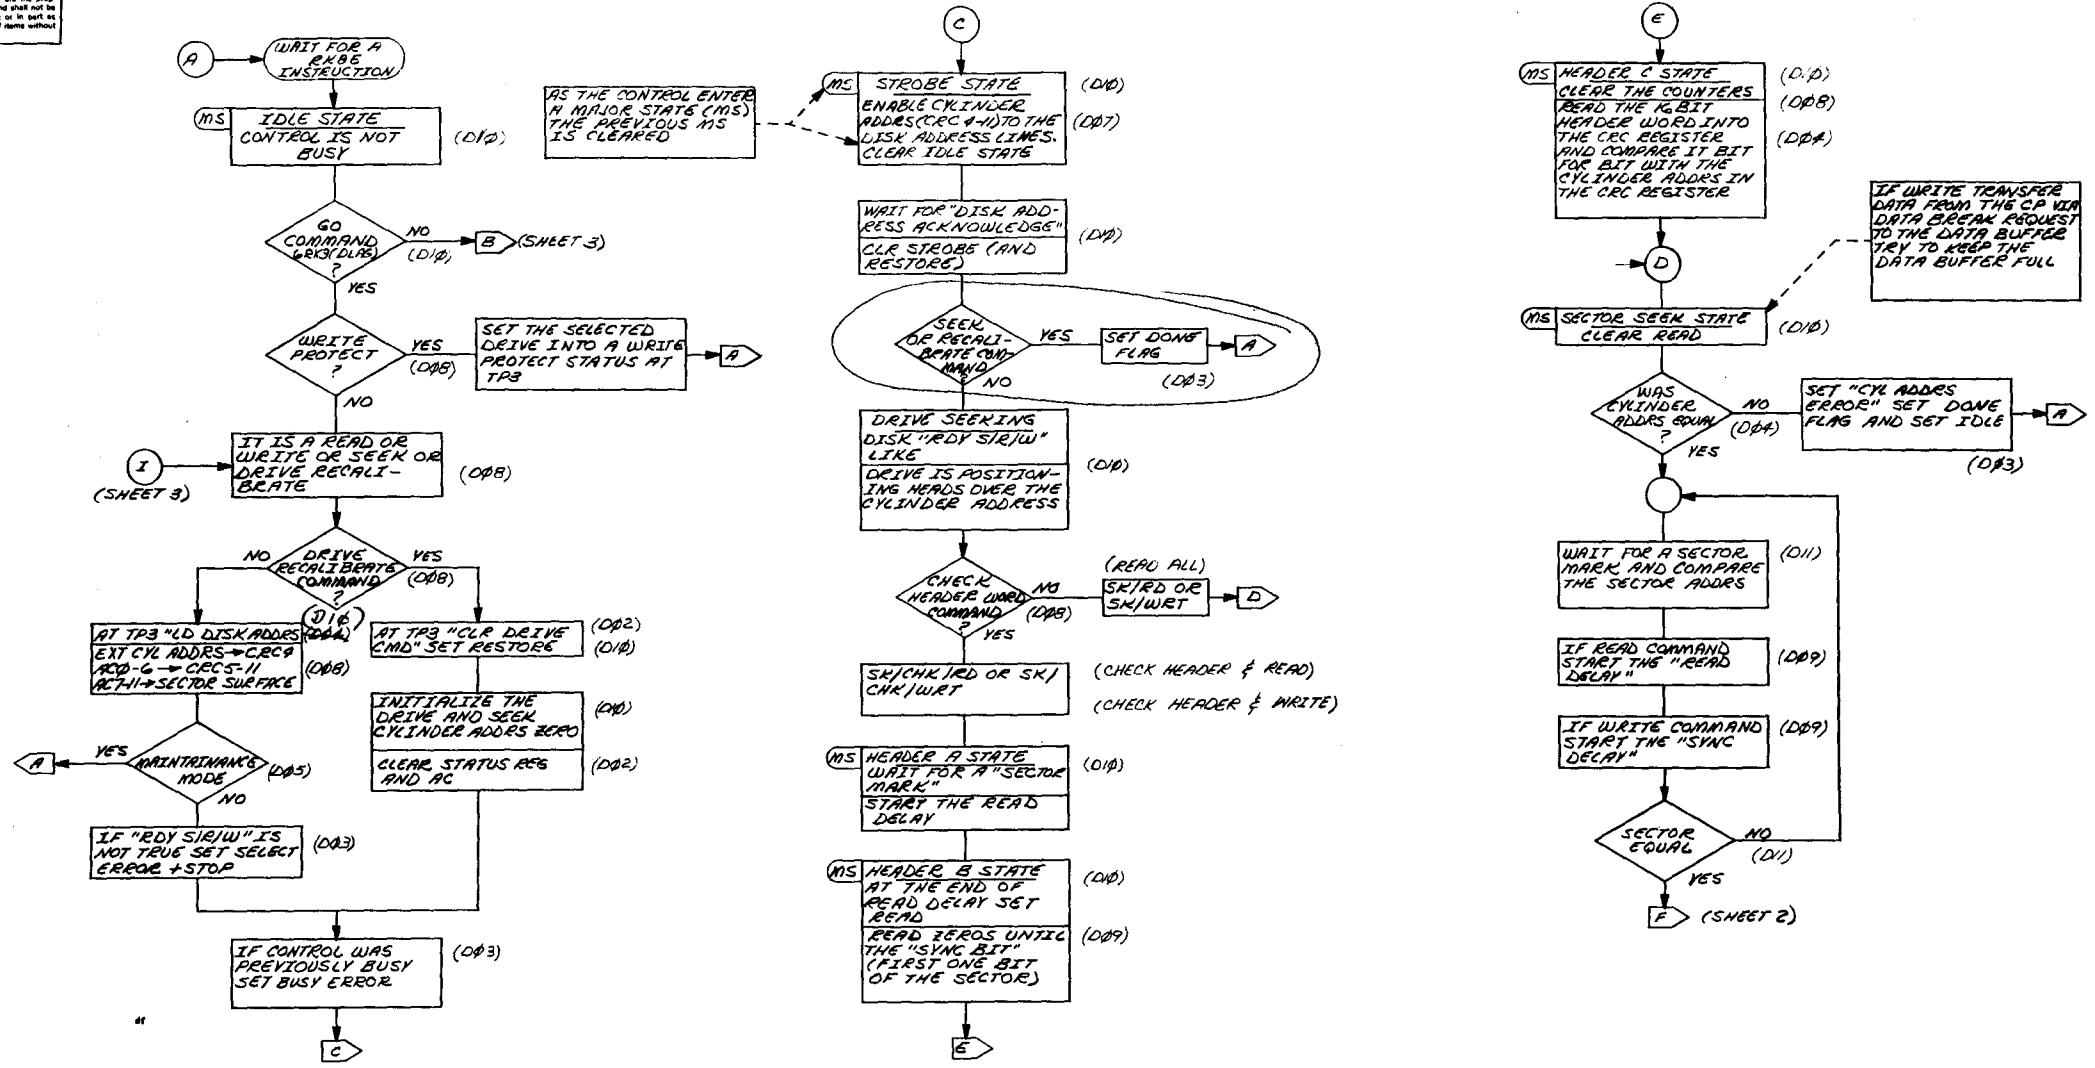


BRUNING 40-522 12840
 DEC FORM NO DRD 102-B

REV	CHANGE NO	DATE
1001	1001	10/18/72

FIRST USED ON OPTION/MODEL RK8-E	QTY.	DESCRIPTION	PART NO.	ITEM NO.
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRN <i>advent</i>	DATE 7/24/72	digital EQUIPMENT CORPORATION MAYFIELD MASSACHUSETTS	
DECIMALS .006	CHKD <i>12/10</i>	DATE 12/22/72	TITLE	
ANGLES 10° 30'	ENG <i>[Signature]</i>	DATE 10/17/72	FLOW DIAGRAM (RK8-E)	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓	PROJ. ENG. <i>[Signature]</i>	DATE 10/17/72	SIZE CODE NUMBER REV.	
MATERIAL <i>++</i>	NEXT HIGHER ASSY.	DATE 10/17/72	D FD RK8-E-1	
FINISH <i>++</i>	SCALE <i>++</i>	DATE 10/17/72	SHEET 1 OF 4	

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied in whole or in part as the basis for the manufacture or sale of items without written permission.

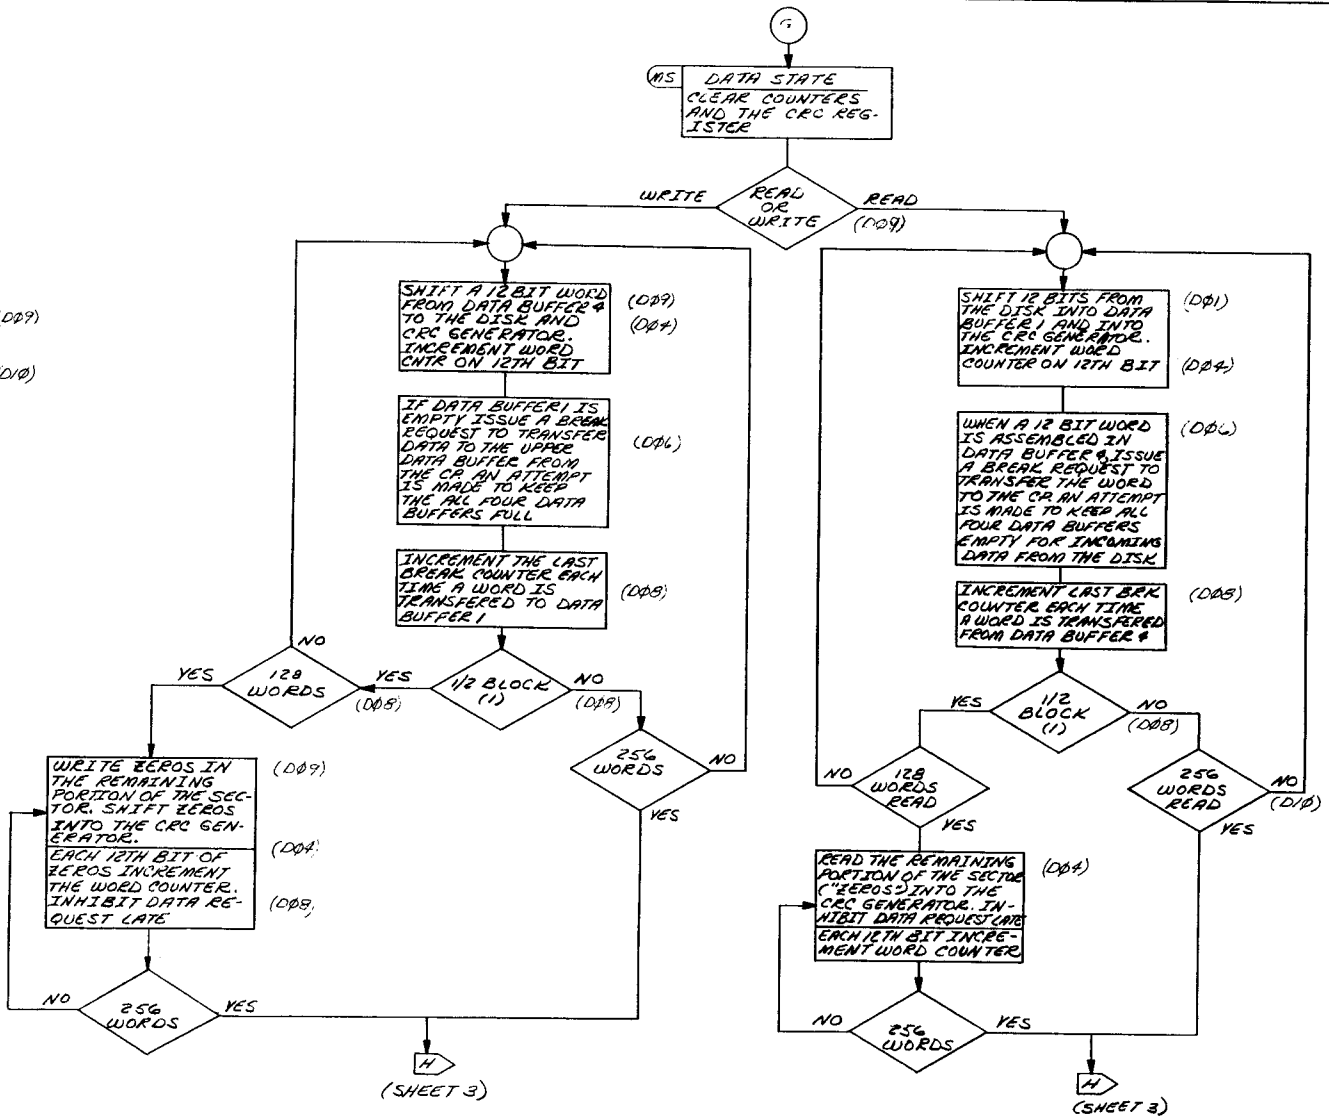
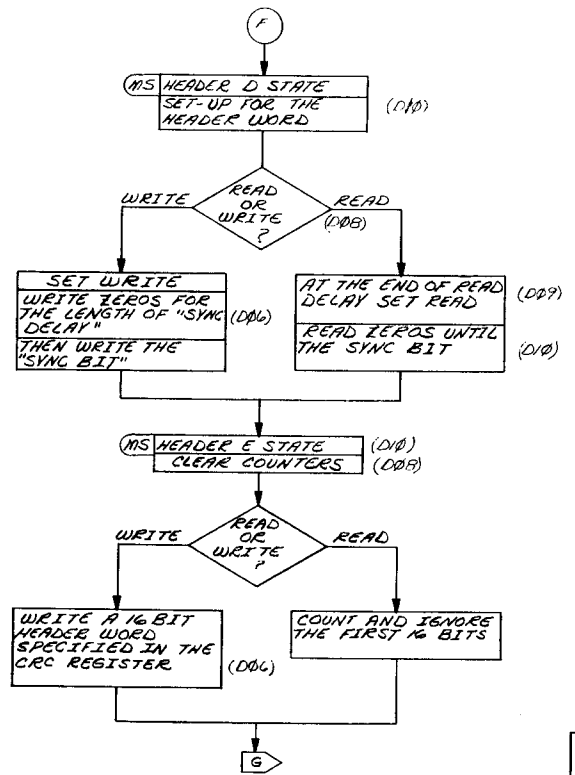


REV	1
CHANGE NO	1
DATE	1/18/71
BY	...

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
11K-L				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES	DRN	DATE	digital EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS	
TOLERANCES	CHK'D	DATE	TITLE	
DECIMALS ANGLES	ENG	DATE	FLOW DIAGRAM (RK-E)	
.XXX - .005 10' 30'	PROJ. ENG	DATE	SIZE CODE	
.XX - .02	PROD.	DATE	D.F.D. RK-E-1	
.X - .1			NUMBER	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY			REV.	
MATERIAL	NEXT HIGHER ASSY.		SHEET 2 OF 4	
FINISH			DIST.	

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

1-3-8X8

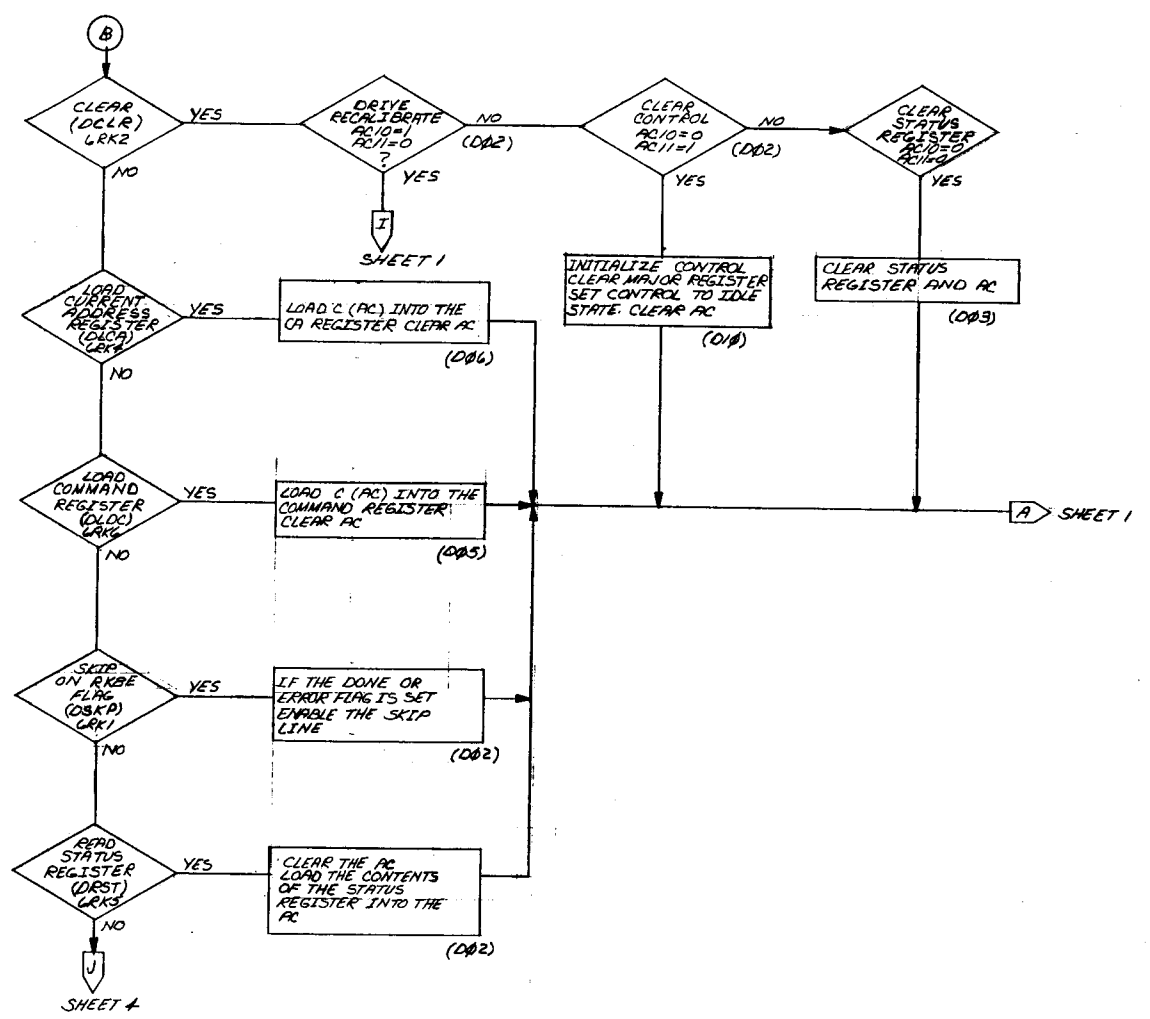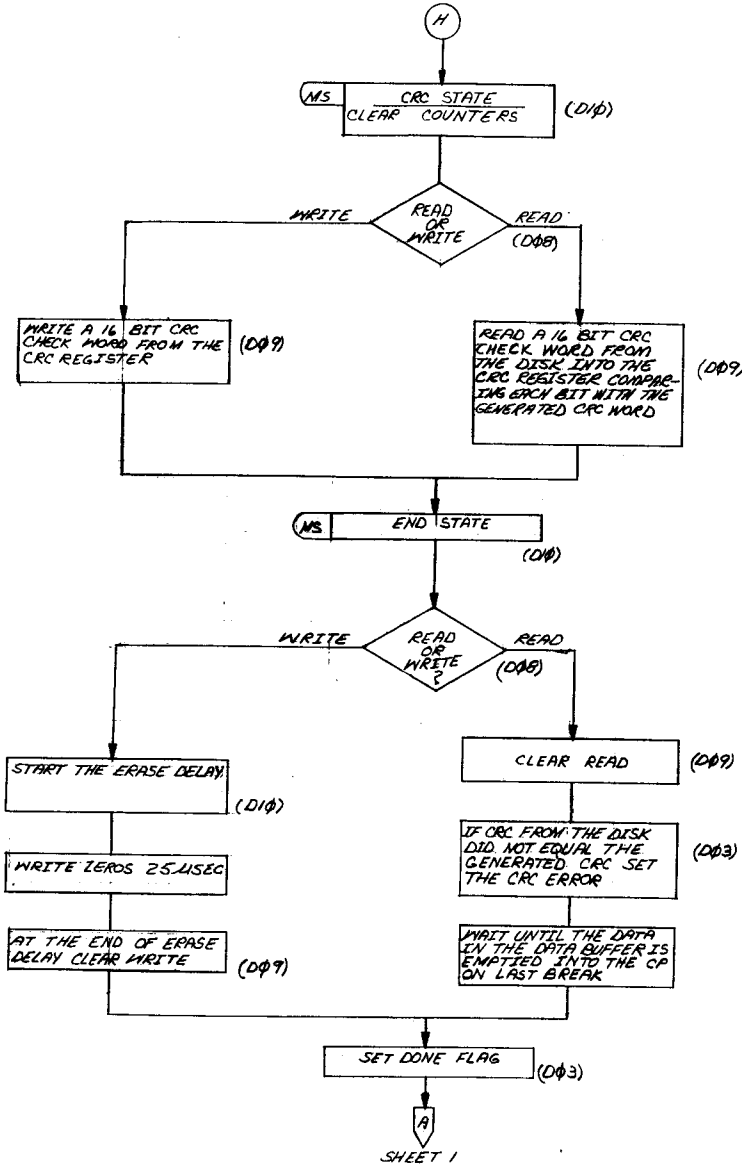


BRUNING 40-352 15840
 DEC FORM NO DRD 107-B
 REVISIONS
 CHANGE NO. 10X 3/2/72
 REV. 1/87

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES	DRN. <i>M. Rame</i>	DATE <i>6/23/72</i>	digital EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS	
TOLERANCES	CHK'D <i>TS-CG</i>	DATE <i>6/9/72</i>		
DECIMALS	ANGLES	ENG. <i>W. J. ...</i>	DATE <i>10/17/71</i>	TITLE
XXX + .005	± 0° 30'	PROJ. ENG. <i>W. J. ...</i>	DATE <i>11/16/71</i>	FLOW DIAGRAM (RK8-E)
XX - .02		DRAW. <i>W. J. ...</i>	DATE <i>10/22/71</i>	
X = .1		REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓		
MATERIAL	NEXT HIGHER ASSY.		SIZE CODE	NUMBER
FINISH	B-DD-RK8-0		D	FD RK8-E-1
SCALE	SHEET 3 OF 4		DIST.	

The drawing and specifications herein are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

REV. NO. 1
 SIZE CODE D
 PART NO. RK8-E-1
 SHEET NO. 2

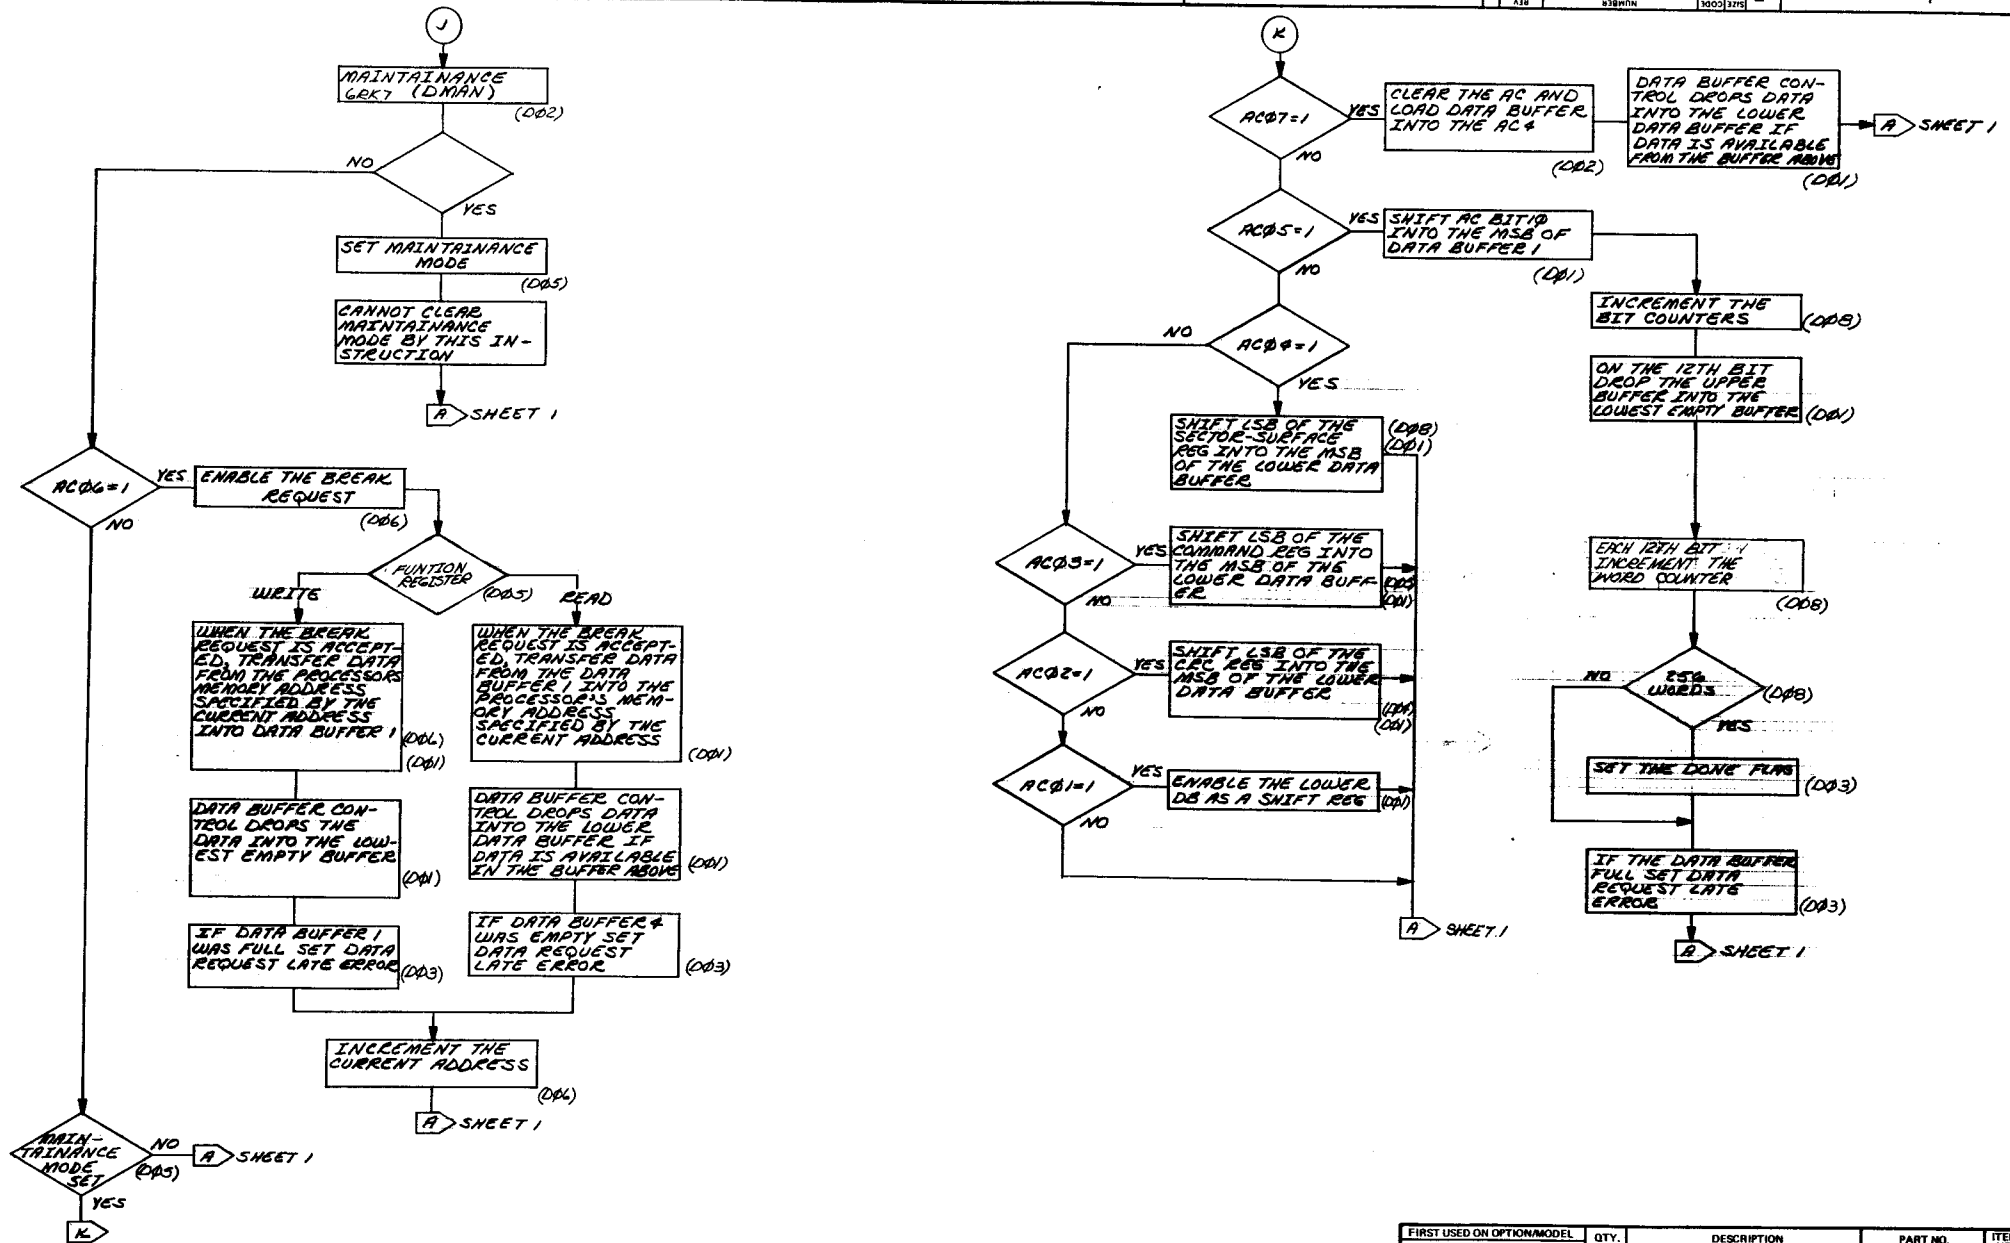

REV. NO. 1
 CHANGE NO. 10000000
 C-K
 DEC FORM NO. DDD 102-B

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRN: <i>[Signature]</i>	DATE: 7-17-72	digital EQUIPMENT CORPORATION MAYFIELD MASSACHUSETTS TITLE FLOW DIAGRAM (RK8-E)	
DECIMALS ANGLES	CHK'D: <i>[Signature]</i>	DATE: 11-9-72		
.XXX - .006	ENG: <i>[Signature]</i>	DATE: 11/17/72		
.XX - .02	PROJ. ENG: <i>[Signature]</i>	DATE: 11/17/72		
X - .1	DRAWN: <i>[Signature]</i>	DATE: 11/17/72		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY	BROD: <i>[Signature]</i>		DATE: 11/17/72	
MATERIAL	NEXT HIGHER ASSY.			
FINISH	++	B-DD-RK8-0	SIZE CODE	NUMBER
		SCALE	++	REV.
		SHEET	4 OF 4	
		DIST.		

PAGE REVISION CONTROL SHEET

SH NO.		PAGE REVISIONS													REMARKS
	1	A													
	2	A													
	3	A													
	4	A													
	5	A													
	6	A													
	7	A													
ECO NO.															
ETCH REV.															
ENG.															
DATE															

FIRST USED ON OPTION/MODEL
RK8-E

DRN. *[Signature]*
 CHK'D. *[Signature]* DATE 10-9-72
 ENG. *[Signature]* DATE 10/9/72
 PROJ. ENG. *[Signature]* DATE 10/9/72
 PROJ. *[Signature]* DATE 10/9/72
 NEXT HIGHER ASSY.

digital EQUIPMENT CORPORATION
 MAYNARD, MASSACHUSETTS

TITLE
 DATA BUFFER & STATUS

B-DD-RK8-0
 SCALE
 SHEET 1 OF 7

SIZE CODE NUMBER REV.
 B CS M7104-0-1 A



DIST.

"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
 COPYRIGHT © DIGITAL EQUIPMENT CORPORATION"

[Handwritten mark]

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied in whole or in part as the basis for the manufacture or sale of items without written permission.

NOTES:

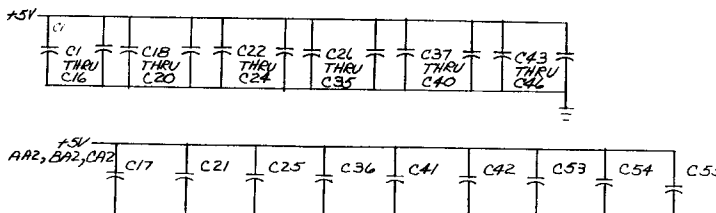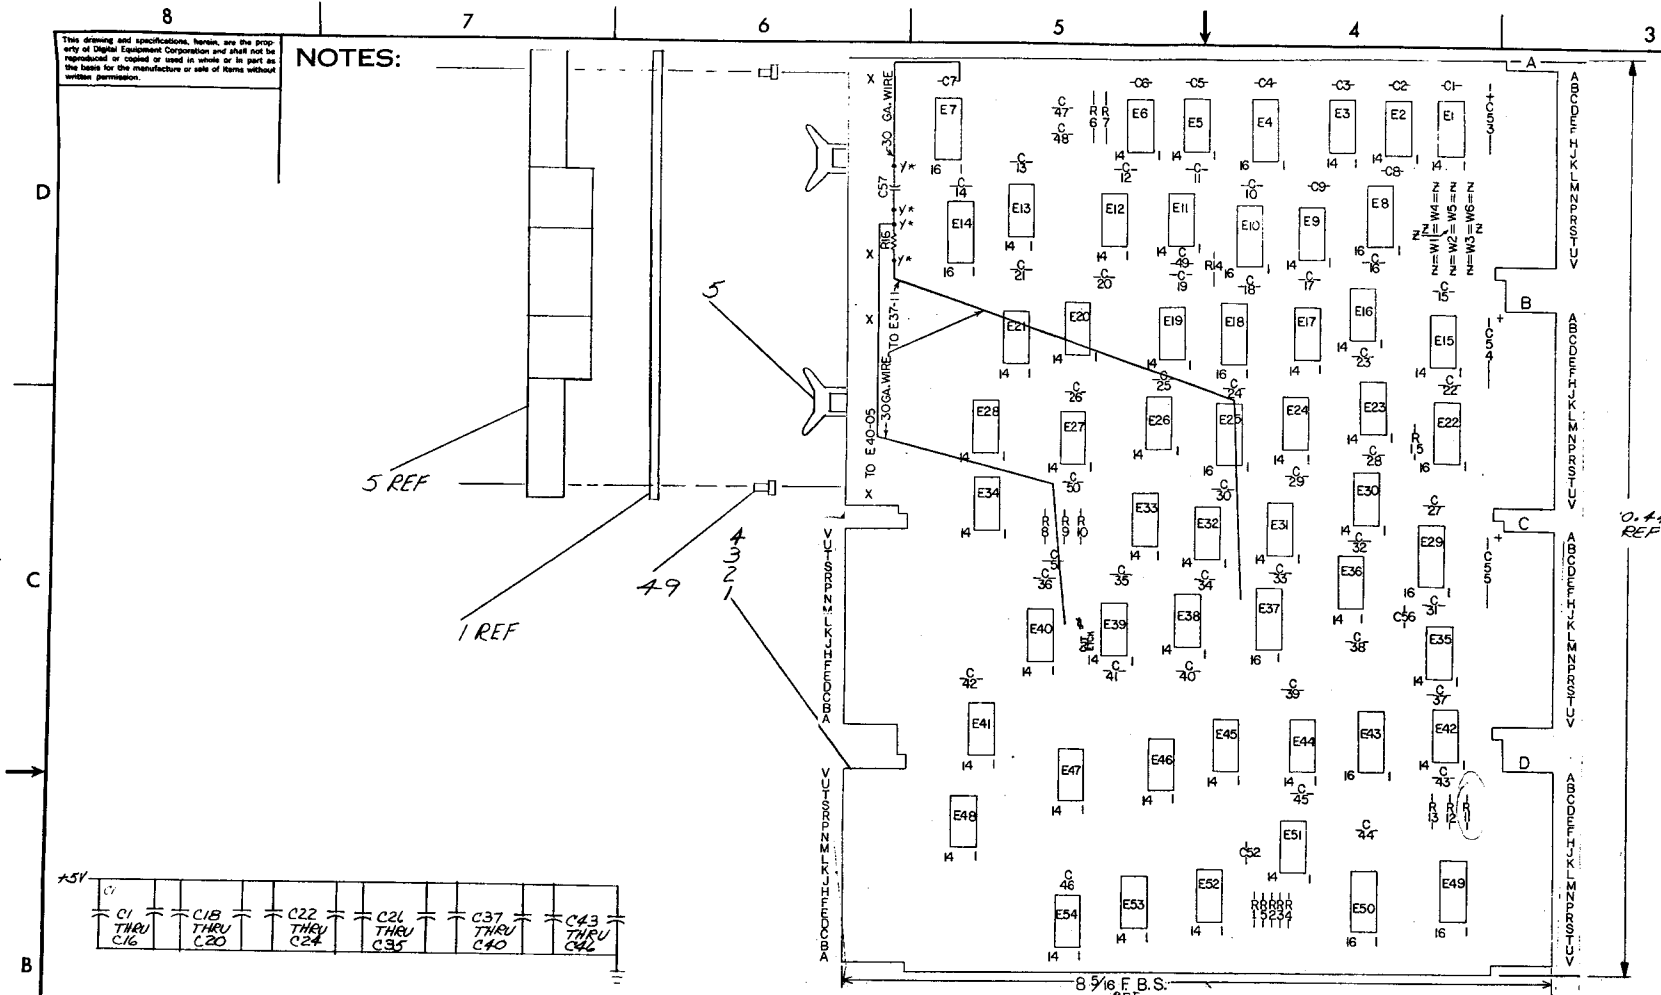

AC2, AF1, AN1, AT1, AF2, AN2, AT2, BC1, BF1, BN1, BT1, BC2, BF2, BN2, BT2, CC1, CF1, CN1, CT1, CC2, CF2, CN2, CT2, DC1, DF1, DN1, DT1, DC2, DF2, DN2, DT2.

1	E43	I.C. DEC 74193	1910018	42
4	E8, E22, E29, E49	I.C. DEC 8235	1909935	41
1	E21	I.C. DEC 74H04	1909931	40
1	E36	I.C. DEC 8881	1909705	39
1	E1	I.C. DEC 314	190974	38
4	E16, E23, E27, E31	I.C. DEC 7404	1909486	37
1	E38	I.C. DEC 74H74	1909667	36
1	E37	I.C. DEC 8251B	1909594	35
1	E30	I.C. DEC 384	1909486	34
4	E2, E15, E35, E42	I.C. DEC 380	1909885	33
2	E4, E26	I.C. DEC 74H53	1909062	32
1	E20	I.C. DEC 74H00	1909056	31
6	E3, E5, E9, E17, E29, E32	I.C. DEC 7495	1909055	30
6	E13, E19, E28, E39, E51, E53	I.C. DEC 7402	1909004	29
1	E12	I.C. DEC 7413	1905587	28
1	E14	I.C. DEC 7476	1905585	27
2	E4, E44	I.C. DEC 7440	1905579	26
1	E47	I.C. DEC 7410	1905576	25
3	E45, E46, E54	I.C. DEC 7400	1905575	24
2	E39, E52	I.C. DEC 7474	1905547	23
2	R6, E7	RES., 51K, 1/8W, 1%, MF	1304854	22
2	R2, R3	RES., 100, 1/4W, 5%, C.C.	1301322	21
2	R12, R13	RES., 47K, 1/4W, 5%, C.C.	1300447	20
1	R9	RES., 2.2K, 1/4W, 5%, C.C.	1300417	19
1	R11	RES., 1.8K, 1/4W, 5%, C.C.	1300398	18
2	R1, R4	RES., 390, 1/4W, 5%, C.C.	1300309	17
6	R5, R8, R10, R14, R15, R16	RES., 100, 1/4W, 5%, C.C.	1300229	16
2		SPACER (CABLE CLAMP)	1202704	15
10	C1 THRU C6, C8 THRU C32 THRU C38, C39 THRU C43 THRU C46	CAP., 0.1uF, 100V, 20%, DISC	1001610	14
3	C53 THRU C55	CAP., 0.1uF, 35V, 20%, TANT	1000067	13
2	C49, C56	CAP., 470pF, 100V, 5% DM	1000024	12
1	C51	CAP., 330pF, 100V, 5% DM	1000023	11
1	C52	CAP., 100pF, 100V, 5% DM	1000020	10
1	C50	CAP., 100pF, 100V, 5% DM	00018	9
1	C47	CAP., 39pF, 100V, 5% DM	1000010	8
1	C48	CAP., 100pF, 100V, 5% DM	1000006	7
6	C17, C21, C25, C36, C41, C42	CAP., 0.02uF, 100V, 20%, DISC	1000004	6
2		HANDLE, FLTP, CNTP, MARGENTA	9008337-06	5
1		ETCHED CIRCUIT BOARD	5010064	4
3		MODULE ECO HISTORY	B-MH-M7104-B-3	3
2		ASSY/DRILLING HOLE LAYOUT	D-MH-M7104-B-5	2
1		X-Y COORDINATE HOLE LOCATION	K-CO-M7104-B-4	1

AR	#	30 AWG WIRE, SOLID, GREEN	9102740-55	52
4		GRIPLETS	1210244	0
1	C57	CAP., 1000 pF 5% DM	1000042	50
4		EVELET	9006750	49
9		SPLIT LUGS	9006735	48
4	E4, E10, E18, E25	I.C. DEC 74174	1910652	47
1	E7	I.C. DEC 74123	1910436	46
1	E50	I.C. DEC 7496	1910363	45
3	E16, E40, E44	I.C. DEC 7408	1910155	44
1	E33	I.C. DEC 7437	1910091	43

DEC	REV	DATE	BY	CHKD
DEC 7423	8	16		
DEC 7474	8	16		
DEC 749L	5	12		
DEC 74193	8	16		
DEC 8235	8	16		
DEC 314	1	8		
DEC 8251B	8	16		
DEC 384	1	8		
DEC 380	1	8		
DEC 7473	4	11		
DEC 7476	5	13		
IC TYPE	GND	+5V		

GND AND 5V ARE USUALLY PIN 7 AND 14 RESPECTIVELY EXCEPTIONS ARE STATED ABOVE

FIRST USED ON OPTION MODEL: RK8-E

ETCH BOARD REV: 8

DATE: 7/8/72

DRN: [Signature]

CHKD: [Signature]

ENGR: [Signature]

PROJ. ENGR: [Signature]

PROB. DATE: 10/6/72

NEXT HIGHER ASSY: 8-DD-RK8-B

SCALE: 1/16" = 1"

SHEET: 2 OF 2

TITLE: DATA BUFFER & STATUS




SIZE CODE: DCSM7104-0-1

NUMBER: 1

REV. A

SEMICONDUCTOR CONVERSION CHART


This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

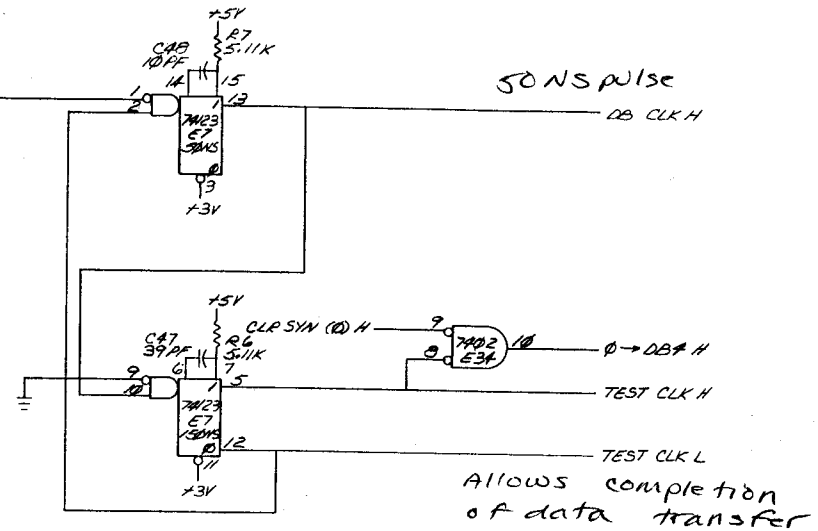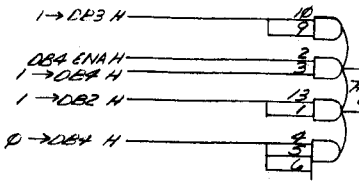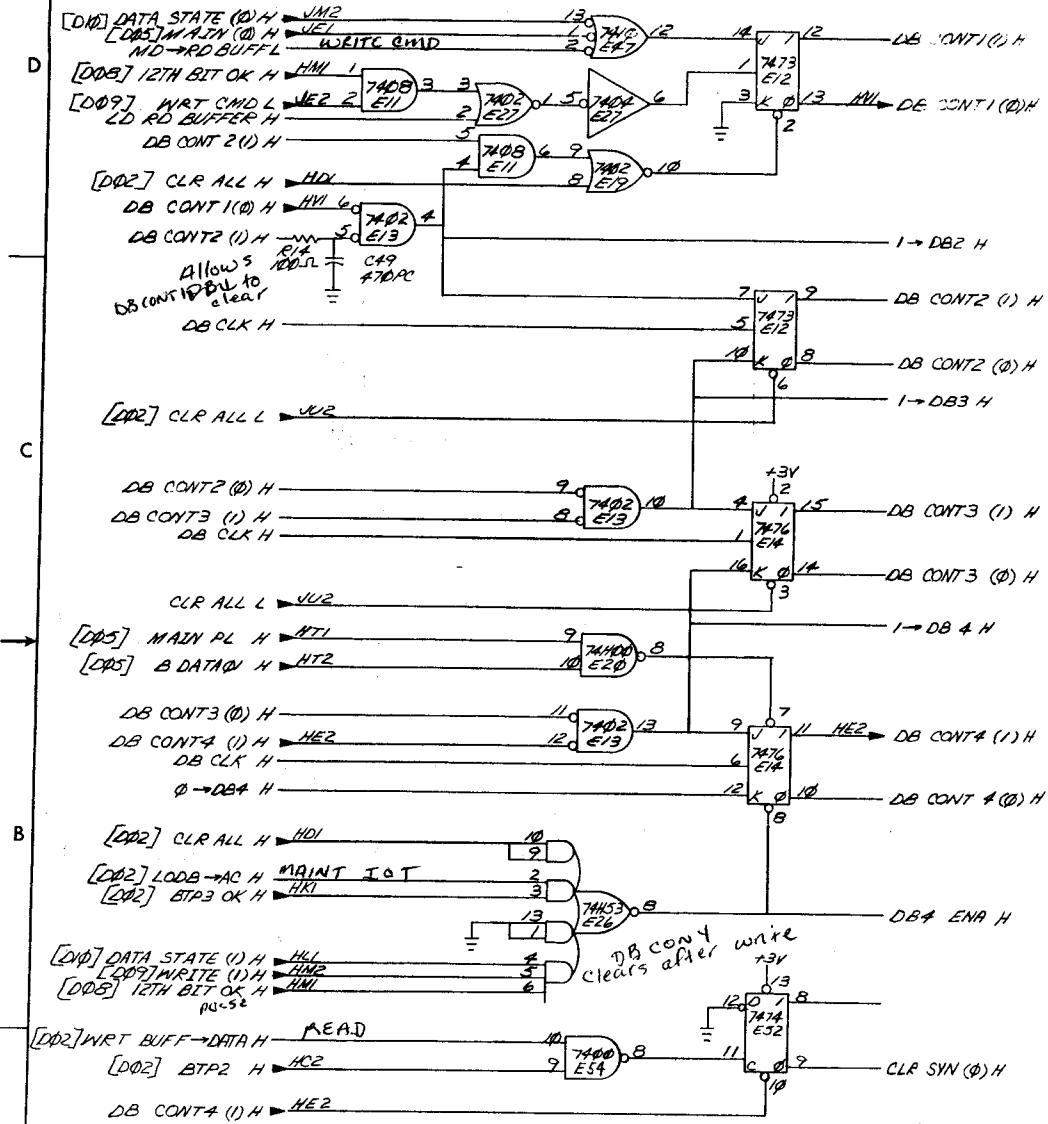

REV. NO. CHANGE NO. DATE

(DATA BUFFER CONTROL)			
FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.
RKB-E			
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES. TOLERANCES			
DECIMALS	ANGLES	TITLE (D01A) DATA BUF & STATUS	
XXX + .005	± 0° 30'	REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY	
MATERIAL			
NEXT HIGHER ASSY.			
B-UD-RKB-0		SIZE CODE	NUMBER
SCALE		D C S M 7104-0-1	
SHEET 3 OF -		REV. A	

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

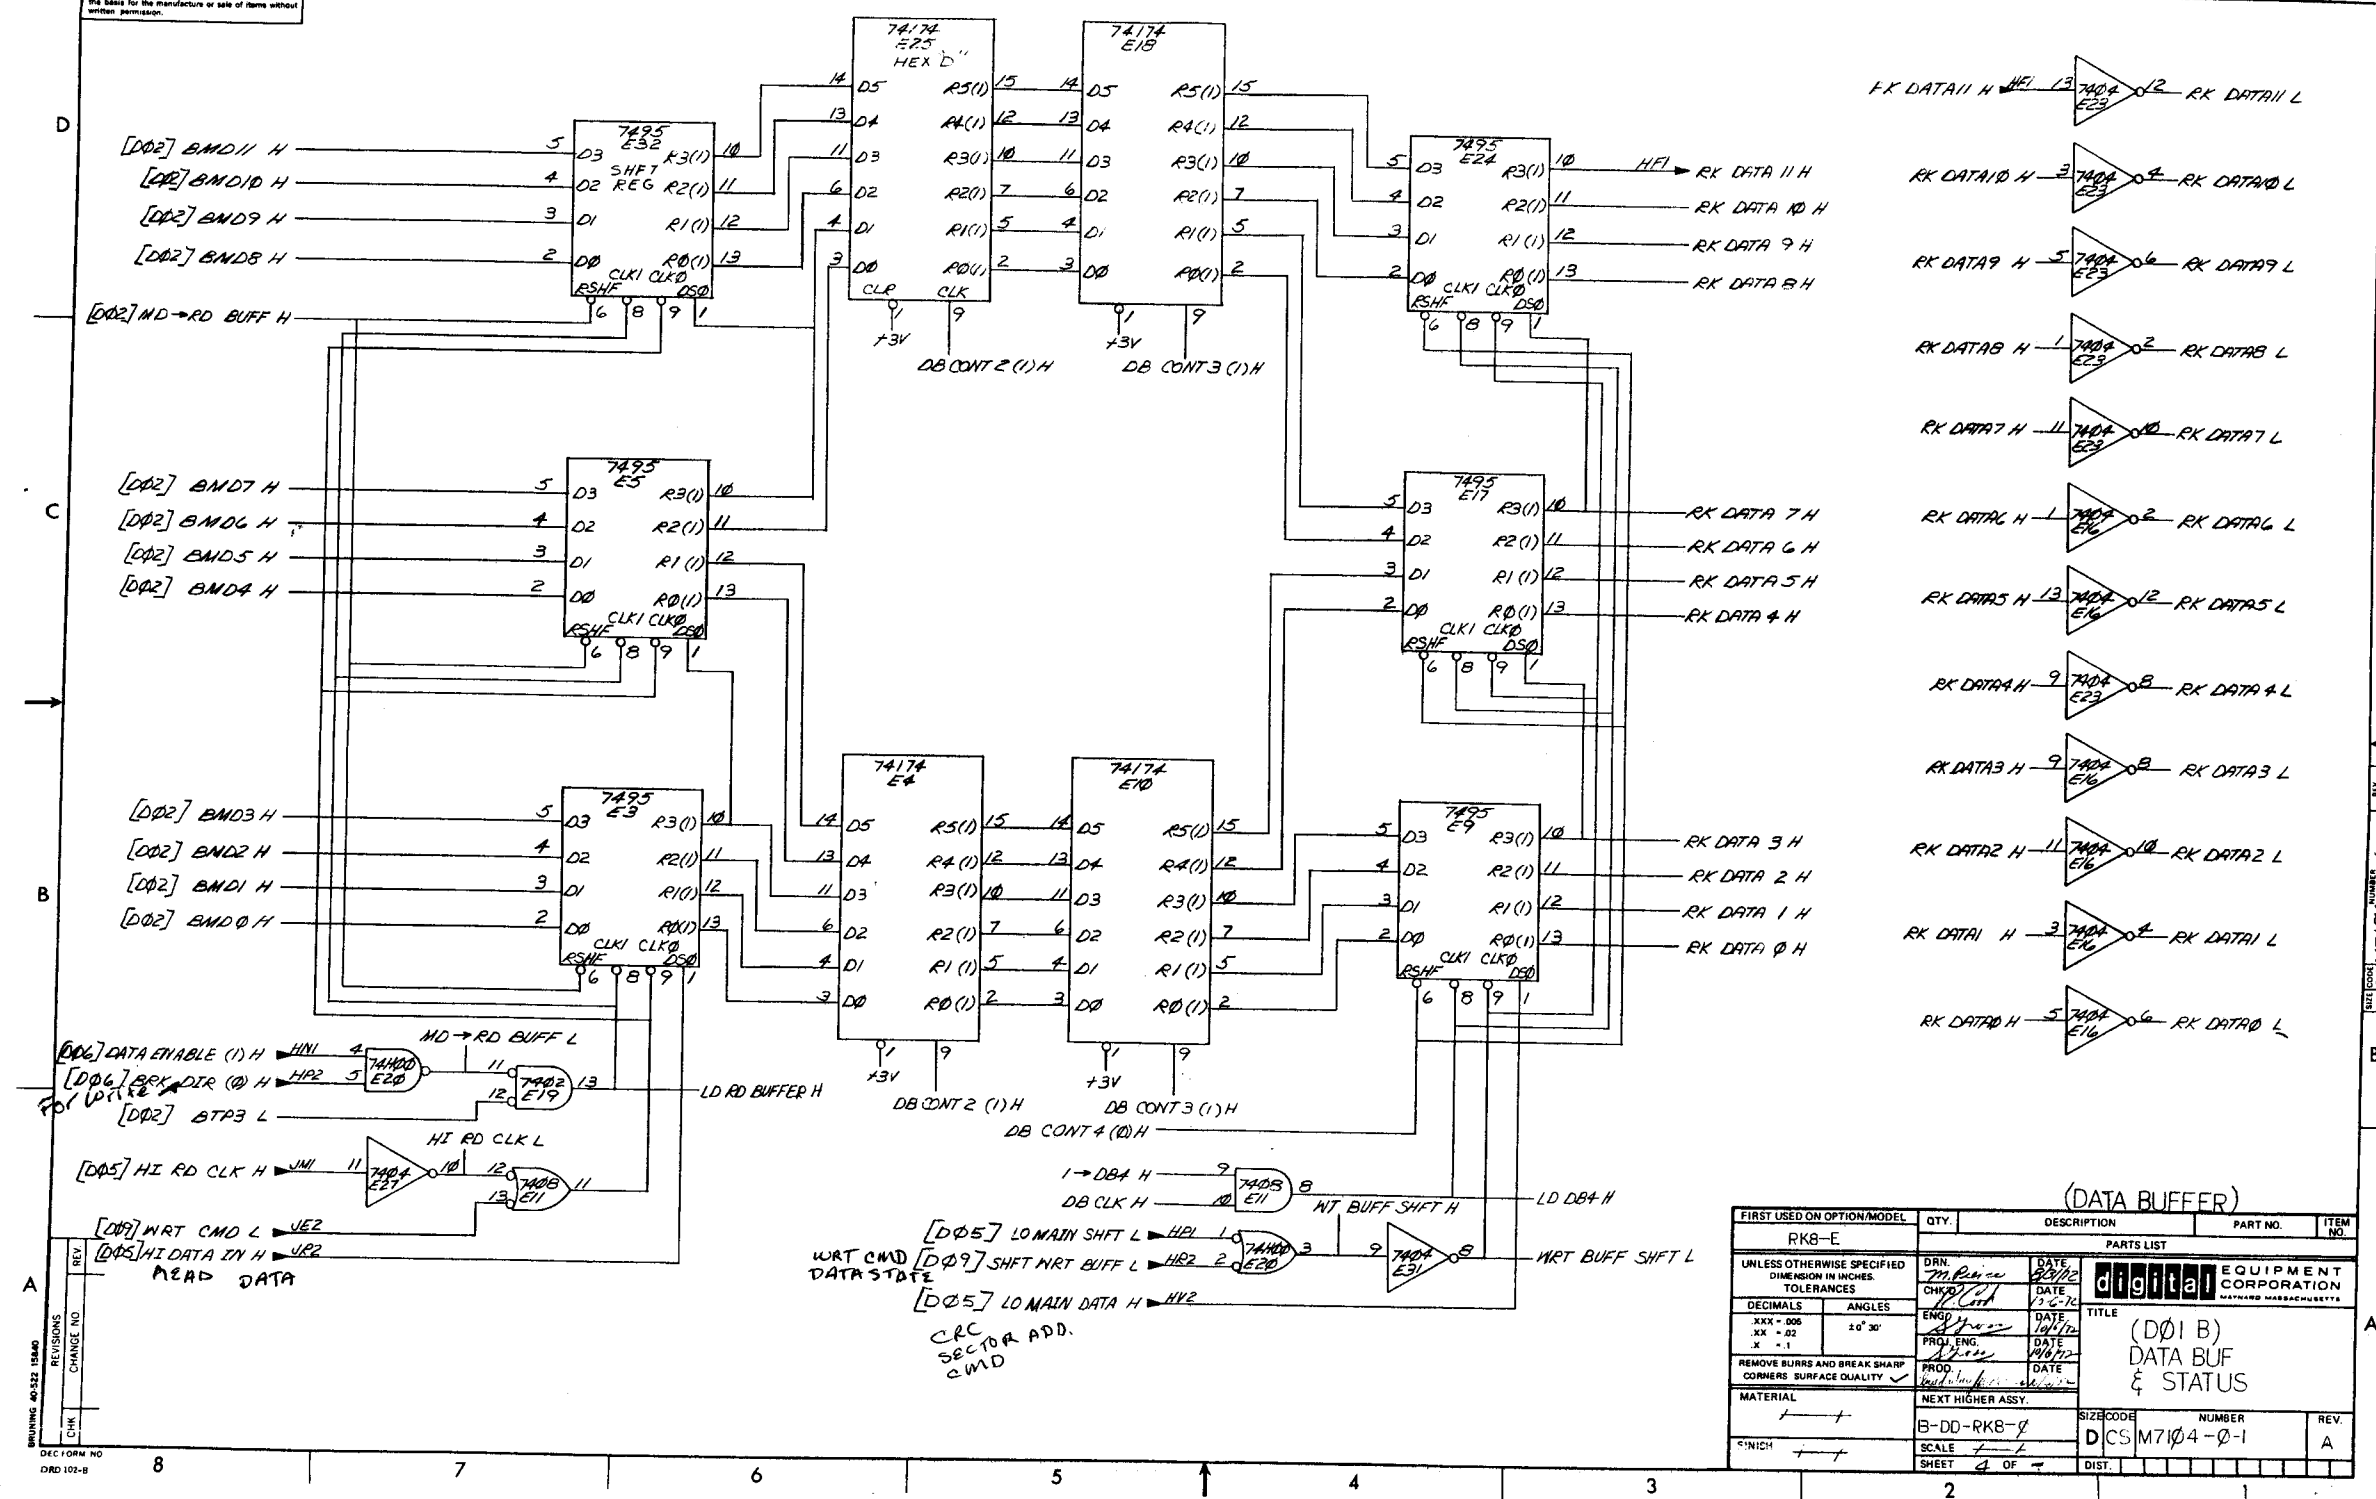

- RK DATA 15 H → RK DATA 15 L
- RK DATA 14 H → RK DATA 14 L
- RK DATA 13 H → RK DATA 13 L
- RK DATA 12 H → RK DATA 12 L
- RK DATA 11 H → RK DATA 11 L
- RK DATA 10 H → RK DATA 10 L
- RK DATA 9 H → RK DATA 9 L
- RK DATA 8 H → RK DATA 8 L
- RK DATA 7 H → RK DATA 7 L
- RK DATA 6 H → RK DATA 6 L
- RK DATA 5 H → RK DATA 5 L
- RK DATA 4 H → RK DATA 4 L
- RK DATA 3 H → RK DATA 3 L
- RK DATA 2 H → RK DATA 2 L
- RK DATA 1 H → RK DATA 1 L
- RK DATA 0 H → RK DATA 0 L

(DATA BUFFER)





FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RKB-E		PARTS LIST		
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES		digital EQUIPMENT CORPORATION		
DECIMALS	ANGLES	TITLE (D01 B) DATA BUF & STATUS		
XXX - 006	±0°30'	SIZE CODE NUMBER		
.XX - 02		DCS M7104-0-1		
.X - 1		SCALE		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		SHEET 4 OF 4		
MATERIAL	NEXT HIGHER ASSY.	REV. A		
FINISH		DIST.		

REV. A
 CHANGE NO.
 CHECK
 BRUNING 40-522 15-80
 DEC FORM NO. D9D 102-B

REV. A
 DCS M7104-0-1

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

D
C
B
A

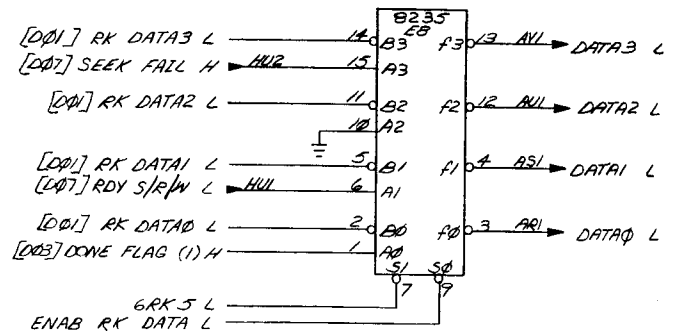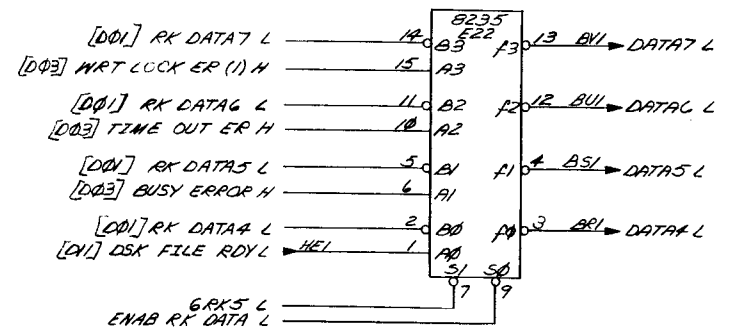
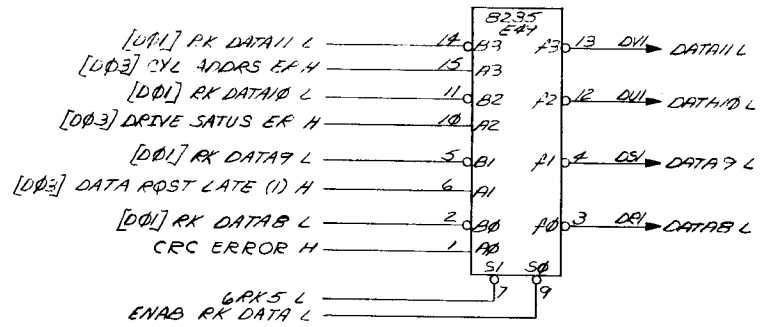
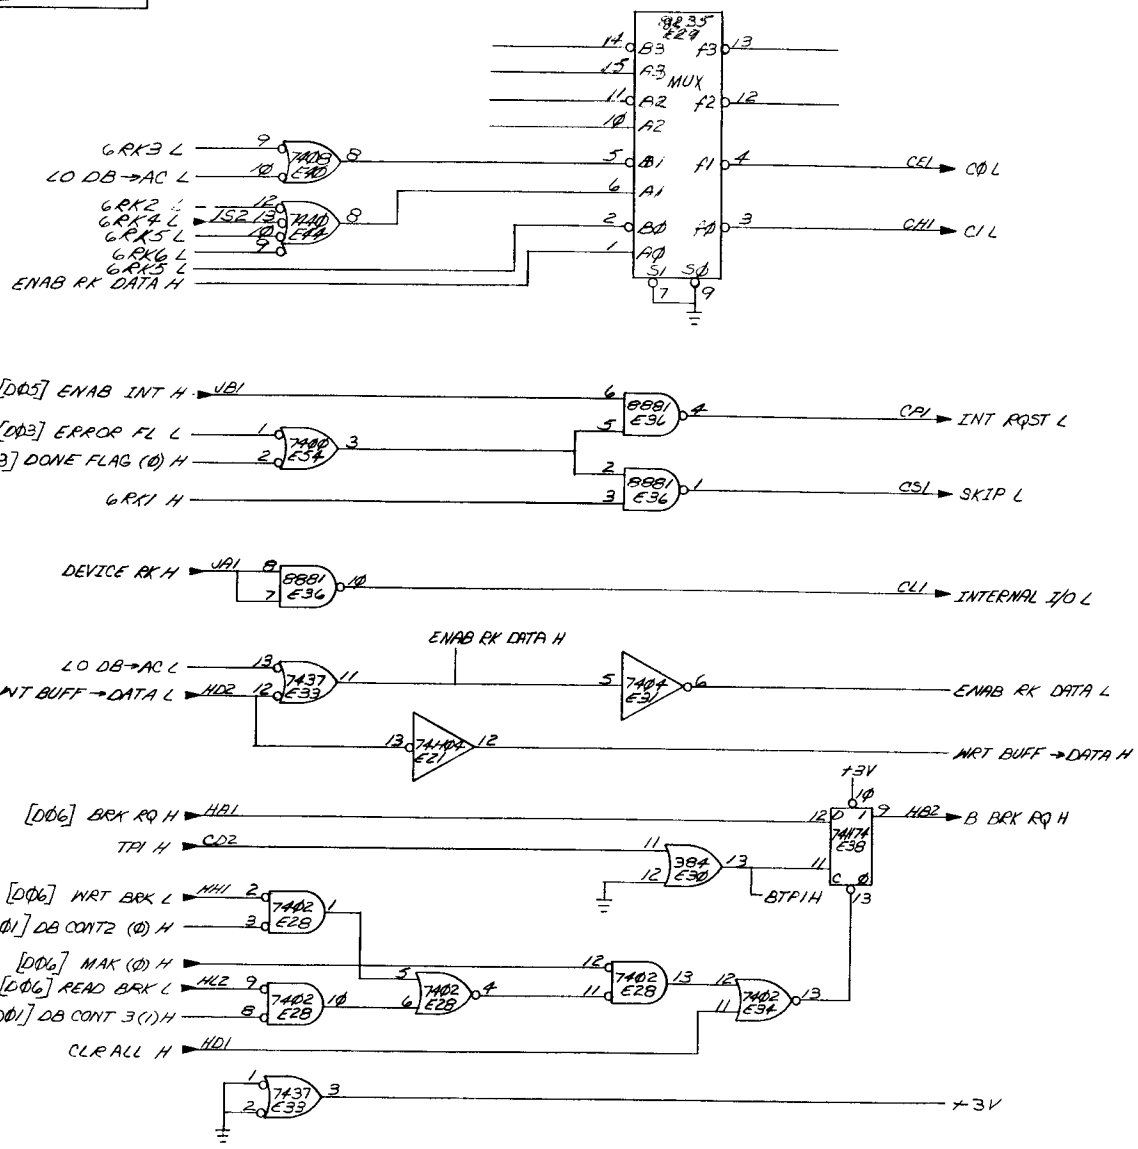


(OMNIEBUS DRIVERS)

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RKB-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES		DRN. DATE 10/14/72	digital EQUIPMENT CORPORATION	
DECIMALS	ANGLES	CHKD. DATE 10/17/72	MAYNARD MASSACHUSETTS	
.XX - .005	10° 30'	ENG. DATE 10/17/72	TITLE (D02A)	
.XX - .02		PROJ. ENG. DATE 10/17/72	DATA ELIF & STATUS	
.X - .1		PROD. DATE 10/17/72		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY				
MATERIAL	NEXT HIGHER ASSY.			
	B-DD-RK-0			
FINISH	SCALE	SIZE CODE	NUMBER	REV.
	1:1	D	CSM7104-0-1	A
	SHEET 5 OF 5	DIST.		

REV. CHANGE NO. CHECK

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

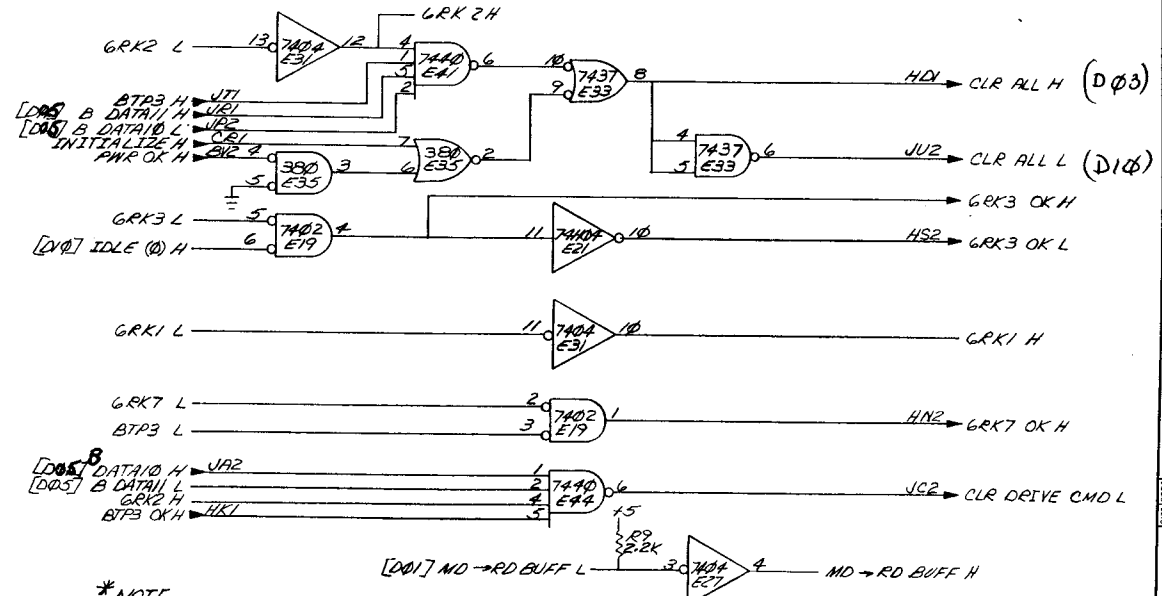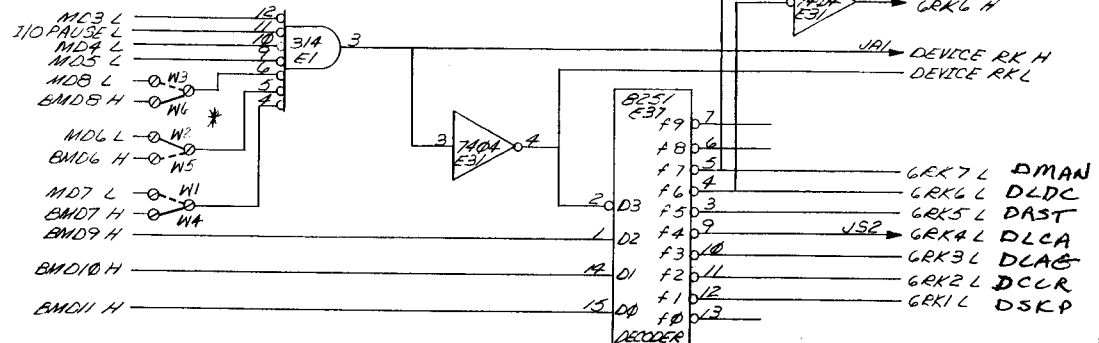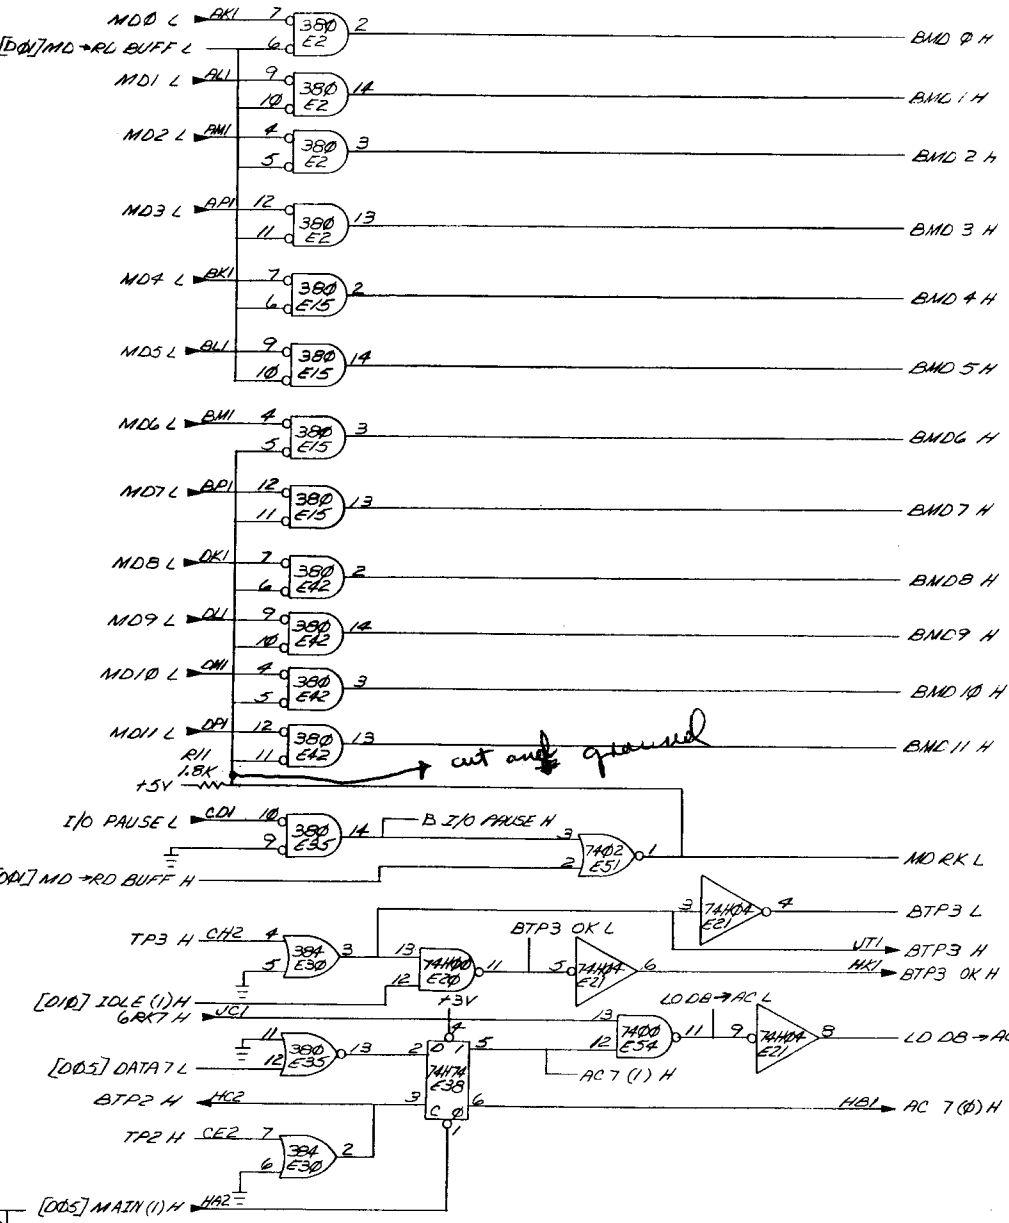

*NOTE
 IOT 674X AS SHOWN
 VALID IOT'S ARE
 674X
 675X
 676X
 677X


(OMNIEUS RECEIVERS)

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES		DRN	DATE	
TOLERANCES		CHK'D	DATE	
DECIMALS	ANGLES	ENG.	DATE	
.XXX - .005	10° 30'	PROJ. ENG.	DATE	
.XX - .02		PROD.	DATE	
.X - .1				
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY				
MATERIAL		NEXT HIGHER ASSY		
++		B-DD-RK8-0	SIZE CODE	NUMBER
FINISH		++	SCALE	DIST
		6 OF 1		

digital EQUIPMENT CORPORATION
 TITLE (D02 B)
 DATA BUF & STATUS

BRUNING 40-332 15840
 DYC FORM NO
 DRD 102-B

REV A
 NUMBER
 DCS M7104-0-1

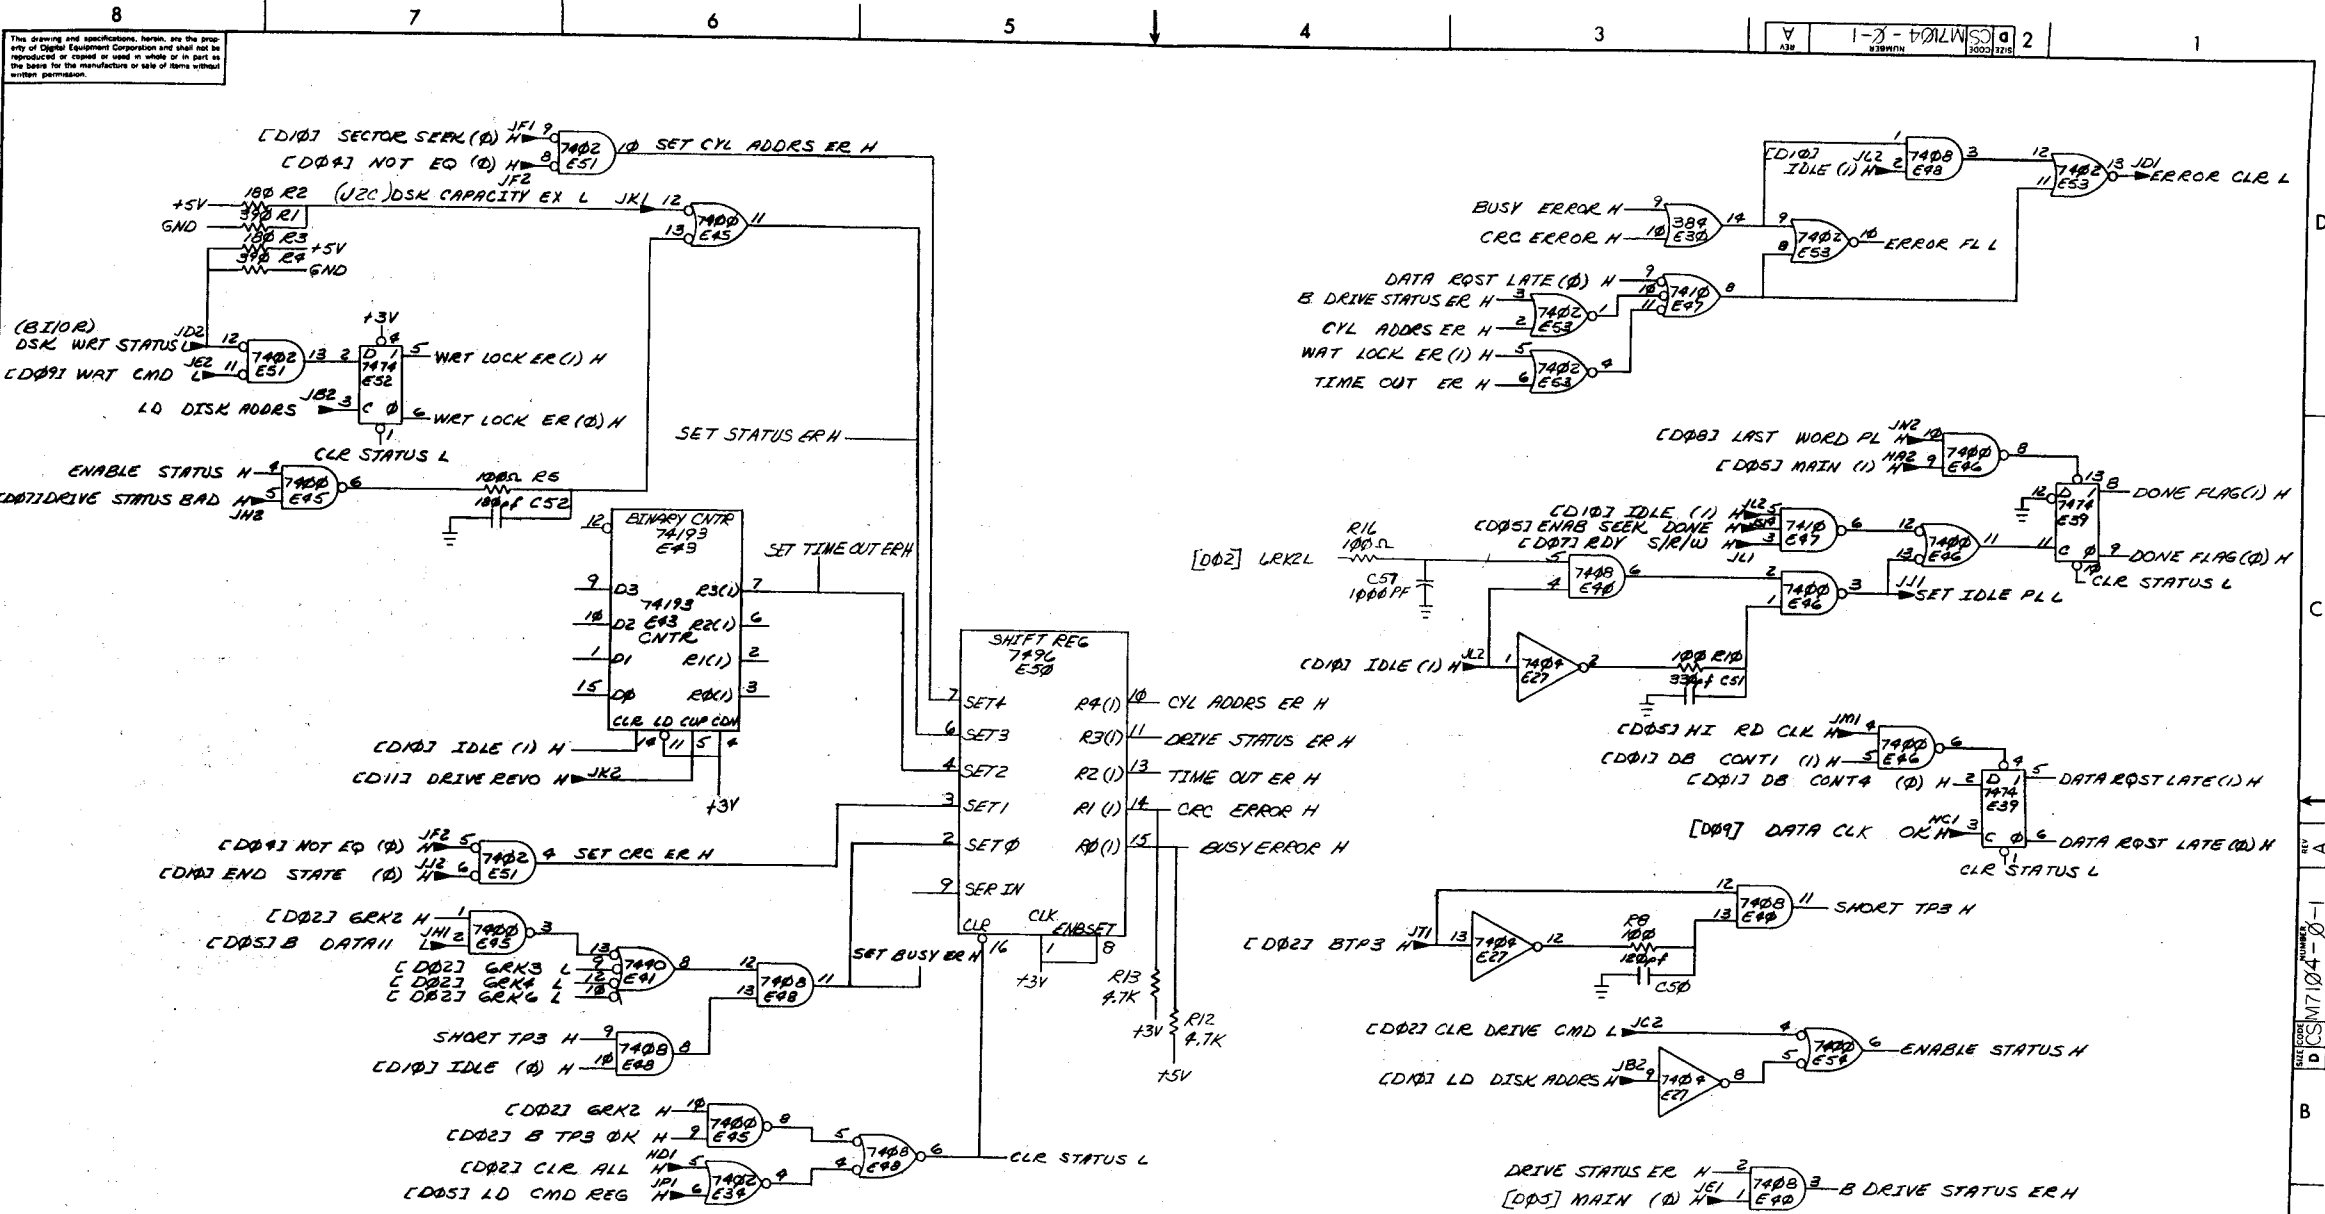

(STATUS REGISTER ERROR DETECT)

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRAWN <i>akibat</i>	DATE 7-4-72	<div style="text-align:center"> digital EQUIPMENT CORPORATION <small>MAYNARD MASSACHUSETTS</small> </div> <p style="text-align:center">TITLE (D03) DATA BUF & STATUS</p>	
DECIMALS	CHK'D <i>llb</i>	DATE 4/2/72		
ANGLES	ENG <i>Shaw</i>	DATE 7/17/72		
XXX - .006 XX - .02 X - .1	PROJ. ENG. <i>Shaw</i>	DATE 10/6/72		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓	PROD. <i>Shaw</i>	DATE 10/6/72		
MATERIAL	NEXT HIGHER ASSY.	SIZE CODE	NUMBER	REV.
FINISH	B-DL-RK8-0	SCALE	DCS M7104-01	A
	SHEET	OF	DIST	

REV.	NO.	DATE
P01	1	7-7-72
P02	2	7-7-72

DEC FORM NO. 138D 103-B

REV. A
ITEM NO. DCSM7104-01


PAGE REVISION CONTROL SHEET

REMARKS

PAGE REVISIONS

SH NO.	DATE	ENG.	ETCH REV.	ECO NO.	REMARKS
1					
2					
3					
4					
5					
6					

FIRST USED ON OPTION/MODEL
RK8E



TITLE
MAJOR REGISTERS

DRN	<i>[Signature]</i>	DATE	10-9-72
CHK'D	<i>[Signature]</i>	DATE	10-9-72
ENG.	<i>[Signature]</i>	DATE	10/9/72
PROJ. ENG.	<i>[Signature]</i>	DATE	10/9/72
PROD.	<i>[Signature]</i>	DATE	10/9/72


"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
COPYRIGHT © DIGITAL EQUIPMENT CORPORATION"

NEXT HIGHER ASSY.
B-DD-RK8-0
SCALE *1/4" = 1"*
SHEET 1 OF 6


SIZE	CODE	NUMBER	REV.
B	CS	M7105-0-1	A

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

NOTES:

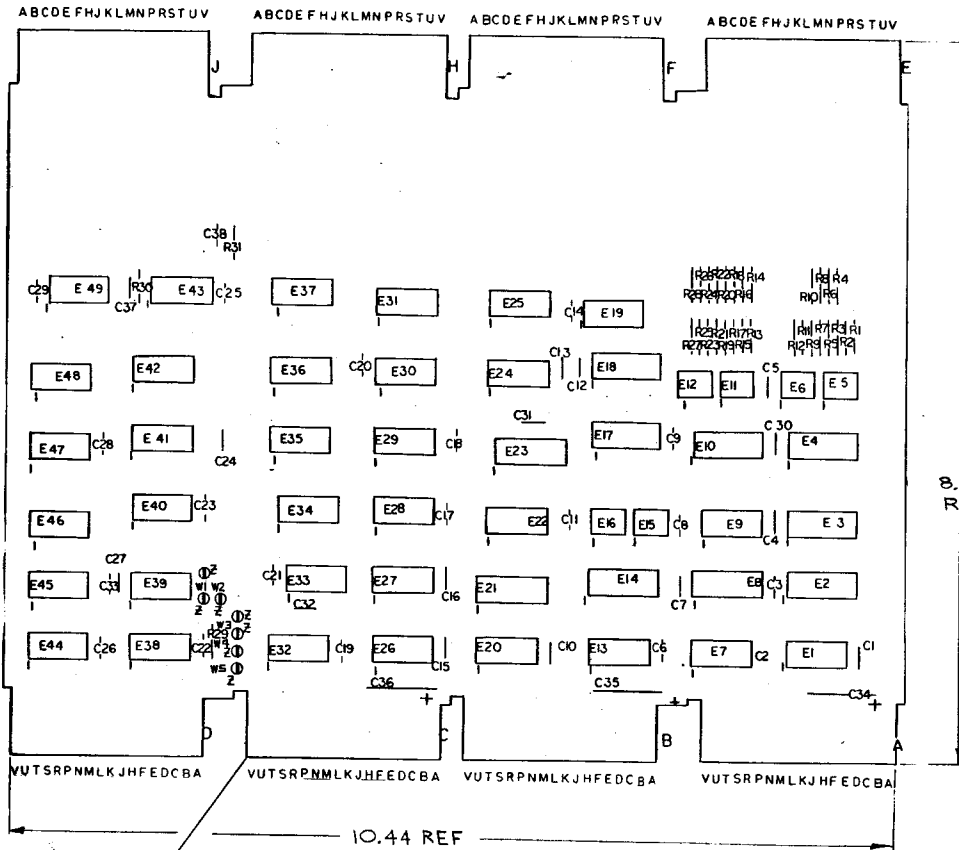

QTY	REF DESIGNATION	DESCRIPTION	PART NO.	ITEM NO.
7		SPLIT LUG	9006735	34
1	E46	I.C. DEC 7440	1905579	33
1	E10	I.C. DEC 74155	1910656	32
1	E23	I.C. DEC 74174	1910652	31
3	E8, E18, E21	I.C. DEC 74161	1910650	30
4	E5, E6, E15, E16	I.C. DEC 75452	1910645	29
2	E11, E12	I.C. DEC 75451	1910906	28
2	E8, E18	I.C. DEC 7496	1910363	27
3	E25, E38, E41	I.C. DEC 7408	1910155	26
1	E24	I.C. DEC 7486	1910011	25
6	E16, E20, E22, E38, E44	I.C. DEC 8881	1909705	24
2	E39, E45	I.C. DEC 74474	1909667	23
3	E3, E3, E17	I.C. DEC 8271	1909615	22
2	E42, E43	I.C. DEC 7404	1909686	21
1	E27	I.C. DEC 384	1909486	20
3	E13, E22, E32	I.C. DEC 380	1909485	19
1	E38	I.C. DEC 74411	1909267	18
1	E9	I.C. DEC 74452	1909061	17
1	E37	I.C. DEC 74410	1909057	16
2	E28, E47	I.C. DEC 7402	1909004	15
6	E19, E27, E31, E36, E40, E49	I.C. DEC 7400	1905575	14
3	E34, E35, E48	I.C. DEC 7474	1905547	13
14	R2, R5, R6, R9, R10, R12, R15, R16, R19, R20, R23, R24, R27, R28	RESISTOR, 100, 1/4W, 5%	1301322	12
1	R29	RESISTOR, 1K, 1/4W, 5%	1300365	11
14	R1, R3, R4, R7, R8, R11, R13, R14, R18, R18, R21, R22, R25, R26	RESISTOR, 390, 1/4W, 5%	1300309	10
2	R30, R31	RESISTOR, 100, 1/4W, 5%	1300229	9
32	C1 THRU C33	CAP, .01uF, 100V, 20% DISC	1001610	8
3	C34 THRU C36	CAP, 0.01uF, 35V, 20% STANT	1000067	7
1	C38	CAP, 500pF, 100V, 5% D.M.	1000025	6
1	C37	CAP, 970pF, 100V, 5% D.M.	1000024	5
1		ETCHED CIRCUIT BOARD	5010065	4
REF		MODULE ECO HISTORY	B-MH-M7105-4	3
REF		ASSY DRILLING HOLE LAYOUT	D-MH-M7105-5	2
REF		X-Y COORDINATE HOLE LOCATION	K-CO-M7105-1	1

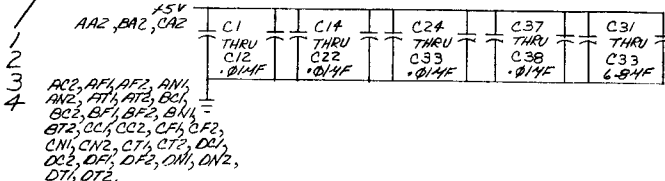

DEC FORM NO.	QTY	REF
DEC 74155	8	16
DEC 74174	8	16
DEC 74174	8	16
DEC 74161	8	16
DEC 75452	4	8
DEC 75451	4	8
DEC 8271	8	16
DEC 384	1	8
DEC 380	1	8
IC TYPE	GND	+5V

IC PIN LOCATIONS

GND AND 5V ARE USUALLY PIN 7 AND 14 RESPECTIVELY. EXCEPTIONS ARE STATED ABOVE.

FIRST USED ON OPTION MODEL

ETCH BOARD REV

DRN: [Signature] DATE: 8/3/78

CHKD: [Signature] DATE: 8/3/78

ENG: [Signature] DATE: 8/3/78

PROJ. ENG: [Signature] DATE: 8/3/78

PROD: [Signature] DATE: 8/3/78

NEXT HIGHER ASSY

digital EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

TITLE: MAJOR REGISTERS

SIZE CODE: DCS M7105-0-1

NUMBER: 1

REV: A

SCALE: 100%
SHEET 2 OF

SEMICONDUCTOR CONVERSION CHART


DEC NO. EIA NO. DEC NO. EIA NO.

SIZE CODE: DCS M7105-0-1

BRUNING 40-232 1649

DEC FORM NO. DHD-135A

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

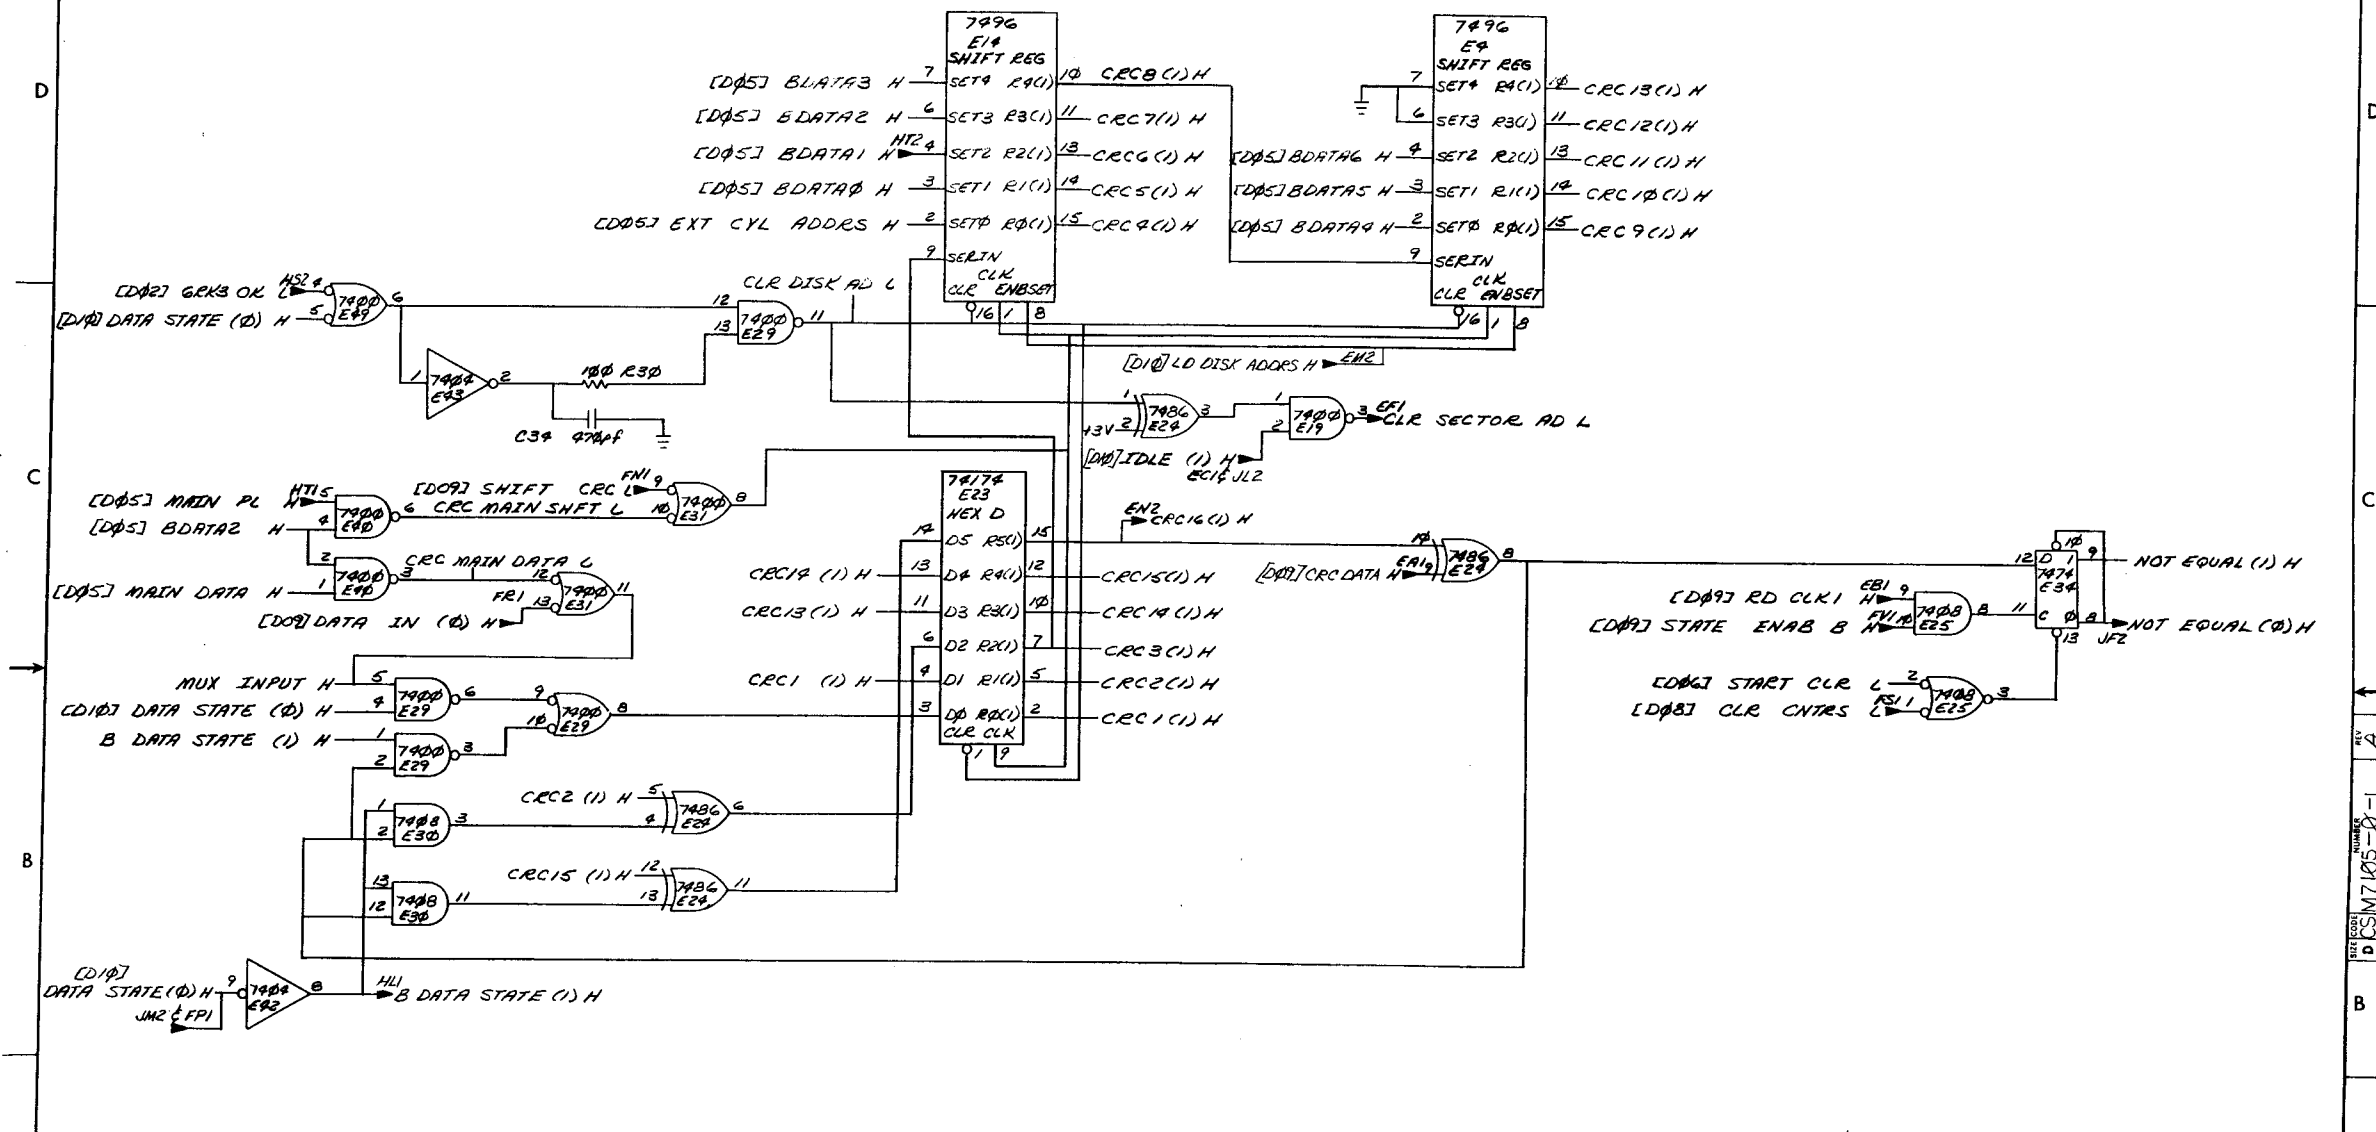


REV. 1
DATE 8-1-72
CHK. [Signature]
DEC FORM NO. ORD 102-B
DRAWING NO. 532 15840

(CRC/DISK ADDRESS REG)

FIRST USED ON OPTION/MODEL RK8-E	QTY.	DESCRIPTION	PART NO.	ITEM NO.
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRN <i>alibnt</i>	DATE 6/13/72	digital EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS	
DECIMALS	ANGLES	ENG. <i>Stinson</i>	DATE 11-2-72	TITLE (D04) MAJOR REGISTERS
.XXX - .005 .XX - .02 .X - .3		PROJ. ENG. <i>Stinson</i>	DATE 10/17/72	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		PROD. <i>W. J. Jones</i>	DATE 10/17/72	
MATERIAL	NEXT HIGHER ASSY.			D04
FINISH	D-UA-RK8-E-0	SIZE CODE	NUMBER	REV.
	SCALE	D	CS M7105-0-1	A
	SHEET 3 OF	DIST.		

REV. A
DRAWING NO. CS M7105-0-1

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

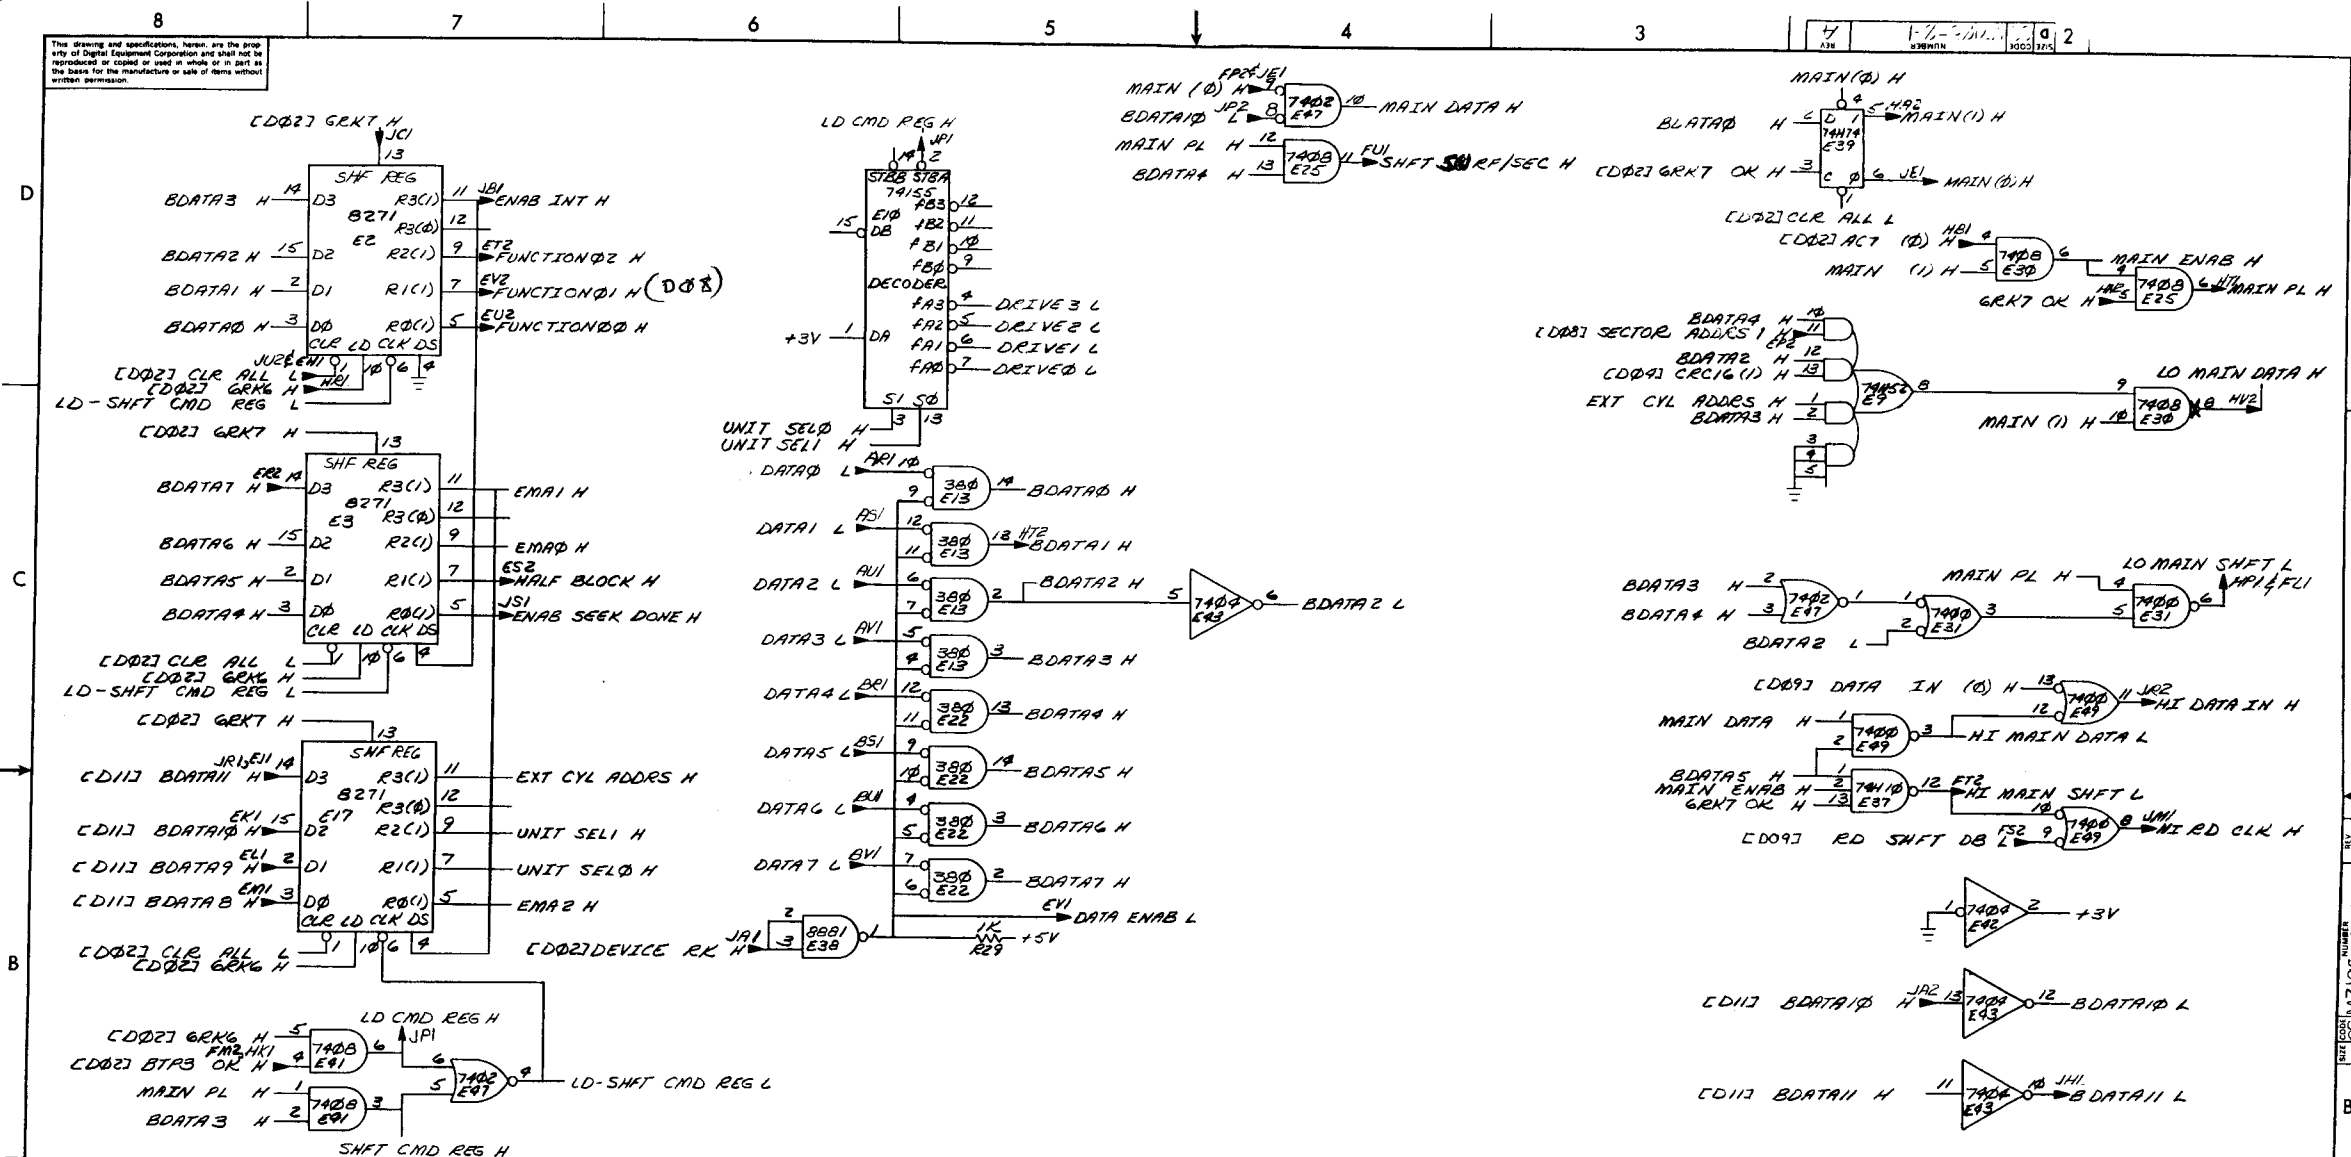


(COMMAND REG. MAINT. LOGIC)

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RKB-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRN W. J. W.	DATE 6-13-71	digital EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS TITLE (D05) MAJOR REGISTER	
DECIMALS	CHK'D J. J. W.	DATE 6-13-71		
ANGLES	ENG. J. J. W.	DATE 6-13-71		
.XXX - .006 .XX - .02 .X - .1	PROJ. ENG. J. J. W.	DATE 6-13-71		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY	PROD. J. J. W.	DATE 6-13-71		
MATERIAL	NEXT HIGHER ASSY.		SIZE CODE	NUMBER
	B-DD-RKB-0		D	CS M7105-0-1
FINISH	SCALE	SHEET	DIST	REV
	4 OF 6			A

BRUNING 65-522 15840
 REVISIONS
 CHANGE NO. REV. BY
 10K 3-1-72 P41
 DEF. FORM NO. DRD 102-B

PART NUMBER
 DCS M7105-0-1

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

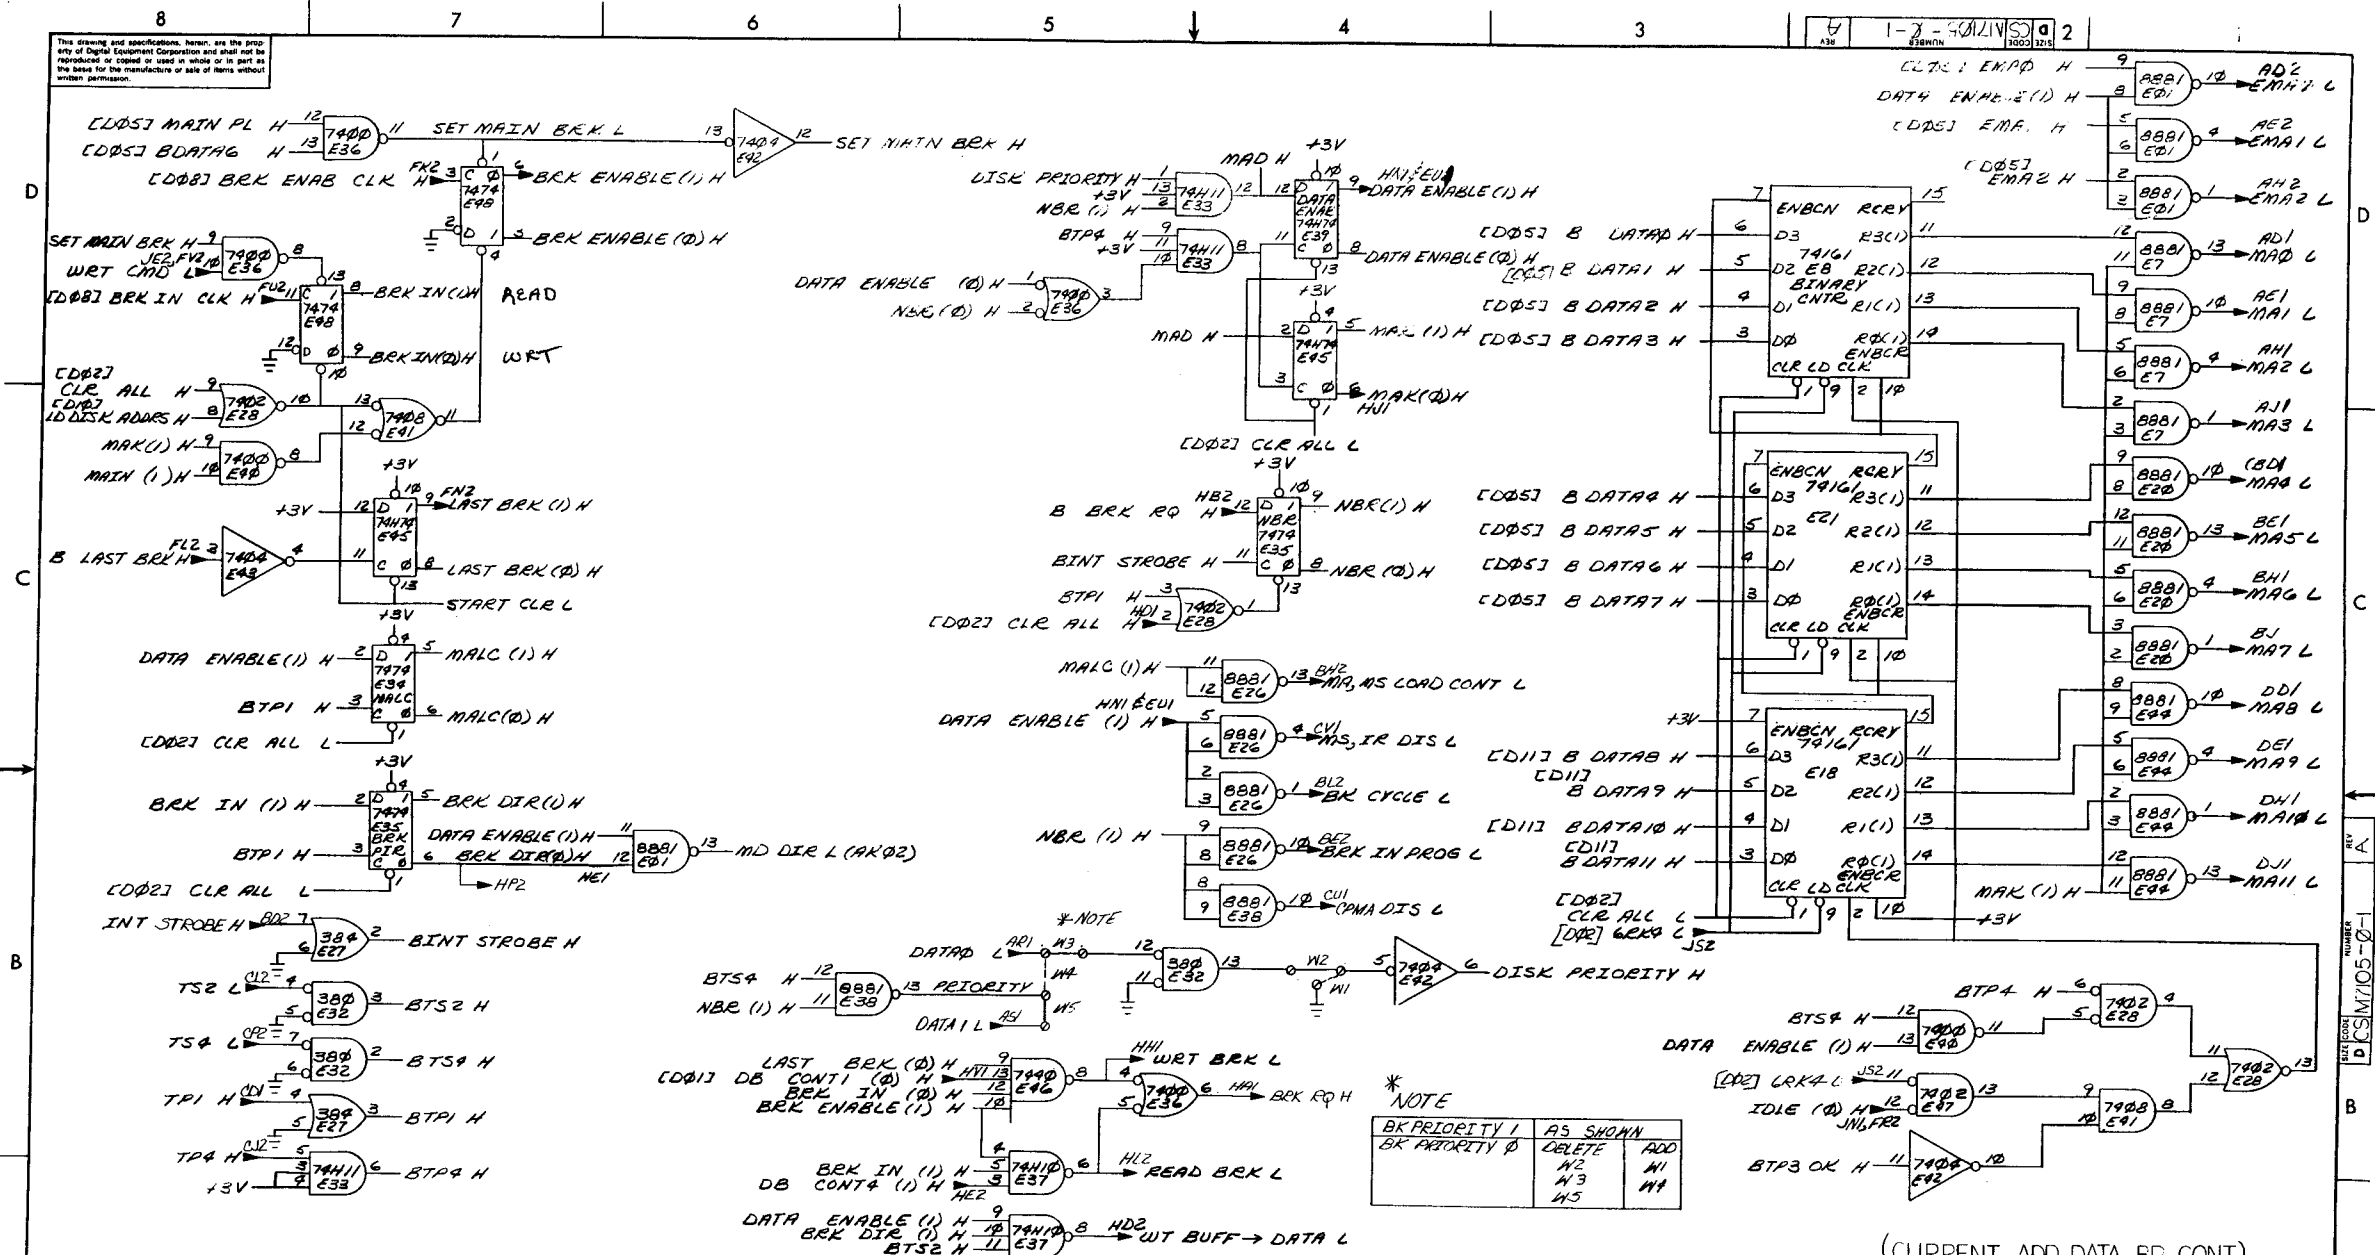

* NOTE

BK PRIORITY 1	AS SHOWN	ADD
BK PRIORITY 0	DELETE	W1
	W2	W3
	W4	W5



(CURRENT ADD DATA BR CONT.)

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED	DRN	DATE	digital EQUIPMENT CORPORATION	
TOLERANCES	CHK'D	DATE	MAYNARD MASSCHUSETTE	
DECIMALS	ENG	DATE	TITLE (D06)	
ANGLES	PROJ. ENG	DATE	MAJOR REGISTERS	
XXX - 005	PROD.	DATE		
.XX - 02				
X - 1				
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY				
MATERIAL	NEXT HIGHER ASSY.	SIZE CODE	NUMBER	REV.
++	B-DD-RK8-0	D	CSM7105-0-1	A
FINISH	SCALE	SHEET	5 OF	
++	5 OF	DIST.		

BRUNING 40-522 10840
 REVISIONS
 CHG. NO. 108-7-72
 DEC FORM NO. DRD 101-B

REV. A
 REV. B
 REV. C
 REV. D
 NUMBER
 DCSM7105-0-1

All drawings and specifications herein are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

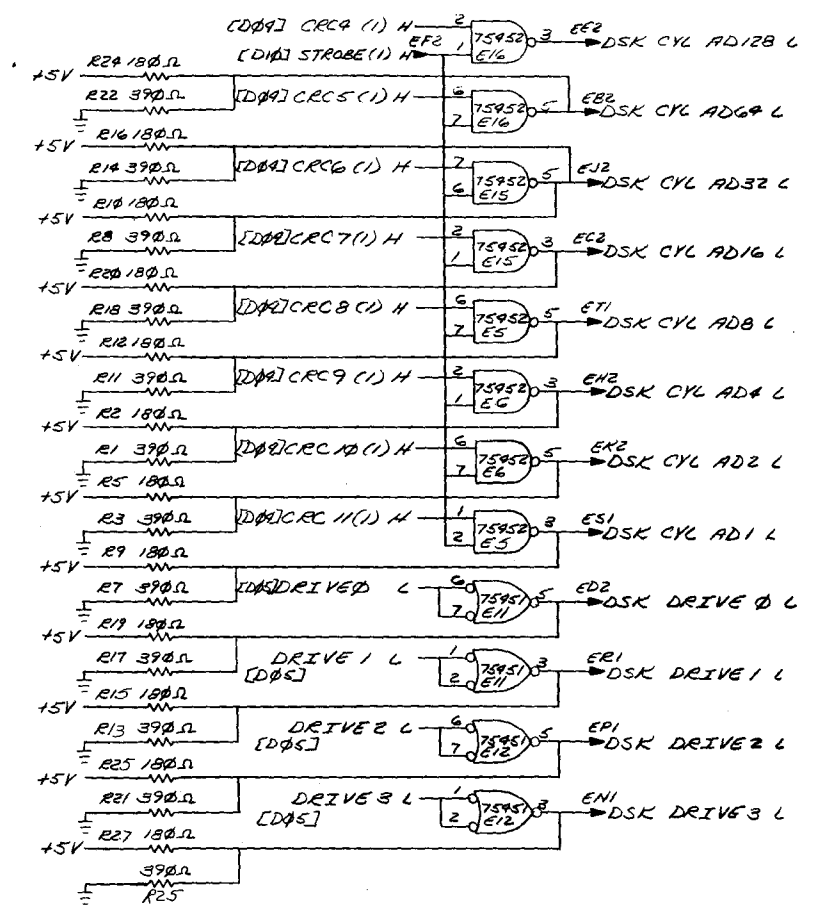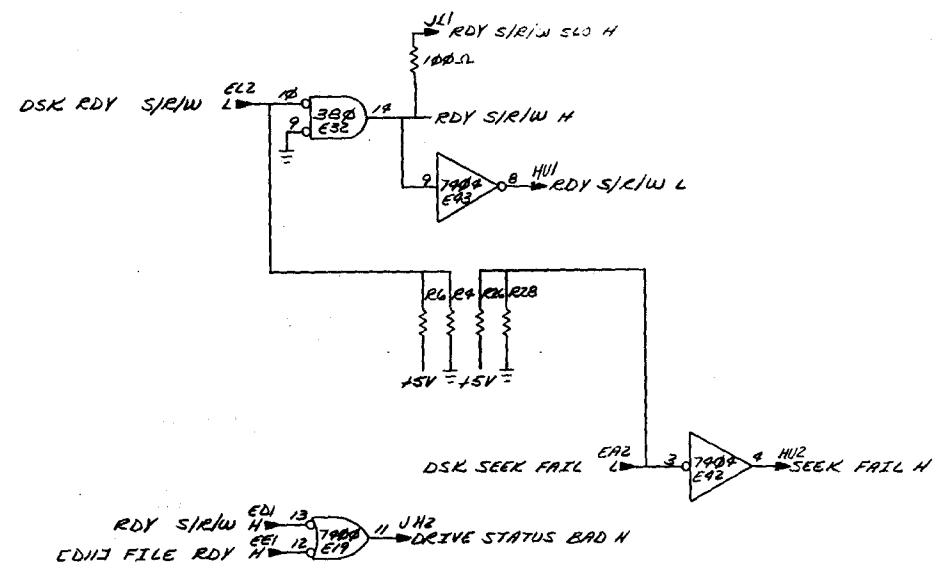

(DRIVE SIGNALS CABLE J1)


BRUNING 40-522 15840
 DEC FORM NO 1060 100-B
 REVISIONS
 CHANGE NO. 1 REV. 1/61
 C.K. Q.K. J.V. 1/61

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES.		DRN <i>Robert</i>	DATE <i>6-17-72</i>	 digital EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS
TOLERANCES		CHK'D <i>Robert</i>	DATE <i>6-17-72</i>	
DECIMALS	ANGLES	ENG <i>Robert</i>	DATE <i>6-17-72</i>	
XXX - .005	20' 30"	PROJ. ENG. <i>Robert</i>	DATE <i>6-17-72</i>	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		PROD. <i>Robert</i>	DATE <i>6-17-72</i>	TITLE (D07) MAJOR REGISTERS
MATERIAL		NEXT HIGHER ASSY.		SIZE CODE NUMBER REV
FINISH		B-DD-RK8-Ø		D/CS M7105-Ø-1 A
SCALE		SHEET 6 OF 6		DIST

PART NO. DCS M7105-Ø-1
 REV. A

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

NOTES:

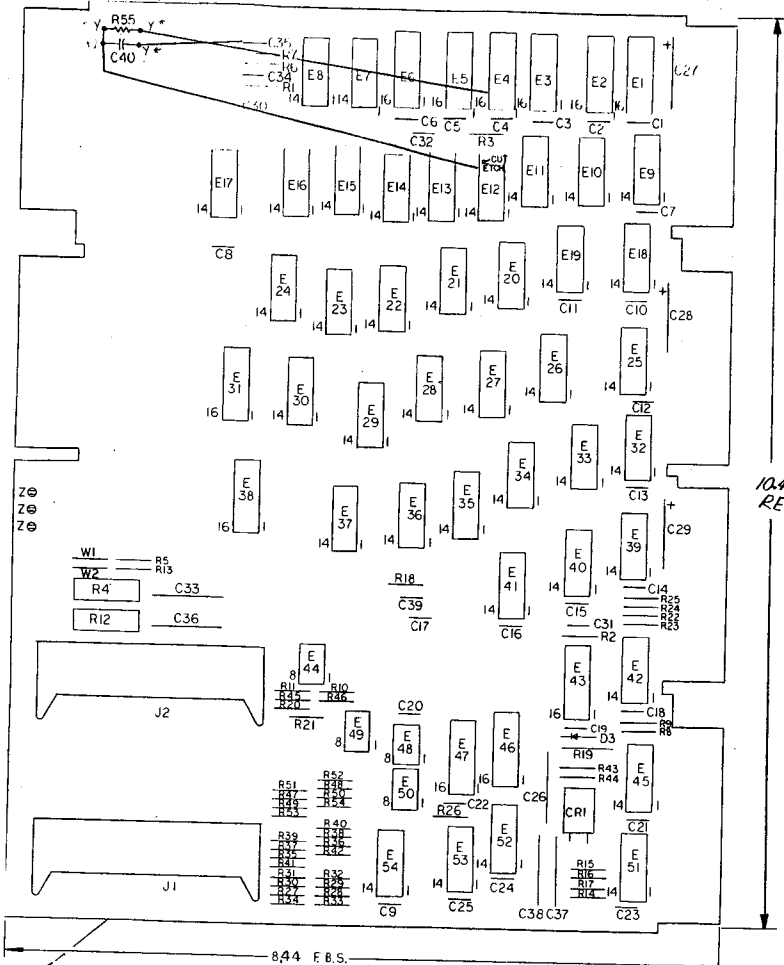


1	E46	I.C. TYPE 7496	1910363	41
1	E47	I.C. TYPE 7485	1910224	40
9	E15, E18 THRU E22, E24, E37, E41	I.C. TYPE 7474	1905597	39
1	E28	I.C. TYPE 74H52	1909061	38
1	E10	I.C. TYPE 74H10	1909057	37
2	E38, E39	I.C. TYPE 7410	1905576	36
2	E16, E32	I.C. TYPE 7408	1910155	35
5	E42, E51 THRU E54	I.C. TYPE 3000	1909485	34
2	E11, E7	I.C. TYPE 74N04	1909931	33
3	E9, E35, E36	I.C. TYPE 7404	1909686	32
6	E13, E23, C26, E28, C30, C40	I.C. TYPE 7402	1909004	31
8	E8, E12, E45, E25, E26, E33, E45	I.C. TYPE 7400	1905575	30
6	E1 THRU E6	I.C. TYPE 74161	1910650	29
4	E44, E48 THRU E50	I.C. TYPE 75452	1910645	28
1	C21	CRYSTAL, 2.88 MHz	1810694-3	27
2	R4, R12	POTENTIOMETER, 10K, 1/4W, 76A0	1309143-10	26
1	R19	RESISTOR, 200K, 1%, 1/4W, MF	1309418	25
6	R6, R9, R6, E7, E18, R55	RESISTOR, 100K, 5%, 1/4W, CC	1300229	24
1	R13	RESISTOR, 20K, 5%, 1/4W, CC	1302391	23
3	R5, R15, R17	RESISTOR, 10K, 5%, 1/4W, CC	1300879	22
1	R2	RESISTOR, 56K, 5%, 1/4W, CC	1301874	21
1	R44	RESISTOR, 3K, 5%, 1/4W, CC	1300432	20
4	R8, R9, R26, R43	RESISTOR, 1K, 5%, 1/4W, CC	1300365	19
2	R16, R10	RESISTOR, 470K, 5%, 1/4W, CC	1300316	18
17	R11, R20, R23, R25, R27, R28, R31, R33, R35, R37, R38, R41, R42, R43, R45, R51, R53	RESISTOR, 370K, 5%, 1/4W, CC	1300309	17
17	R14, R21, R22, R24, R28, R29, R32, R34, R36, R38, R40, R42, R44, R46, R48, R50, R52, R54	RESISTOR, 100K, 5%, 1/4W, CC	1301322	16
1	D3	DIODE D664	1100114	15
2	C33, C36	CAPACITOR, .022UF, 100V, 5%, NYLAC	1002323	14
3	C37, C38, C26	CAPACITOR, 470PF, 100V, 5%, NYLAC	1009312	13
1	C31	CAPACITOR, 100PF, 100V, 5%, DM	1000006	12
1	C32	CAPACITOR, 500PF, 100V, 5%, DM	1000027	11
2	C34, C39	CAPACITOR, 500PF, 100V, 5%, DM	1000025	10
1	C35	CAPACITOR, 330PF, 100V, 5%, DM	1000023	9
1	C30	CAPACITOR, 100PF, 100V, 5%, DM	1000020	8
3	C27 THRU C29	CAPACITOR, 6.2UF, 35V, 20%, TANT	1000067	7
25	C1 THRU C25	CAPACITOR, .01UF, 100V, 20%, DISC	1001610	6
3	TP1 THRU TP3	SPLIT LUG	900735	5
1		ETCHED CIRCUIT BOARD	5010066	4
1		MODULE ECO HISTORY	B-NH-M746-0-3	3
1		ASSY DRILLING HOLE LAYOUT	D-NH-M746-0-3	2
1		X-Y COORDINATE HOLE LOCATION	K-00-M746-0-4	1

1	C40	CAPACITOR 470PF, 100V, 5%	1000024	48
AR		#30AWG WIRE, SOLID GREEN	9105740-55	47
4		GRIPLETS	1210244-0	46
AW	W1, W2	INSULATED JUMPER	9009185	45
2	J1, J2	CONN. 40 RT ANGLE	1209941	44 REF
1	E31	I.C. TYPE 74155	1910656	43 REF
2	E38, E43	I.C. TYPE 74123	1910436	42 REF

DEC 390	1	8
DEC 7485	8	16
DEC 7496	5	12
DEC 74155	8	16
DEC 74161	8	16
IC TYPE	GND	+5V
GND AND 5V ARE USUALLY PIN 7 AND 14 RESPECTIVELY EXCEPTS ARE STATED ABOVE		
IC PIN LOCATIONS		

QTY	REF DESIGNATION	DESCRIPTION	PART NO.	ITEM NO.
FIRST USED ON OPTION MODEL				
RKB - E				
ETCH BOARD REV B				
PARTS LIST				
DRN	DATE	digital EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS		
CHKD	DATE	TITLE		
ENG	DATE	CONTROL, RKB-E		
PROJ. ENG.	DATE	NEXT HIGHER ASSY		
PROD.	DATE	D-UA-RKB-E-0		
DEC NO.	EIA NO.	DEC NO.	EIA NO.	SCALE
		D664	IN3606	SCALE 1:1
SEMICONDUCTOR CONVERSION CHART				
SHEET	2	OF		

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

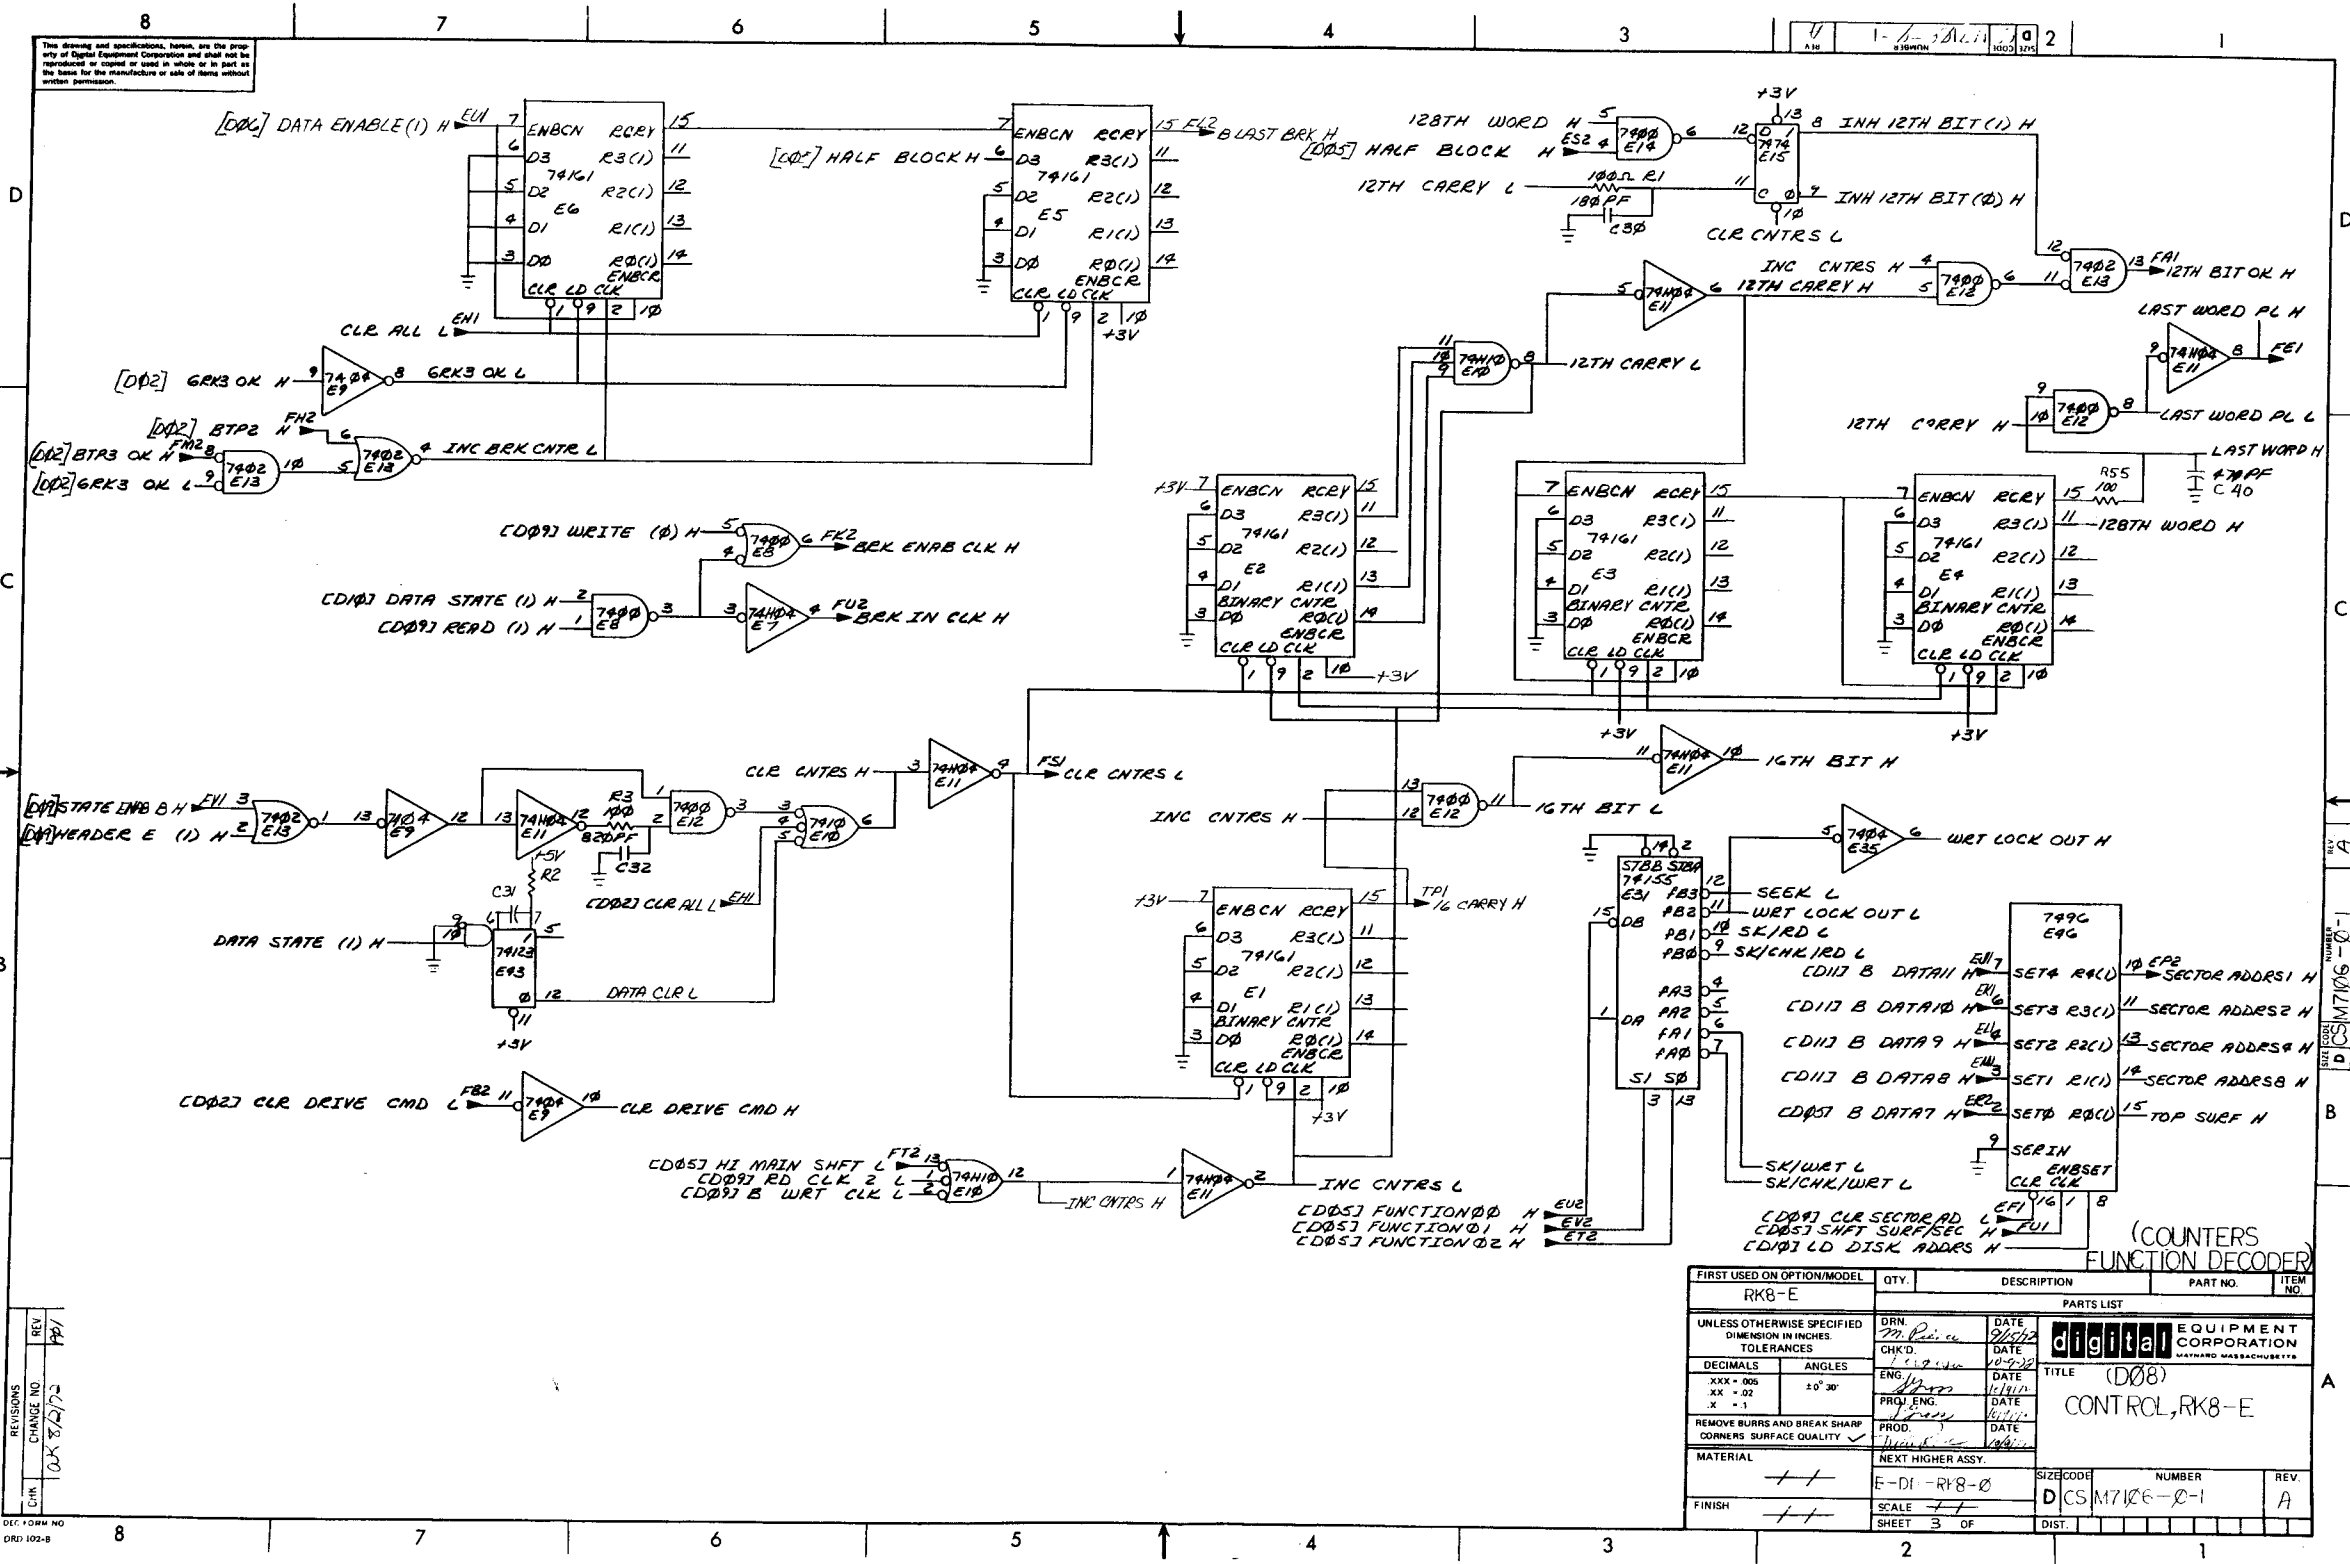


FIRST USED ON OPTION/MODEL	QTY	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES. TOLERANCES				
DECIMALS	ANGLES	PARTS LIST		
XXX - 005	XX - 02	DRN	DATE	digital EQUIPMENT CORPORATION MILFORD, MASSACHUSETTS
XX - 01	X - 01	CHK'D	DATE	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		ENG	DATE	TITLE (D08) CONTROL, RK8-E
		PROJ ENG	DATE	
MATERIAL	NEXT HIGHER ASSY.	PROD.	DATE	
FINISH	E-DI - RY8-0	SCALE	SHEET 3 OF	REV A

BRUHLING 40-532 15840
DEC 1980M NO
DRD 102-B

REV A
NUMBER 0-1
D CS M7106-0-1

This drawing and specifications herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

1-0-7121 2

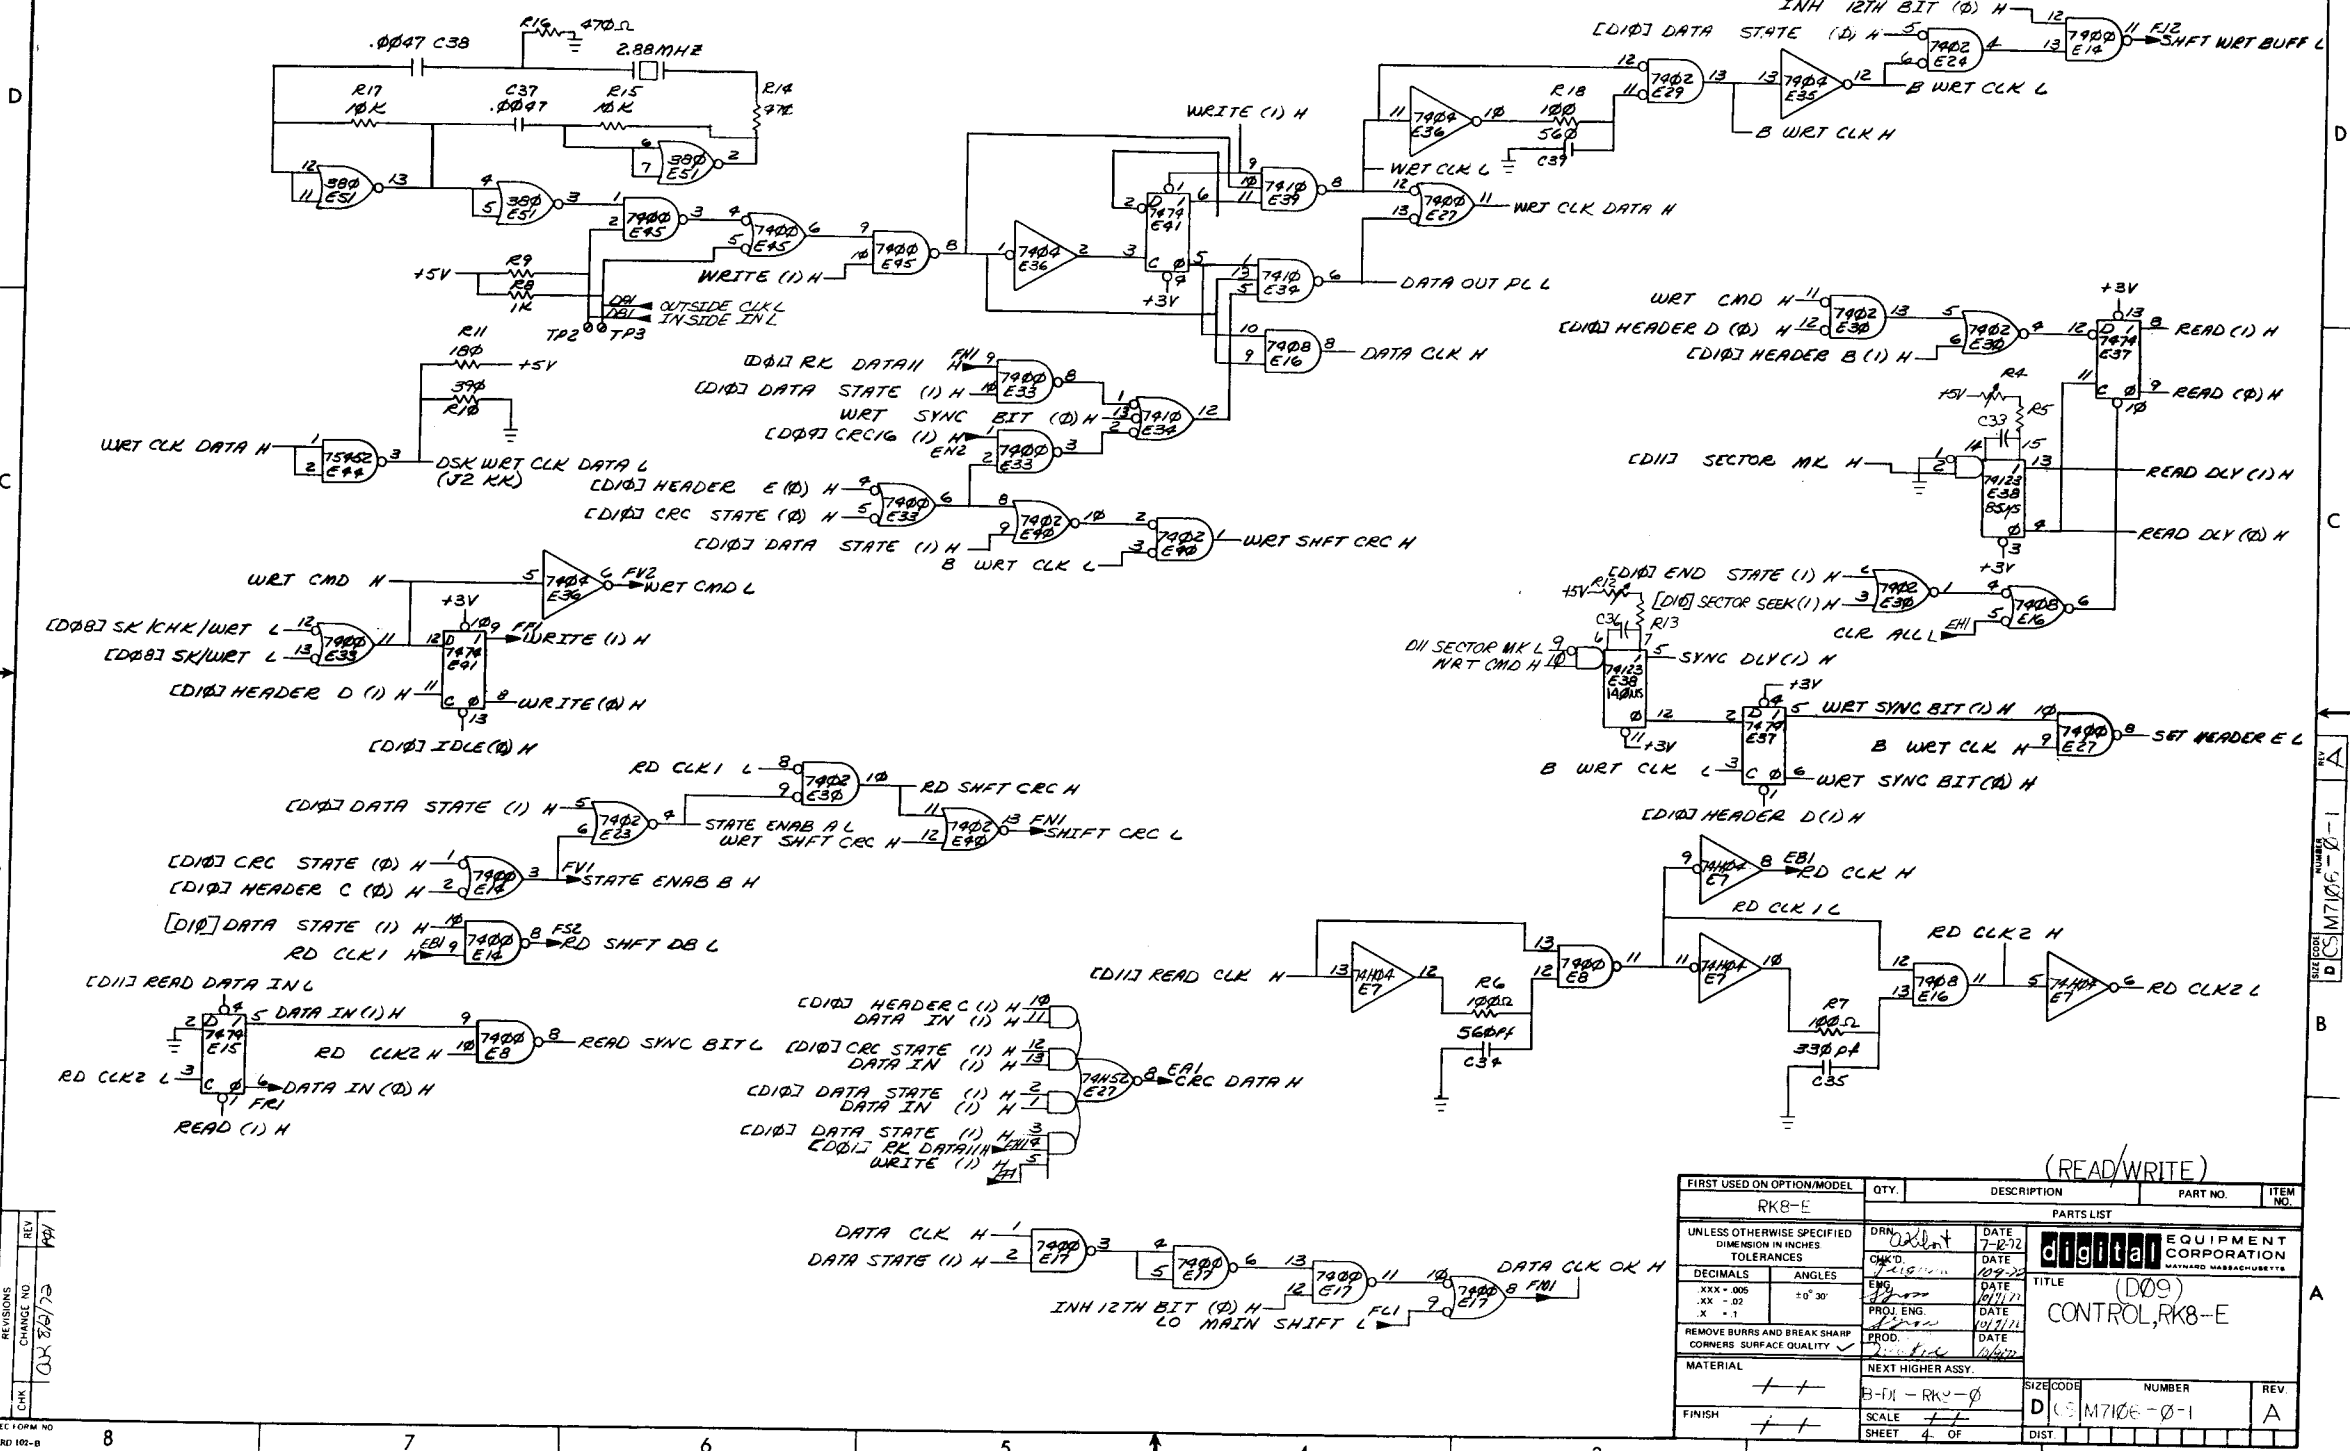

BRUING 4032Z 1840
 DEC FORM NO. DRD 102-B


FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES				
TOLERANCES		DATE 7-12-72		
DECIMALS	ANGLES	CHK'D DATE 10-2-72		
XXX - .006	° 0' 30"	ENG DATE 10/11/72		
.XX - .02		PROJ. ENG. DATE 11/11/72		
X - .1		PROD. DATE 11/11/72		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY				
MATERIAL NEXT HIGHER ASSY.				
FINISH				
SCALE		SIZE CODE		
SHEET 4 OF		NUMBER		
		REV.		
		DIST.		

(READ/WRITE)

TITLE CONTROL, RK8-E
 DATE 7-12-72
 CHK'D 10-2-72
 ENG 10/11/72
 PROJ. ENG. 11/11/72
 PROD. 11/11/72

SIZE CODE D
 NUMBER CS M7106-0-1
 REV. A

This drawing and specifications herein are the property of Digital Equipment Corporation and shall not be reproduced or copied in whole or in part to be used in the manufacture or sale of items without written permission.

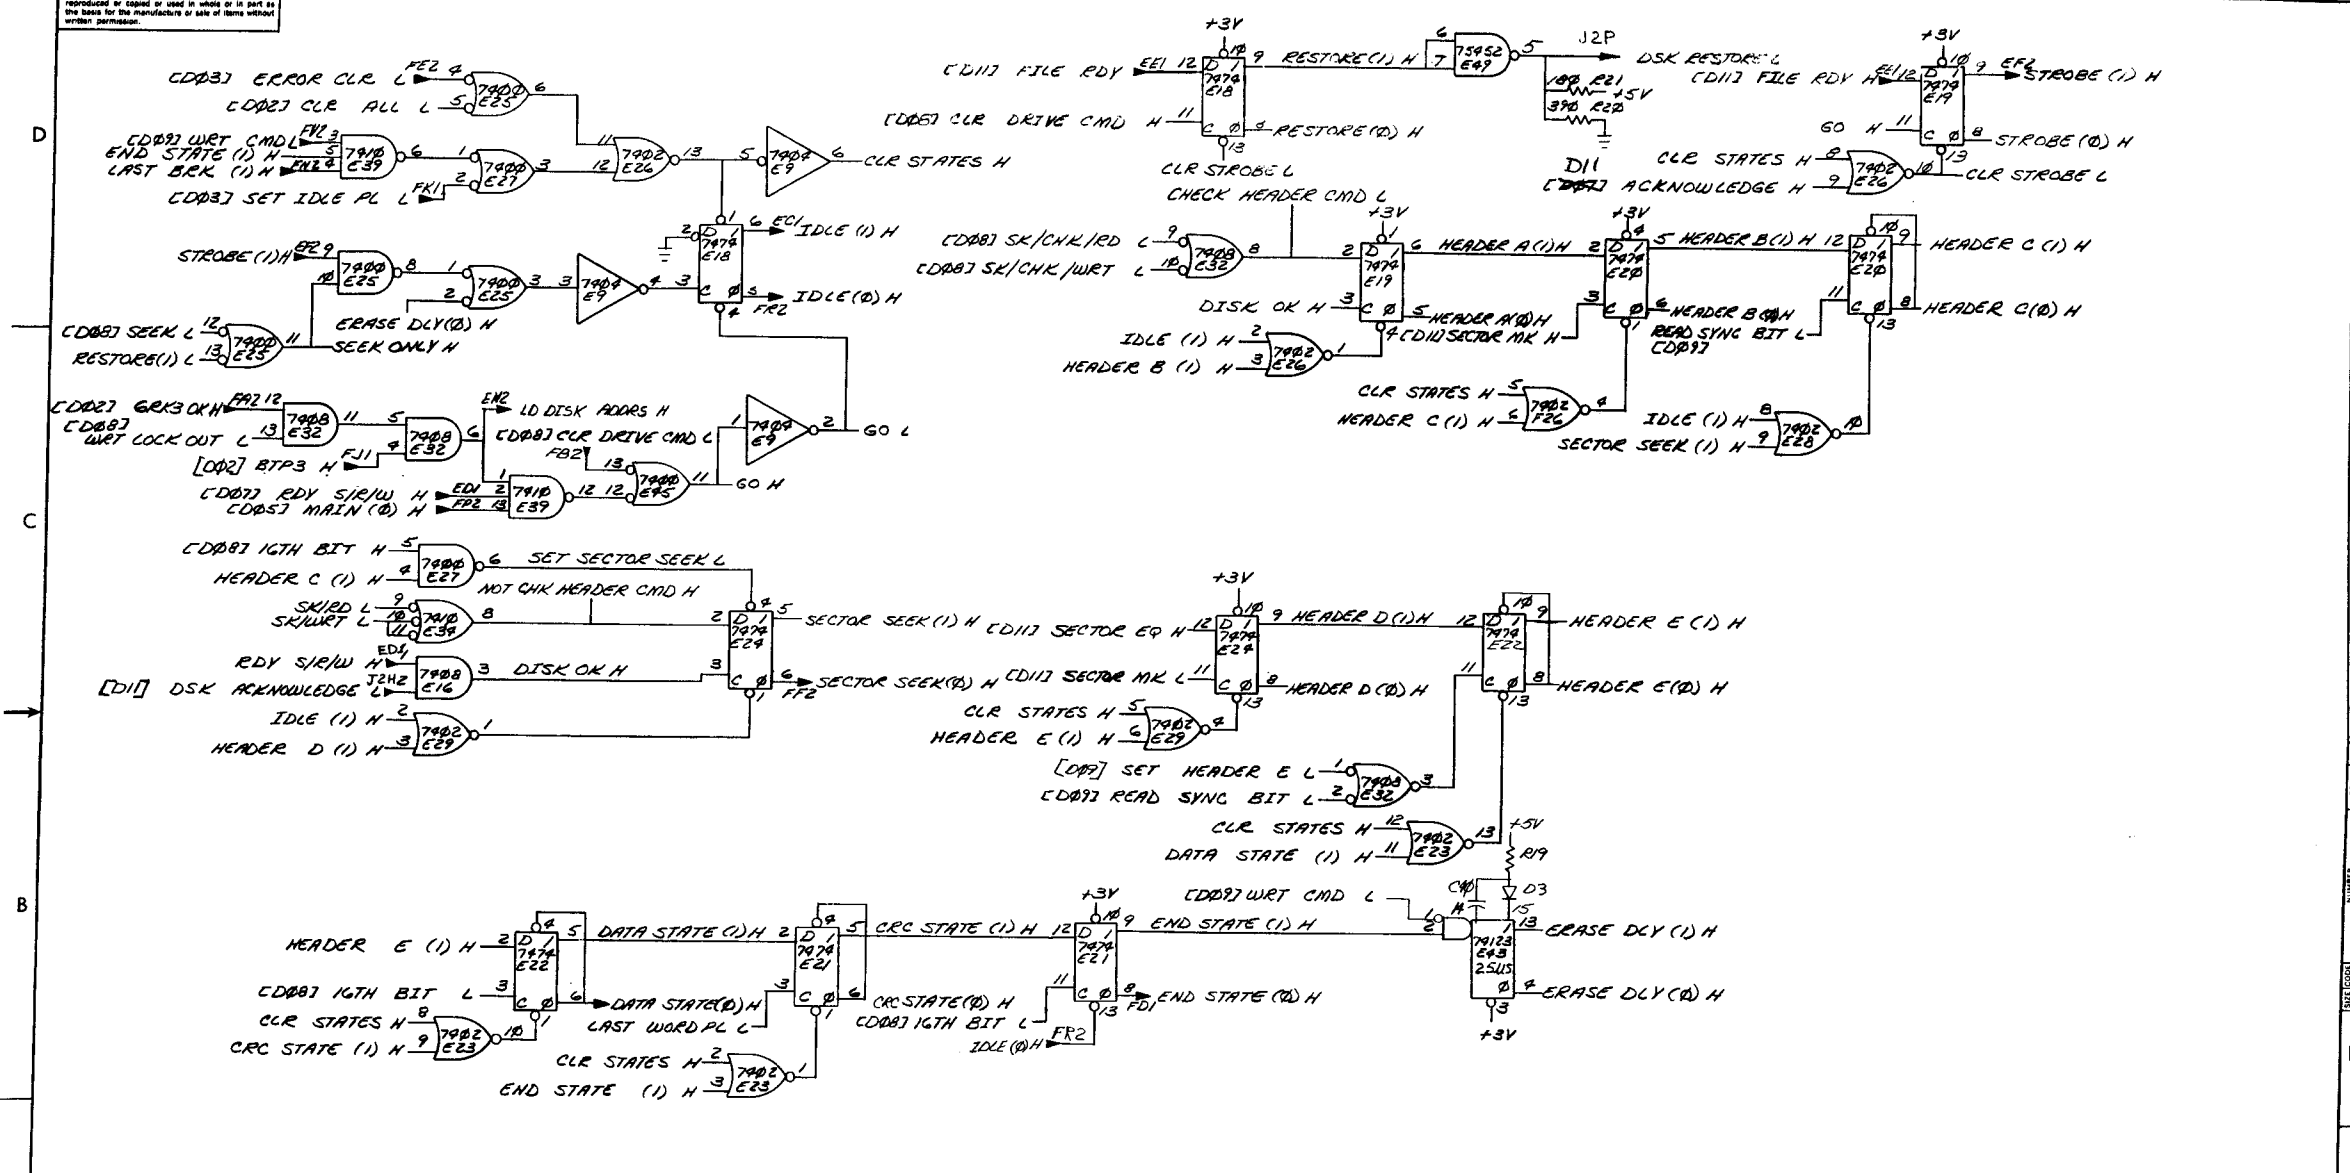



REV. NO. 1
REV. NO. 2
REV. NO. 3
REV. NO. 4
REV. NO. 5
REV. NO. 6
REV. NO. 7
REV. NO. 8
REV. NO. 9
REV. NO. 10
REV. NO. 11
REV. NO. 12
REV. NO. 13
REV. NO. 14
REV. NO. 15
REV. NO. 16
REV. NO. 17
REV. NO. 18
REV. NO. 19
REV. NO. 20
REV. NO. 21
REV. NO. 22
REV. NO. 23
REV. NO. 24
REV. NO. 25
REV. NO. 26
REV. NO. 27
REV. NO. 28
REV. NO. 29
REV. NO. 30
REV. NO. 31
REV. NO. 32
REV. NO. 33
REV. NO. 34
REV. NO. 35
REV. NO. 36
REV. NO. 37
REV. NO. 38
REV. NO. 39
REV. NO. 40
REV. NO. 41
REV. NO. 42
REV. NO. 43
REV. NO. 44
REV. NO. 45
REV. NO. 46
REV. NO. 47
REV. NO. 48
REV. NO. 49
REV. NO. 50
REV. NO. 51
REV. NO. 52
REV. NO. 53
REV. NO. 54
REV. NO. 55
REV. NO. 56
REV. NO. 57
REV. NO. 58
REV. NO. 59
REV. NO. 60
REV. NO. 61
REV. NO. 62
REV. NO. 63
REV. NO. 64
REV. NO. 65
REV. NO. 66
REV. NO. 67
REV. NO. 68
REV. NO. 69
REV. NO. 70
REV. NO. 71
REV. NO. 72
REV. NO. 73
REV. NO. 74
REV. NO. 75
REV. NO. 76
REV. NO. 77
REV. NO. 78
REV. NO. 79
REV. NO. 80
REV. NO. 81
REV. NO. 82
REV. NO. 83
REV. NO. 84
REV. NO. 85
REV. NO. 86
REV. NO. 87
REV. NO. 88
REV. NO. 89
REV. NO. 90
REV. NO. 91
REV. NO. 92
REV. NO. 93
REV. NO. 94
REV. NO. 95
REV. NO. 96
REV. NO. 97
REV. NO. 98
REV. NO. 99
REV. NO. 100

(MAJOR STATES)

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E				
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRAWN: <i>advent</i>	DATE: 7-14-72	DIGITAL EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS	
DECIMALS	CHK'D: <i>[Signature]</i>	DATE: 10-4-72		
ANGLES	ENG: <i>[Signature]</i>	DATE: 10-4-72	TITLE (D10) CONTROL, RK8-E	
20° 30'	PROJ. ENG: <i>[Signature]</i>	DATE: 10-4-72		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY	PROD. <i>[Signature]</i>	DATE: 10-4-72	MATERIAL NEXT HIGHER ASSY.	
FINISH	B-DI-RK8-2	SIZE CODE	NUMBER	REV.
	SCALE	DCS	M7106-2-1	A
	SHEET 5 OF	DIST		

REV. NO. 1
REV. NO. 2
REV. NO. 3
REV. NO. 4
REV. NO. 5
REV. NO. 6
REV. NO. 7
REV. NO. 8
REV. NO. 9
REV. NO. 10
REV. NO. 11
REV. NO. 12
REV. NO. 13
REV. NO. 14
REV. NO. 15
REV. NO. 16
REV. NO. 17
REV. NO. 18
REV. NO. 19
REV. NO. 20
REV. NO. 21
REV. NO. 22
REV. NO. 23
REV. NO. 24
REV. NO. 25
REV. NO. 26
REV. NO. 27
REV. NO. 28
REV. NO. 29
REV. NO. 30
REV. NO. 31
REV. NO. 32
REV. NO. 33
REV. NO. 34
REV. NO. 35
REV. NO. 36
REV. NO. 37
REV. NO. 38
REV. NO. 39
REV. NO. 40
REV. NO. 41
REV. NO. 42
REV. NO. 43
REV. NO. 44
REV. NO. 45
REV. NO. 46
REV. NO. 47
REV. NO. 48
REV. NO. 49
REV. NO. 50
REV. NO. 51
REV. NO. 52
REV. NO. 53
REV. NO. 54
REV. NO. 55
REV. NO. 56
REV. NO. 57
REV. NO. 58
REV. NO. 59
REV. NO. 60
REV. NO. 61
REV. NO. 62
REV. NO. 63
REV. NO. 64
REV. NO. 65
REV. NO. 66
REV. NO. 67
REV. NO. 68
REV. NO. 69
REV. NO. 70
REV. NO. 71
REV. NO. 72
REV. NO. 73
REV. NO. 74
REV. NO. 75
REV. NO. 76
REV. NO. 77
REV. NO. 78
REV. NO. 79
REV. NO. 80
REV. NO. 81
REV. NO. 82
REV. NO. 83
REV. NO. 84
REV. NO. 85
REV. NO. 86
REV. NO. 87
REV. NO. 88
REV. NO. 89
REV. NO. 90
REV. NO. 91
REV. NO. 92
REV. NO. 93
REV. NO. 94
REV. NO. 95
REV. NO. 96
REV. NO. 97
REV. NO. 98
REV. NO. 99
REV. NO. 100

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

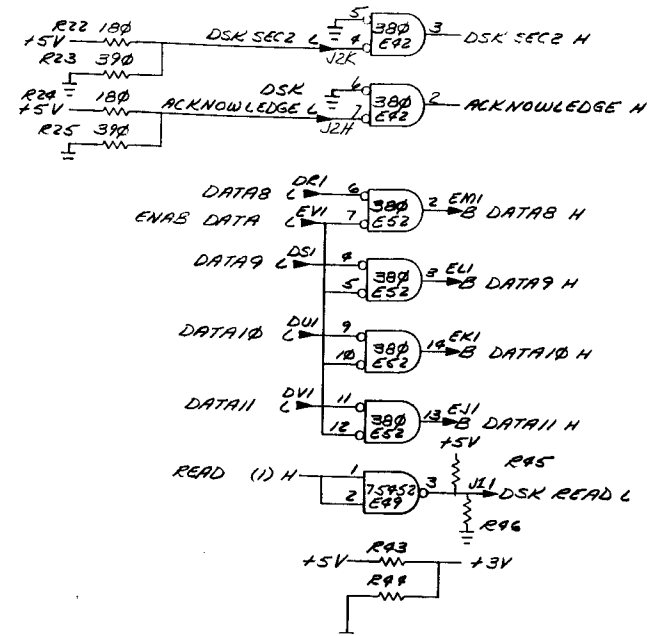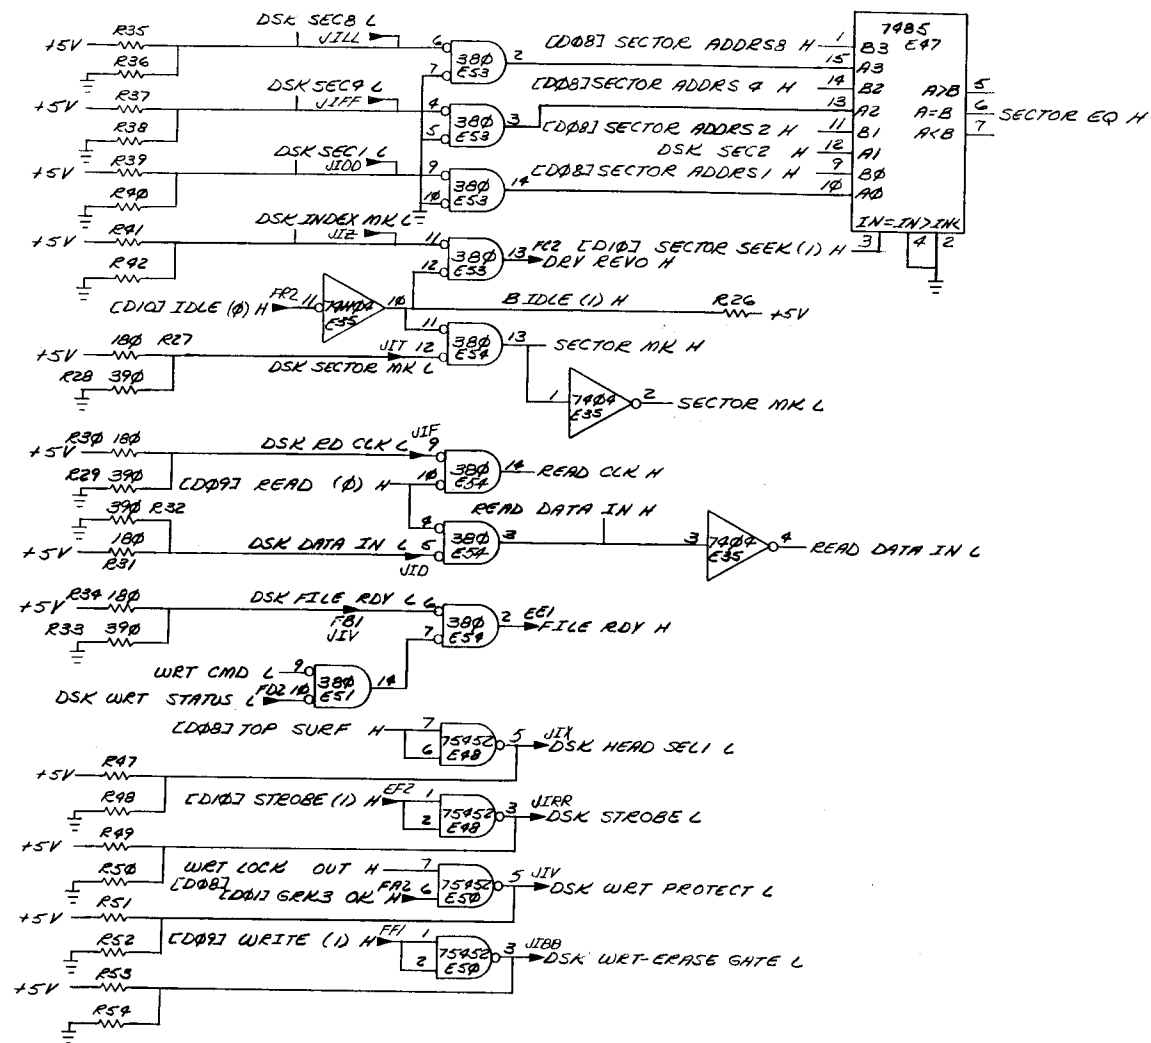

J2

UU	DSK CYL ADB L	E71
SS	DSK CYL AD2 L	E72
PP	DSK CYL AD3 L	E73
MM	DSK CYL AD16 L	E74
KK	DSK WRT CLK DATA L	E44-3
HH	DSK CYL AD12A L	E75
EE	DSK RDY SIR/W L	E76
CC	DSK CYL AD 32 L	E77
AA	DSK DRIVE 0 L	E78
Y	DSK CYL AD1 L	E79
W	DSK DRIVE 1 L	E80
U	DSK CYL AD4 L	E81
S	DSK DRIVE 2 L	E82
P	DSK RESTORE L	E83
M	DSK DRIVE 3 L	E84-5
K	DSK SEC 2 L	E85
H	DSK ACKNOWLEDGE L	E86-4
E	DSK SEEK FAIL L	E87-7
C	DSK CAPACITY EX L	E88

J1

D	DSK DATA IN L	E54-5
F	DSK RD CLK L	E54-9
V	DSK WRT PROTECT L	E54-9
L	DSK READ L	E54-5
R	DSK WRT STATUS L	E49-3
T	DSK SECTOR MK L	F02
Y	DSK FILE RDY L	E54-6
X	DSK HEAD SEL L	E48-5
BB	DSK INDEX MK L	E53-11
DD	DSK SEC 1 L	E53-3
FF	DSK SEC 4 L	E53-9
LL	DSK SEC 8 L	E53-4
RR	DSK STROBE L	E48-3



(DRIVE SIGNALS CABLE J2 DRIVERS)

FIRST USED ON OPTION/MODEL	QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E		PARTS LIST		
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRN: <i>awb</i>	DATE: 7-19-72	digital EQUIPMENT CORPORATION	
DECIMALS	CHK'D: <i>awb</i>	DATE: 7-19-72	MAYHARD MASSACHUSETTS	
ANGLES	ENG: <i>awb</i>	DATE: 7-19-72	TITLE: (DIP) CONTROL, RK8-E	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY	PROJ. ENG: <i>awb</i>	DATE: 7-19-72		
MATERIAL	PROD.:	DATE:	NEXT HIGHER ASSY:	
FINISH	B-12-RK8-R	SCALE: 1/16"	SIZE CODE: D	NUMBER: CS M7106-0-1
	SHEET 6 OF	DIST.:		REV: A

BRILLING 40-322 18460
 DEC 1 FORM NO. DRD 102-B
 REVISIONS
 CHANGE NO. 001 3/16/72
 CHK. *awb*

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

NOTES:
 1. CABLE TO BE WIRED WITH GROOVE SIDE UP.
 2. WHEN ATTACHING CONN (ITEM #2) TO CABLE (ITEM #3) USE SCOTCHFLEX LOCATOR PLATE # 3443-24 AND SCOTCHFLEX ASSY. PRESS # 344-5 FROM 3M COMPANY.
 3. TAPE CABLE ≈ EVERY 1.5 FEET.

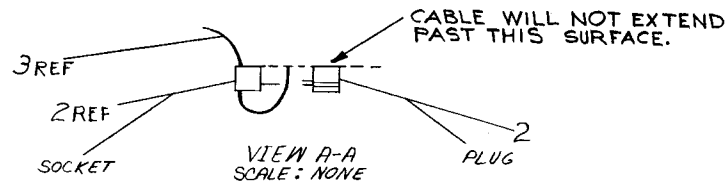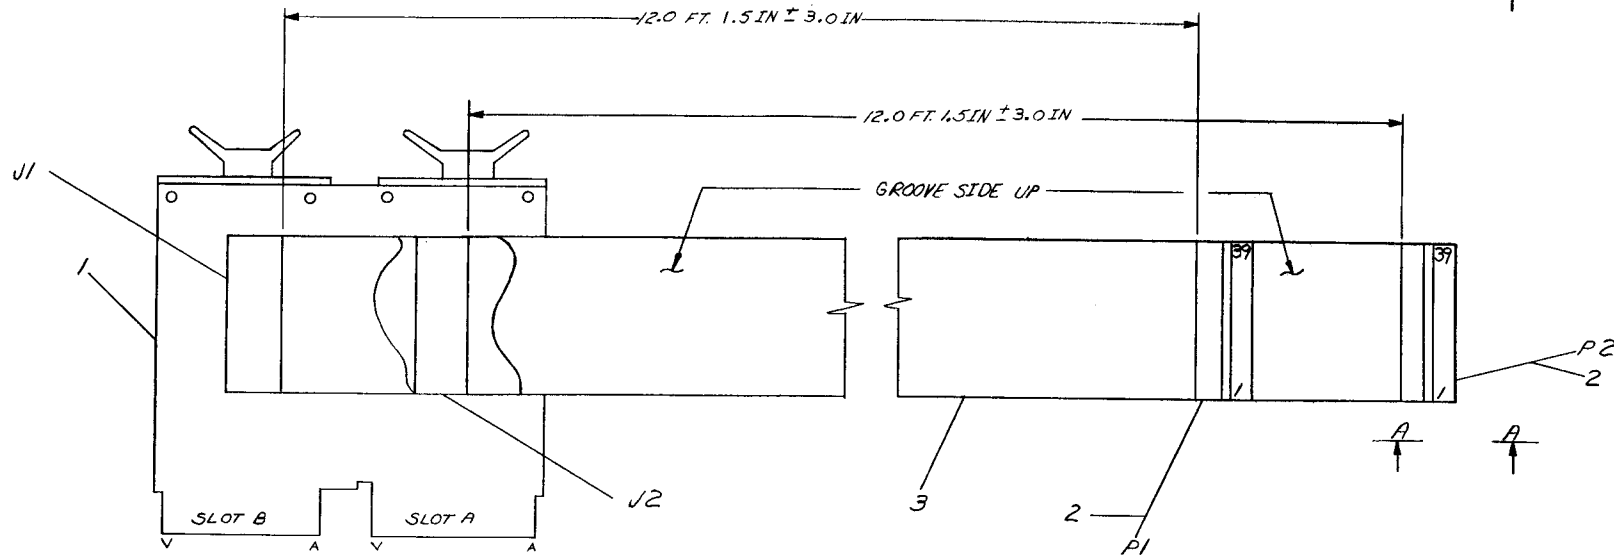

A/R	TAPE, ELECTRICAL WHI	9008880	4
2	CABLE 40 CONDUCTOR 30 ANG	910777-01	3
2	SCOTCHFLEX CONN #3443-24	12/1206	2
1	RK8-E CONTROL CABLE MOD. CS-1433-A-1		1

FIRST USED ON OPTION/MODEL		PARTS LIST	
QTY.	DESCRIPTION	PART NO.	ITEM NO.
RK8-E			
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES. TOLERANCES			
DRN. <i>M. B. R.</i>	DATE <i>8/1/72</i>	digital EQUIPMENT CORPORATION MAYNARD MASSACHUSETTS	
CHK'D.	DATE		
DECIMALS	ANGLES	ENG. <i>[Signature]</i>	DATE <i>8/1/72</i>
.XXX - .005	± 0° 30'	PROJ. ENG.	DATE
.XX - .02		PROD.	DATE
.X - .1		<i>R. K. Sullivan</i>	<i>8-13-72</i>
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓		NEXT HIGHER ASSY.	
MATERIAL	D-UA-RK8-E-Ø		SIZE CODE
FINISH	SCALE <i>NONE</i>		NUMBER
	SHEET 1 OF 2		REV.


TITLE
 CONTROL CABLE
 ASSY

DIST. **D** AD 7009026-0-0

BRUNING 40-107 15848
 REVISIONS
 CHANGE NO.
 REV.

REV. NUMBER
D AD 7009026-0-0

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

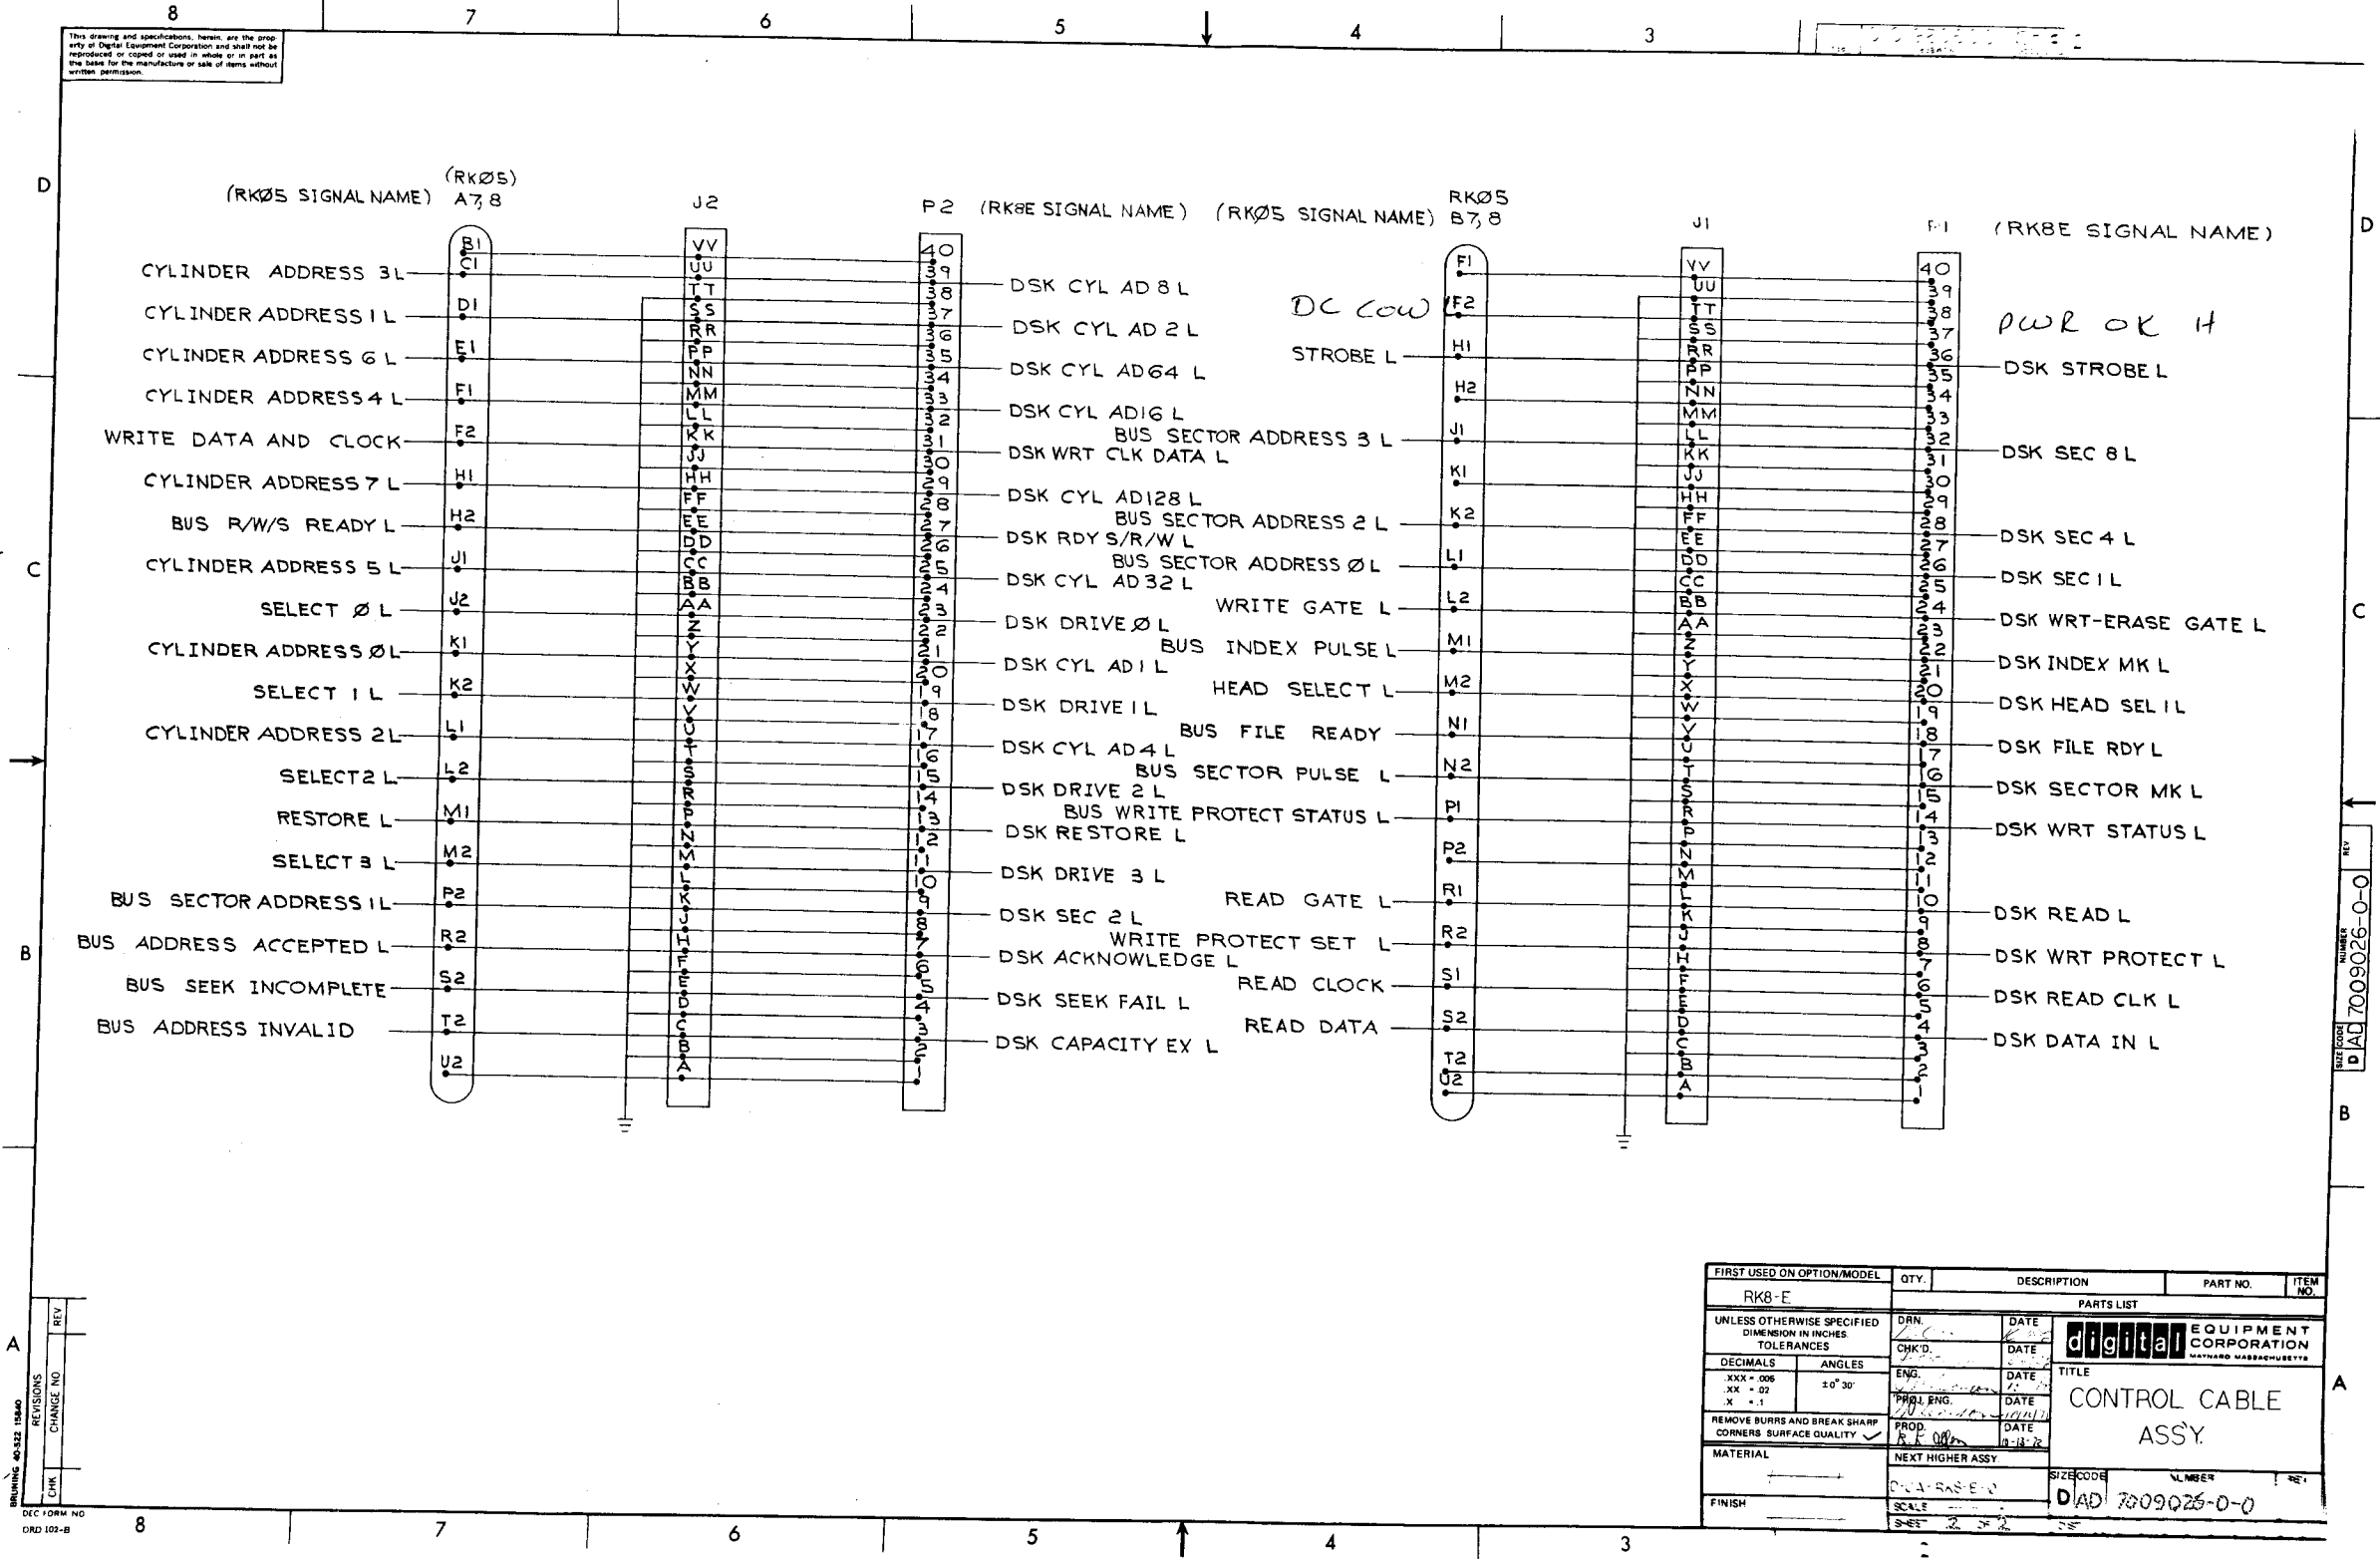

BRUNING 40-522 15840
 DEC FORM NO
 ORD 102-B



REV	
CHANGE NO	
LINK	

REV
 NUMBER
 D IAD 7009026-0-0

FIRST USED ON OPTION/MODEL RKØ-E	QTY.	DESCRIPTION	PART NO.	ITEM NO.
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES		PARTS LIST		
DECIMALS	ANGLES	DRN	DATE	 digital EQUIPMENT CORPORATION <small>MAYNARD MASSACHUSETTS</small>
.XXX ± .006	20° 30'	CHK'D	DATE	
.XX ± .02		ENG.	DATE	
.X ± .1		PRJL ENG.	DATE	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		PROD.	DATE	TITLE CONTROL CABLE ASSY.
MATERIAL		NEXT HIGHER ASSY.		SIZE CODE D IAD 7009026-0-0
FINISH		SCALE		NUMBER
		SHEET 2 OF 2		

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

REV. 1-0-66 MS93-0-1

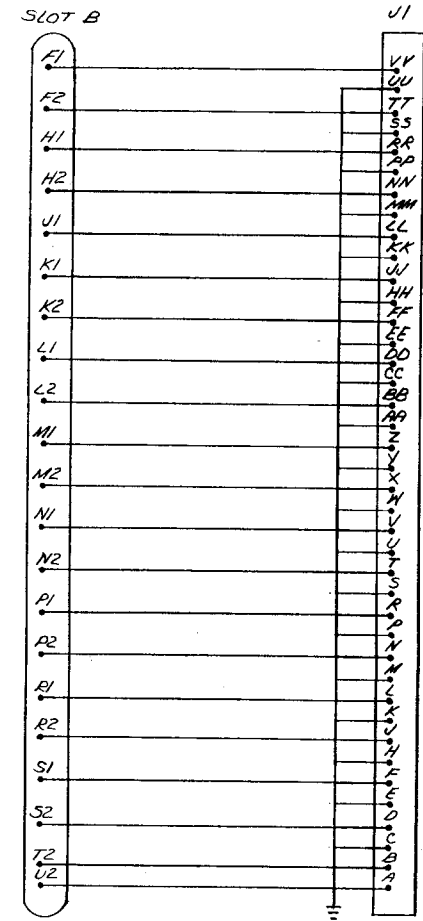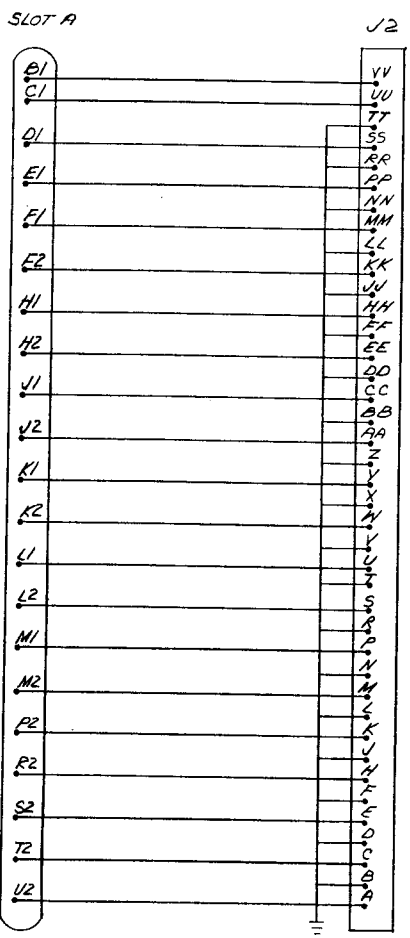


BRUNING 40-522 15840
 DEC 1 DRW NO DRD 102-B

FIRST USED ON OPTION/MODEL RK8-E	QTY.	DESCRIPTION	PART NO.	ITEM NO.
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES	DRN. <i>M. P. ...</i> CHKD. <i>M. P. ...</i>	DATE 10/17/72	 digital EQUIPMENT CORPORATION <small>NATYARD MASSACHUSETTS</small>	
DECIMALS XXX - 006 XX - 02 X - .1	ANGLES ±0° 30'	DATE 10/17/72	TITLE RK8 CONTROL CABLE MODULE	
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓	PROD. <i>R. K. ...</i>	DATE 10-13-72	SIZE CODE D-AD 7009026 0-0	NUMBER D CS M993-0-1
MATERIAL ---	NEXT HIGHER ASSY.		SCALE ---	REV.
FINISH ---	SHEET 3 OF 3	DIST.		

THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY. COPYRIGHT 1970 BY DIGITAL EQUIPMENT CORPORATION

REV. B
 NUMBER H851-0-1
 SIZE CODE B CS

SLOT 1

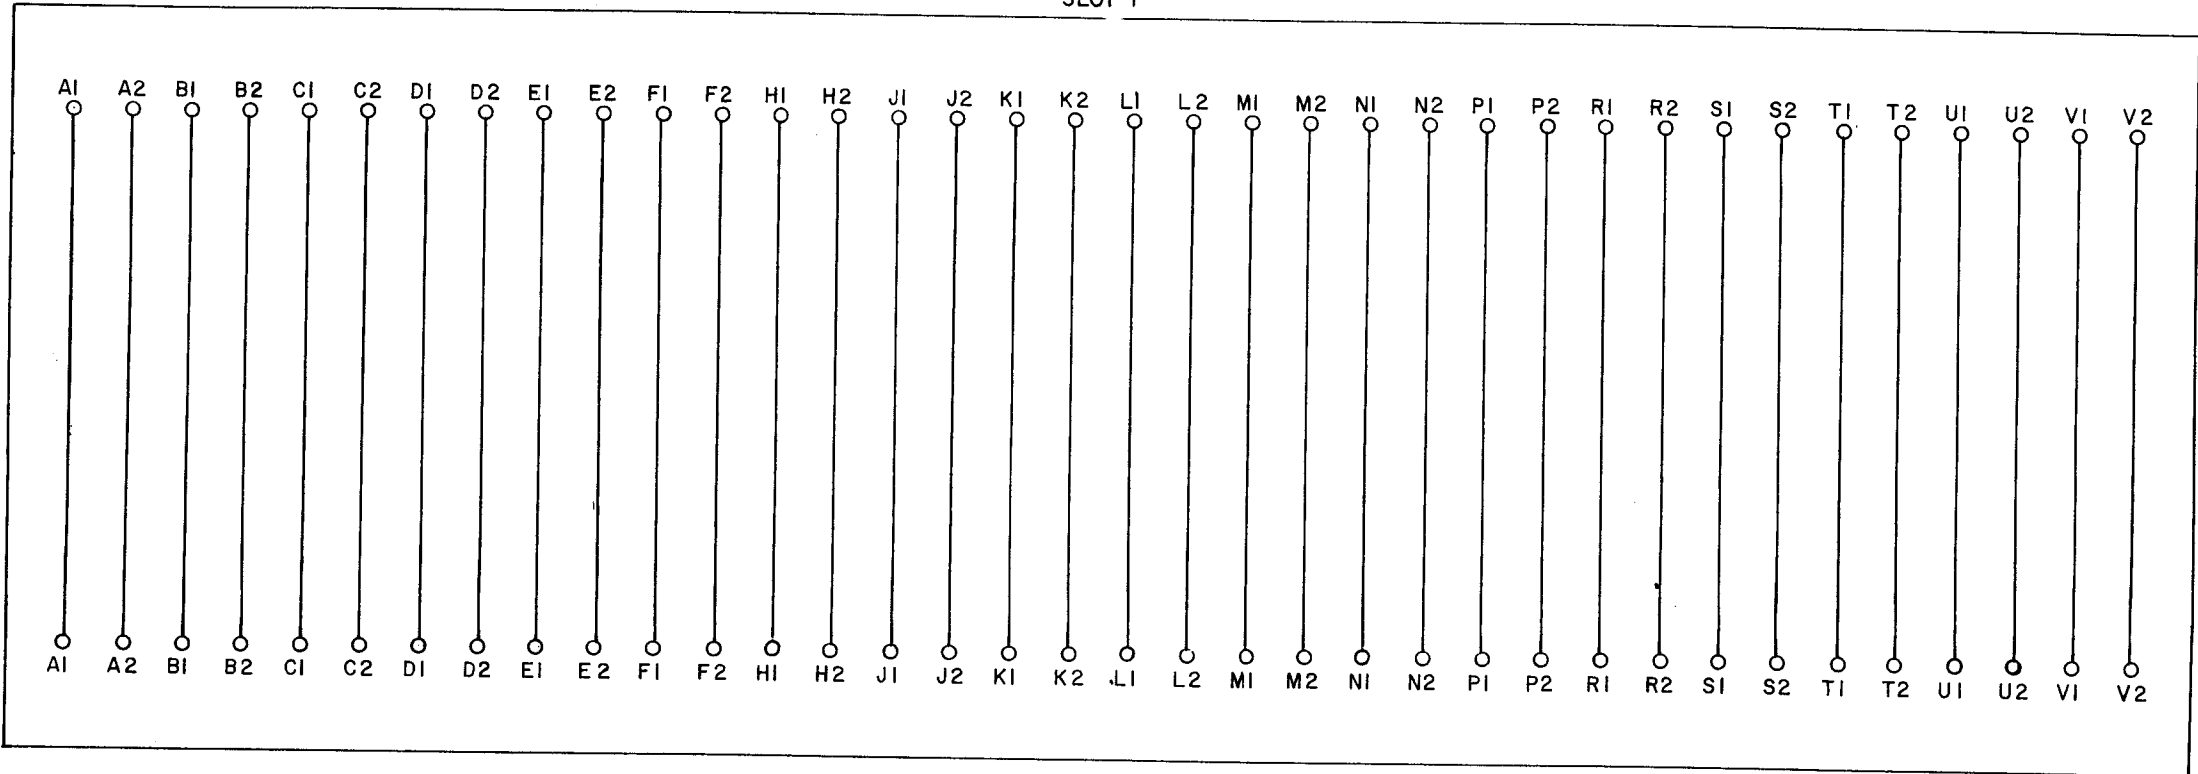

SLOT 2

UNLESS OTHERWISE INDICATED:
 CONNECTOR IS A 1210152


REVISIONS	CHK	CHG NO.	REV.
		00002	B
B.G. 8-3-78			
P. GARDNER			
J.G. 8-3-78			

DRN. jeanne french	DATE 7/29/70
CHK'D <i>[Signature]</i>	DATE 1-29-71
ENG. <i>[Signature]</i>	DATE 1-29-71
PROD.	DATE

TRANSISTOR & DIODE CONVERSION CHART			
DEC	EIA	DEC	EIA

digital
 EQUIPMENT CORPORATION
 MAYNARD, MASSACHUSETTS

TITLE EDGE CONNECTOR H851			
SIZE B	CODE CS	NUMBER H851-0-1	REV. B
PRINTED CIRCUIT REV.			C

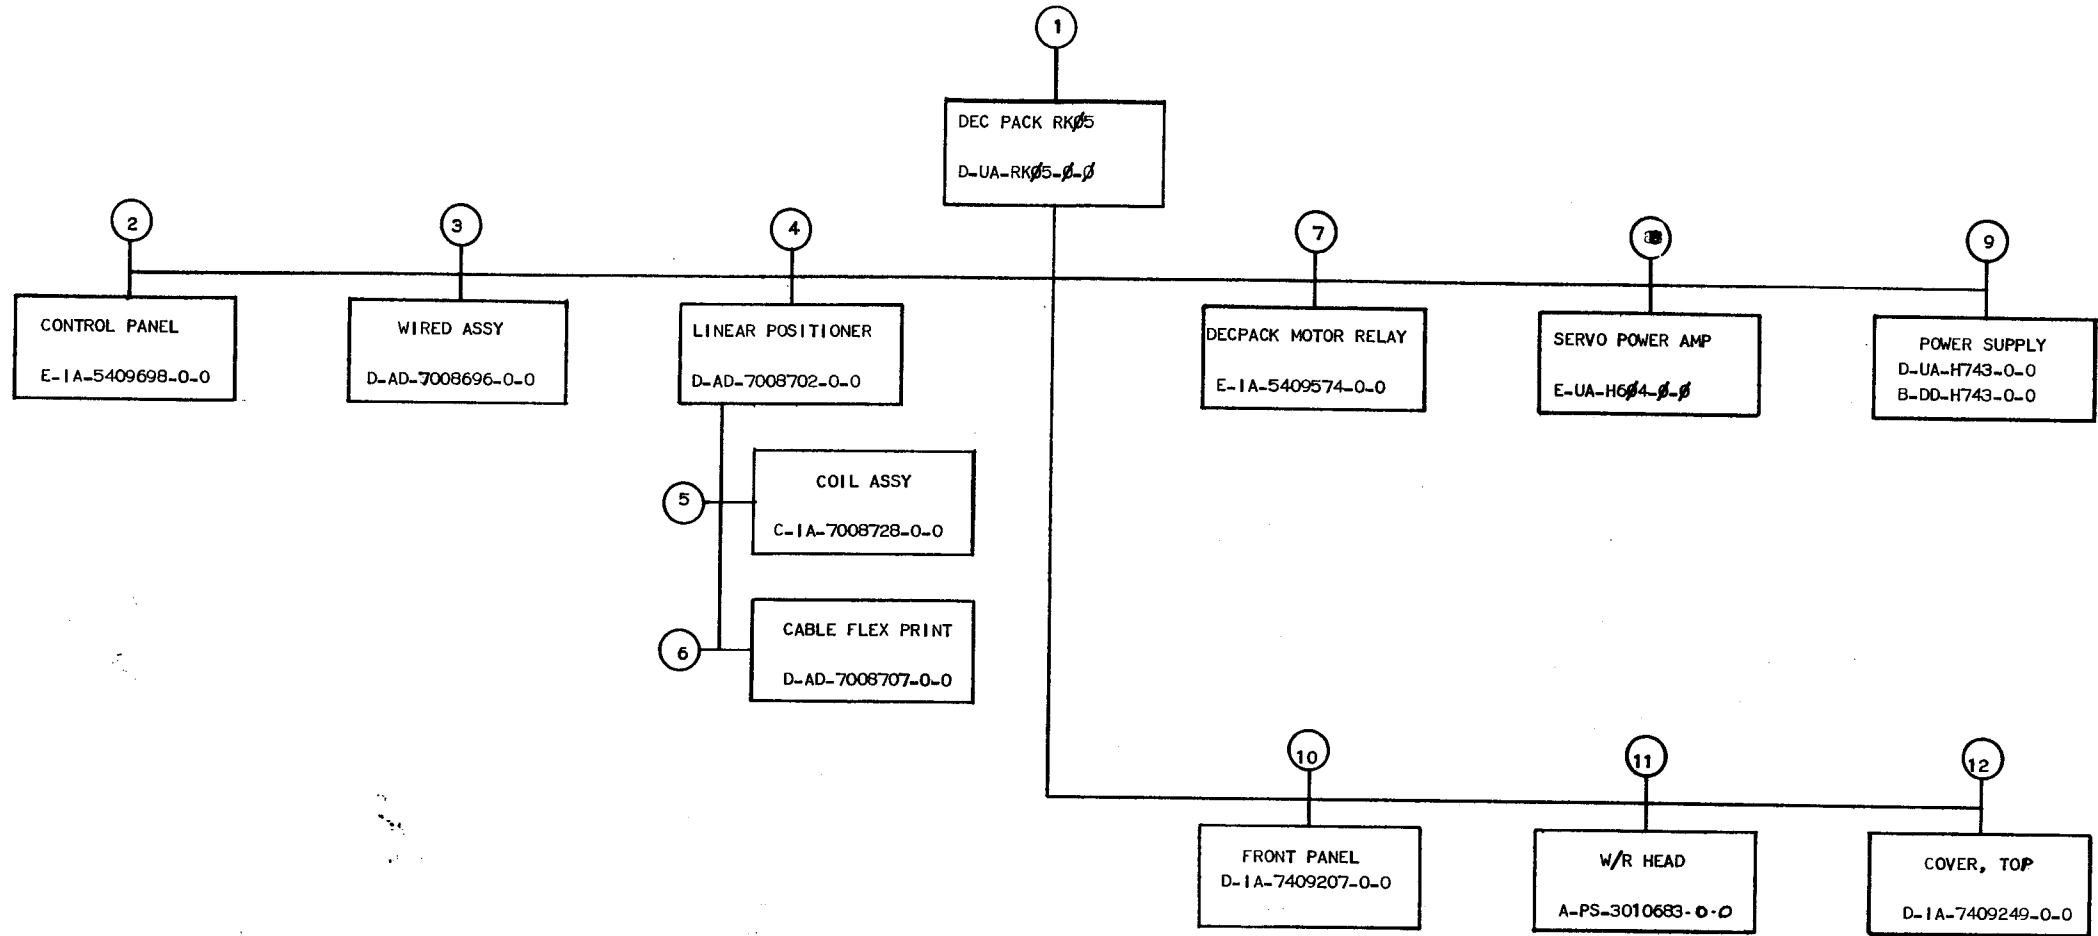

TITLE	SIZE	CODE	NUMBER	REV
DECPACK ASSY	B	DD	RK05-β	C
SHEET 2 OF 5				

DIGITAL EQUIPMENT CORPORATION WORLD-WIDE SALES AND SERVICE

146 Main Street, Maynard, Massachusetts, U.S.A. 01754
Telephone: From Metropolitan Boston: 646-8600 • Elsewhere: (617)-897-5111
TWX: 710-347-0212 Cable: DIGITAL MAYN Telex: 94-8457

UNITED STATES

NORTHEAST

REGIONAL OFFICE

275 Wyman Street, Waltham, Massachusetts 02154
Telephone: (617)-890-0320/0330 TWX: 710-324-6919

WALTHAM

15 Lunda Street, Waltham, Massachusetts 02154
Telephone: (617)-891-1030 TWX: 710-324-6919

CAMBRIDGE/BOSTON

899 Main Street, Cambridge, Massachusetts 02139
Telephone: (617)-491-6130 TWX: 710-320-1167

ROCHESTER

130 Allens Creek Road, Rochester, New York 14618
Telephone: (716)-461-1700 TWX: 710-253-3078

CONNECTICUT

240 Pomeroy Ave., Meriden, Conn. 06450
Telephone: (203)-237-8441/7466 TWX: 710-461-0054

MID-ATLANTIC — SOUTHEAST

REGIONAL OFFICE:

U.S. Route 1, Princeton, New Jersey 08540
Telephone: (609)-452-2940 TWX: 510-685-2338

NEW YORK

95 Cedar Lane, Englewood, New Jersey 07631
Telephone: (201)-871-4984, (212)-594-6955, (212)-736-0447
TWX: 710-991-9721

NEW JERSEY

1259 Route 46, Parsippany, New Jersey 07054
Telephone: (201)-335-3300 TWX: 710-987-8319

PRINCETON

U.S. Route 1
Princeton, New Jersey 08540
Telephone: (609)-452-2940 TWX: 510-685-2338

LONG ISLAND

1 Huntington Quadrangle
Suite ISO7 Huntington Station, New York 11746
Telephone: (516)-694-4131, (212)-895-8095

PHILADELPHIA

Station Square Three, Paoli, Pennsylvania 19301
Telephone: (215)-647-4900/4410 Telex: 510-668-8395

WASHINGTON

Executive Building
6811 Kenilworth Ave., Riverdale, Maryland 20840
Telephone: (301)-779-1600/752-8787 TWX: 710-826-9662

DURHAM/CHAPEL HILL

2704 Chapel Hill Boulevard
Durham, North Carolina 27707
Telephone: (919)-489-3347 TWX: 510-927-0912

ORLANDO

Suite 130, 7001 Lake Ellenor Drive, Orlando, Florida 32809
Telephone: (305)-851-4450 TWX: 810-850-0180

ATLANTA

2815 Clearview Place, Suite 100,
Atlanta, Georgia 30340
Telephone: (404)-451-3734/3735/3736 TWX: 810-757-4223

INTERNATIONAL

EUROPEAN HEADQUARTERS

Digital Equipment Corporation International Europe
81 Route de l'Aire
1211 Geneva 26, Switzerland
Telephone: 42 79 50 Telex: 22 683

MID-ATLANTIC — SOUTHEAST (cont.)

KNOXVILLE

6311 Kingston Pike, Suite 21E
Knoxville, Tennessee 37919
Telephone: (615)-588-6571 TWX: 810-583-0123

CENTRAL

REGIONAL OFFICE:

1850 Frontage Road, Northbrook, Illinois 60062
Telephone: (312)-498-2500 TWX: 910-686-0655

PITTSBURGH

400 Penn Center Boulevard
Pittsburgh, Pennsylvania 15235
Telephone: (412)-243-9404 TWX: 710-797-3657

CHICAGO

1850 Frontage Road, Northbrook, Illinois 60062
Telephone: (312)-498-2500 TWX: 910-686-0655

ANN ARBOR

230 Huron View Boulevard, Ann Arbor, Michigan 48103
Telephone: (313)-761-1150 TWX: 810-223-6053

INDIANAPOLIS

21 Beachway Drive — Suite G
Indianapolis, Indiana 46224
Telephone: (317)-243-8341 TWX: 810-341-3436

MINNEAPOLIS

Suite 111, 8030 Cedar Avenue South,
Minneapolis, Minnesota 55420
Telephone: (612)-854-6562-3-4-5 TWX: 910-576-2818

CLEVELAND

Park Hill Bldg., 35104 Euclid Ave.
Willoughby, Ohio 44094
Telephone: (216)-946-8464 TWX: 810-427-2608

ST. LOUIS

Suite 110, 115 Progress Pky., Maryland Heights,
Missouri 63043
Telephone: (314)-878-4310 TWX: 910-764-0831

DAYTON

3101 Kettering Blvd., Dayton, Ohio 45439
Telephone: (513)-239-7377 TWX: 810-459-1676

MILWAUKEE

8531 W. Capitol Drive, Milwaukee, Wisconsin 53222
Telephone: (414)-463-9110 TWX: 910-262-1199

DALLAS

8855 North Stemmons Freeway
Dallas, Texas 75247
Telephone: (214)-638-4880 TWX: 910-861-4000

HOUSTON

3417 Milam Street, Suite A, Houston, Texas 77002
Telephone: (713)-524-2961 TWX: 910-881-1651

SWEDEN

Digital Equipment Aktiefolag

STOCKHOLM

Vretenvagen 2, S-171 54 Solna, Sweden
Telephone: 98 13 90 Telex: 170 50
Cable: Digital Stockholm

CENTRAL (cont.)

NEW ORLEANS

3100 Ridgelake Drive, Suite 108
Metairie, Louisiana 70002
Telephone: 504-837-0257

WEST

REGIONAL OFFICE

310 Soquel Way, Sunnyvale, California 94086
Telephone: (408)-735-9200

ANAHEIM

801 E. Ball Road, Anaheim, California 92605
Telephone: (714)-776-6932/8730 TWX: 910-59-1189

WEST LOS ANGELES

1510 Cotner Avenue, Los Angeles, California 90025
Telephone: (213)-479-3791/4318 TWX: 910-342-8993

SAN DIEGO

3444 Hancock Street
San Diego, California 92110
Telephone: (619)-298-0591, 0593 TWX: 910-335-1230

SAN FRANCISCO

1400 Terra Bella
Mountain View, California 94040
Telephone: (415)-964-6200 TWX: 910-373-1266

PALO ALTO

560 San Antonio Rd., Palo Alto, California 94306
Telephone: (415)-969-6200 TWX: 910-373-1266

OAKLAND

7850 Edgewater Drive
Oakland, California 94621
Telephone: (415)-635-5453/7830 TWX: 910-336-7238

ALBUQUERQUE

6303 Indian School Road, N.E.
Albuquerque, N.M. 87110
Telephone: (505)-296-5411/5428 TWX: 910-989-0614

DENVER

2305 South Colorado Blvd., Suite #5
Denver, Colorado 80222
Telephone: (303)-757-3332/758-1656/758-1659
TWX: 910-931-2650

SEATTLE

1521 130th N.E., Bellevue, Washington 98005
Telephone: (206)-454-4058/455-5404 TWX: 910-443-2306

SALT LAKE CITY

431 South 3rd East, Salt Lake City, Utah 84111
Telephone: (801)-328-9838 TWX: 910-925-5834

PHOENIX

4358 East Broadway Road
Phoenix, Arizona 85040
Telephone: (602)-268-3488 TWX: 910-950-4691

PORTLAND

Suite 168
5319 S.W. Canyon Court, Portland, Ore. 97221
Telephone: (503)-297-3761/3765

NEW ZEALAND

Digital Equipment Corporation Ltd.

AUCKLAND

Hilton House, 430 Queen Street, Box 2471 A,
Auckland, New Zealand
Telephone: 75-533

INTERNATIONAL (cont.)

FRANCE

Equipment Digital S.A.R.L.

PARIS

327 Rue de Charenton, 75 Paris 12^{ème}, France
Telephone: 344-76-07 Telex: 21339

GRENOBLE

10 rue Auguste Ravier, F-38 Grenoble, France
Telephone: (76) 87 87 32 Telex: 32 882 F (Code 212)

GERMANY

Digital Equipment GmbH

MUNICH

8 Muenchen 13, Wallensteinplatz 2
Telephone: 0811-35031 Telex: 524-226

COLOGNE

5 Koeln, Bismarckstrasse 7,
Telephone: 0221-522181 Telex: 888-2269
Telegram: Flip Chip Koeln

FRANKFURT

6078 Neu-Isenburg 2
Am Forsthaus Gravenbruch 5-7
Telephone: 06102-5526 Telex: 41-76 82

HANNOVER

3 Hannover, Podbielskistrasse 102
Telephone: 0511-69-70-95 Telex: 922-952

AUSTRIA

Digital Equipment Corporation Ges.m.b.H.

VIENNA

Mariahilferstrasse 136, 1150 Vienna 15, Austria
Telephone: 85 51 86

UNITED KINGDOM

Digital Equipment Co., Ltd.

U.K. HEADQUARTERS

Arkwright Road, Reading, Berks.
Albuquerqure, N.M. 87110
Telephone: (505)-296-5411/5428 TWX: 910-989-0614

READING

The Evening Post Building, Tessa Road
Reading, Berks.

BIRMINGHAM

29/31, Birmingham Road, Sutton Coldfield, Warwicks.
Telephone: (0044) 21-355 5501 Telex: 337 060

MANCHESTER

13 Upper Precinct, Walkden, Manchester M28 5AZ
Telephone: 061-790-8411 Telex: 668666

LONDON

Bilton House, Uxbridge Road, Ealing, London W.5.
Telephone: 01-579-2334 Telex: 22371

EDINBURGH

Shiel House, Craigshall, Livingston,
West Lothian, Scotland
Telephone: 02705 / Telex: 727113

NETHERLANDS

THE HAGUE

Digital Equipment N.V.
Sir Winston Churchilllaan 370
Rijswijk/The Hague, Netherlands
Telephone: 070-995-160 Telex: 32533

BELGIUM

BRUSSELS

Digital Equipment N.V./S.A.
108 Rue D'Arion
1040 Brussels, Belgium
Telephone: 02-139256 Telex: 25297

NORWAY

Digital Equipment

OSLO

c/o Firma Service
Waldenmarthanesgate 84-B-86
Oslo 1, Norway
Telephone: 37 19 85, 27 02 30 Telex: 166 43

DENMARK

Digital Equipment Corporation

COPENHAGEN

Vesterbrogade 140, 1620 Copenhagen V

SWITZERLAND

Digital Equipment Corporation S.A.

GENEVA

81 Route de l'Aire
1211 Geneva 26, Switzerland
Telephone: 42 79 50 Telex: 22 683

ZURICH

Scheuchzerstrasse 21
CH-8006 Zurich, Switzerland
Telephone: 01/60 35 66 Telex: 56059

ITALY

Digital Equipment S.p.A.

MILAN

Corso Garibaldi 49, 20121 Milano, Italy
Telephone: 872 748 694 394 Telex: 33615

SPAIN

MADRID

Ataio Ingenieros S.A., Enrique Larreta 12, Madrid 16
Telephone: 215 35 43 / Telex: 27249

BARCELONA

Ataio Ingenieros S.A., Ganduxer 76, Barcelona 6
Telephone: 221 44 66
Digital Equipment Corporation Ltd.

AUSTRALIA

Digital Equipment Australia Pty. Ltd.

SYDNEY

P.O. Box 491, Crows Nest
N.S.W. Australia 3065
Telephone: 439-2566 Telex: AA20740
Cable: Digital, Sydney

MELBOURNE

60 Park Street, South Melbourne, Victoria, 3205
Telephone: 696-142 Telex: AA40616

PERTH

643 Murray Street
West Perth, Western Australia 6005
Telephone: 214-993 Telex: AA92140

BRISBANE

139 Merivale Street, South Brisbane
Queensland, Australia 4101
Telephone: 444-047 Telex: AA40616

ADELAIDE

6 Montrose Avenue
Norwood, South Australia 5067
Telephone: 631-339 Telex: AA82225

CANADA

Digital Equipment of Canada, Ltd.

CANADIAN HEADQUARTERS

150 Rosamond Street, Carleton Place, Ontario
Telephone: (613)-257-2615 TWX: 610-561-1651

OTTAWA

120 Holland Street, Ottawa 3, Ontario K1Y 0X7
Telephone: (613)-725-2193 TWX: 610-562-8907

TORONTO

230 Lakeshore Road East, Port Credit, Ontario
Telephone: (416)-274-1241 TWX: 610-492-4306

MONTREAL

9675 Cote de Liesse Road
Dorval, Quebec, Canada 760
Telephone: 514-636-9393 TWX: 610-422-4124

EDMONTON

5531 - 103 Street
Edmonton, Alberta, Canada
Telephone: (403)-434-9333 TWX: 610-831-2248

VANCOUVER

Digital Equipment of Canada, Ltd.
2210 West 12th Avenue
Vancouver 9, British Columbia, Canada
Telephone: (604)-736-5616 TWX: 610-929-2006

ARGENTINA

Buenos Aires

Coasin S.A.
Virrey del Pino 4071, Buenos Aires
Telephone: 52-3185 Telex: 012-2284

VENEZUELA

CARACAS

Coasin S.A. (Sales only)
Apartado 50939
Salana Grande No. 1, Caracas
Telephone: 72-9637 Cable: INSTRUVEN

CHILE

SANTIAGO

Coasin Chile Ltda. (sales only)
Casilla 14588, Correo 15, Santiago
Telephone: 396713 Cable: COACHIL

JAPAN

TOKYO

Rikei Trading Co., Ltd. (sales only)
Kozato-Kaikan Bldg.
No. 18-14, Nishishimbashi 1-chome
Minato-Ku, Tokyo, Japan
Telephone: 5915246 Telex: 781-4208
Digital Equipment Corporation International
Kowa Building No. 17, Second Floor
2-7 Nishi-Azabu 1-Chome
Minato-Ku, Tokyo, Japan
Telephone: 404-5894/6 Telex: TK-6428

PHILIPPINES

Stanford Computer Corporation
P.O. Box 1608
416 Dasmariñas St., Manila
Telephone: 49-68-96 Telex: 742-0352

INDIA

H.S. Sonawala Mg Director (Sales Only)
HINDITRON SERVICES PUT LTD.
69/A Nepean Sea Road
Bombay, India